

Switch Mode Power Supply (15/30/60/120/240/480-W Models)

S8VK-G01524

Image

Case model, Input: 100 to 240 VAC, Power rating 15 W, Output: 24 VDC, Terminal blocks (Rod terminal), Parallel operation, Harmonic current emissions

Power rating	15 W
Output voltage	24 VDC
Rated input voltage	100 to 240 VAC
Construction	Covered type
Connection	Terminal blocks
Terminal type	Rod terminal

Specifications

As of February 2, 2017

Power rating		15 W
Output voltage		24 VDC
Efficiency		83% typ. (at 100 VAC input) 81% typ. (at 200 VAC input)
Input	Rated input voltage	100 to 240 VAC
	Allowable input voltage variable range	85 to 264 VAC (Single-phase) 90 to 350 VDC
	Note at DC input	The following safety standards apply to a DC input: UL 60950-1, cUR (CSA C22.2 No. 60950-1), EN 50178, EN 60950-1, and Lloyd's. For a DC input, safety is ensured by an external fuse. Please select for external fuse 3 A 350 VDC or more.
	Frequency	50/60Hz (47 to 450 Hz)
	Rated input current	0.35 A typ. (at 100 VAC input) 0.25 A typ. (at 200 VAC input)
	Leakage current	0.5 mA max. (at 100 VAC input) 1.0 mA max. (at 200 VAC input)
	Inrush current	16 A typ. (For cold start at 25 °C) (at 100 VAC input) 32 A typ. (For cold start at 25 °C) (at 200 VAC input)
Output	Rated output current	0.65 A
	Output voltage variable range	-10 to +15% (With V.ADJ)
	Maximum peak current	0.78 A
	Ripple	150 mV(p-p) max. (20 MHz)

	Static input variation influence	0.4% max.
	Static load variation influence	0.8% max.
	Ambient temperature variation influence	0.05%/°C max.
	Start up time	600 ms typ. (at 100 VAC input) 400 ms typ. (at 200 VAC input)
	Hold time	20 ms typ. (at 100 VAC input) 100 ms typ. (at 200 VAC input)
Additional functions	Overload protection	Yes, Automatic reset
	Overvoltage protection	Yes, Shut off the input voltage and turn on the input again
	Series operation	Yes (Up to 2 Power Supplies with external diode)
	Parallel operation	Yes (Up to 2 Power Supplies)
	Output indicator	Yes (color: green, lighting from 80 to 90% or more of rated voltage)
Insulation	Dielectric strength	Between all input terminals and all output terminals: 3 kVAC for 1 min, Cut-off current: 20 mA Between all input terminals and PE terminals: 2 kVAC for 1 min, Cut-off current: 20 mA Between all output terminals and PE terminals: 1 kVAC for 1 min, Cut-off current: 20 mA
	Insulation resistance	Between all output terminals and all input terminals/ PE terminals: 100 MΩ min., at 500 VDC
Environment	Vibration resistance	10 to 55 Hz, 0.375 mm single amplitude in each 3 directions for 2 hours
	Shock resistance	150 m/s**2, in each 6 directions 3 times
	Ambient temperature (Operating)	-40 to 70°C
	Ambient temperature (Storage)	-40 to 85°C
	Ambient humidity (Operating)	0 to 95%
	Ambient humidity (Storage)	0 to 95%
Reliability	MTBF	135,000 hours min.
	Life expectancy	10 years (at rated input, a load rate of 50% load, under the temperature of 40 °C, standard mounting)
Construction	Construction	Covered type
	Connection	Terminal blocks
	Terminal type	Rod terminal
	Mounting	DIN track mounting
	Cooling fan	Cooling fan No
	Degree of protection	IP20, EN/IEC 60529
	Weight (Main)	Approx. 150 g


Note

Do not use the Inverter output for the Power Supply. Inverters with an output frequency of 50/60 Hz are available, but the rise in the internal temperature of the Power Supply may result in ignition or burning.

As of February 2, 2017

Dimension

As of February 2, 2017

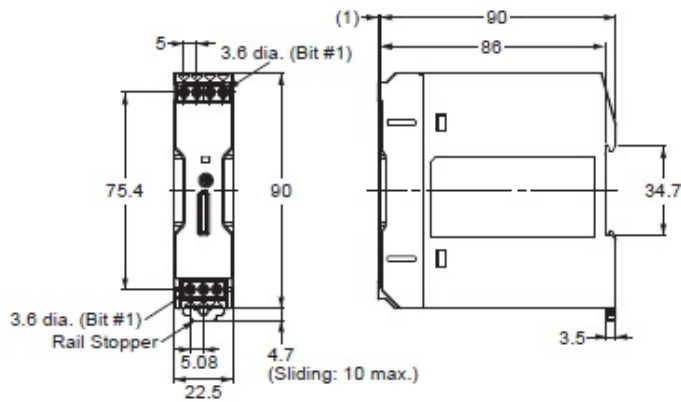

As of February 2, 2017

Mounting

As of February 2, 2017


Mounting state

Mounting


(A) Standard (Vertical) mounting



(B) Face-up mounting



(C) Side mounting only for 15 W

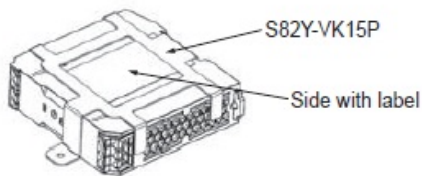

Side mounting only for S8VK-G015□□.

Use a mounting bracket (S82Y-VK15P, sold separately) when the product is mounted horizontally.

Heat dissipation will be adversely affected. When the product is mounted facing horizontally, always place the side with label facing horizontally.


As of February 2, 2017

Connection diagram

As of February 2, 2017

Terminal arrangement


S8VK-G015□□

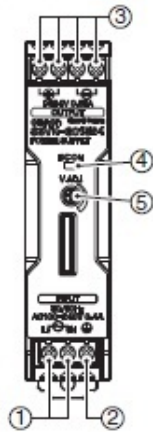

No.	Name	Function
1	Input terminals (L, N)	Connect the input lines to these terminals. *1
2	Protective Earth terminal (PE)	Connect the ground line to this terminal. *2
3	DC Output terminals (-V), (+V)	Connect the load lines to these terminals.
4	Output indicator (DC ON: Green)	Lights while a direct current (DC) output is ON.
5	Output voltage adjuster (VADJ)	Use to adjust the voltage.

*1. The fuse is located on the (L) side. It is not user-replaceable. For a DC input, connect the positive voltage to the L terminal.
 *2. This is the protective earth terminal specified in the safety standards. Always ground this terminal.

Block diagram

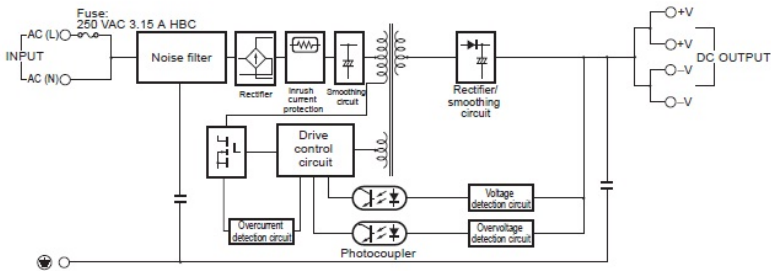


As of February 2, 2017

Derating curve

As of February 2, 2017

15, 30, 240 W (S8VK-G015□□, S8VK-G030□□, S8VK-G240□□)



- Note:**
- At less than 90 VAC, the derating is 2.5%/V
 - For a DC power input, reduce the load given in the above derating curve by multiplying the following coefficients.
 S8VK-G015□□: 1.0
 S8VK-G030□□: 0.9
 S8VK-G240□□: 0.8
 - See “-40°C Operation Guarantee Condition”
- A. Standard mounting
 60°C and over: the derating is 2.5%/°C
- B. Face-up mounting / Side mounting (15W only)
 50°C and over: the derating is 2.5%/°C

-40°C Operation Guarantee Condition

The unit can start up and operate normally at -40°C, but the following criteria will be inferior to the values of datasheet. Please consider these influences.

		15 W 5 V	15 W 12 V	15 W 24 V	30 W 5 V	30 W 12 V	30 W 24 V	240 W 24 V	240 W 48 V
Ripple (Typ.)	230 VAC input	280 mV	170 mV	100 mV	110 mV	330 mV	180 mV	840 mV	1220 mV
Ripple (Max.)	230 VAC input	830 mV	450 mV	220 mV	240 mV	630 mV	290 mV	1030 mV	1320 mV
Start up time (Typ.)	230 VAC input	420 ms	440 ms	490 ms	410 ms	440 ms	480 ms	230 ms	280 ms
Hold time (Typ.)	230 VAC input	88 ms	110 ms	109 ms	137 ms	112 ms	114 ms	35 ms	37 ms

As of February 2, 2017