



POSITION TRANSDUCERS 0...100%

DB-PA, -PF

FUNCTION



The transducers supply a position signal to modulating control damper actuators, proportionally according to the knob position from 0 to 100%. An analog input signal allows the use of the transducer with a regulator (override function). The maximum voltage between the voltage supplied by the transducer and the voltage supplied by the regulator, connected to the override control input, is sent to the actuator.

APPLICATIONS

Designed as wall (PA) or front (PF) mounting accessory

TYPE	OUTPUT SIGNAL	CONTROL SIGNAL (override control)	MOUNTING
DB-PA	0(2)...10 Vdc ($R_{load} > 6K\Omega$)	0(2)...10 Vdc	wall
DB-PF	0(2)...10 Vdc ($R_{load} > 6K\Omega$)	0(2)...10 Vdc	front - end

DIMENSIONS (mm)

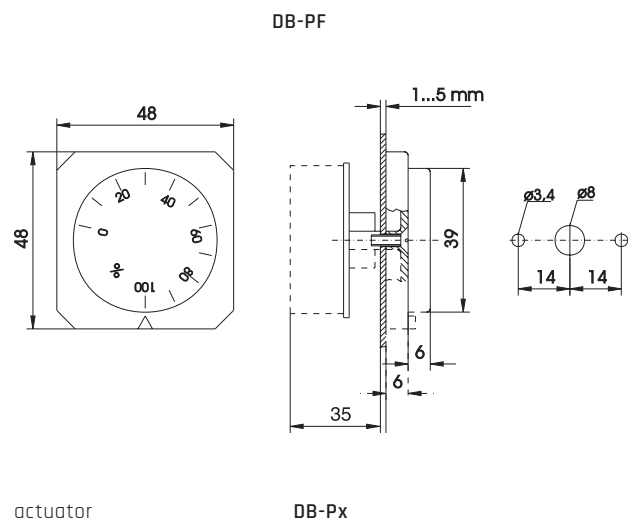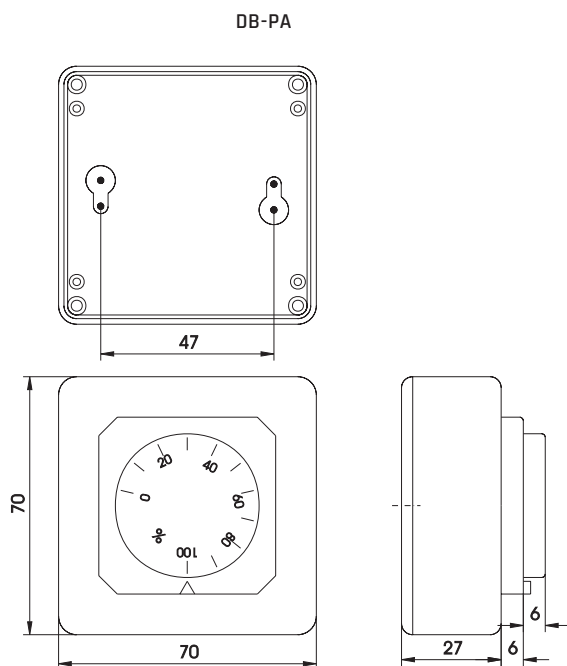

actuator

