



Products for HVAC/R

2020



“Over 70 countries
around the world
trust our quality
products”



We are here for you!

Now you're just a page away from getting to know our vast 2020 product range. Before you get started we want you to know that we are here for you. Our sales team and customer support are eager to assist and attend to any given challenge.

- This catalogue shows only a part of our assortment. As we produce our products in-house, we can adapt a product to your specific needs or offer additional models. If you have special requirements we are just an e-mail or a phone call away.
- Are you interested in complete solutions? At Industrietechnik we can offer packages that include products that are not part of our ordinary assortment.
- We offer professional support during working hours 8:00–17:00

Don't hesitate to contact us. Our dedicated sales and support team are looking forward to talking to you.

PRODUCT SALES & SUPPORT

+39 0472 830626 | info@industrietechnik.it

WWW.INDUSTRIEOTECHNIK.IT



**“EXPERIENCE, EXPERTISE AND CAPACITY OF LISTENING ARE THE FOUNDATIONS
FOR A CUSTOMER-ORIENTED CONSULTING”**

Table of contents

1	PRE-PROGRAMMED CONTROLLERS	21
2	ELECTRONIC THERMOSTATS	37
3	ELECTROMECHANICAL THERMOSTATS	47
4	ELECTRIC HEATING CONTROLLERS	59
5	SENSORS, TRANSMITTERS AND SWITCHES	65
6	WIRELESS PRODUCTS	107
7	DAMPER ACTUATORS	111
8	VALVES AND VALVE ACTUATORS	121
9	PRESENCE AND SMOKE DETECTORS	159
10	MISCELLANEOUS PRODUCTS	163
	INDEX	167

COMPANY PRESENTATION

P



THERMOSTATS AND CONTROLLERS

1



ELECTRONIC THERMOSTATS

2



ELECTROMECHANICAL THERMOSTATS

3



ELECTRIC HEATING CONTROLLERS

4



SENSORS, TRANSMITTERS AND SWITCHES

5



WIRELESS PRODUCTS

6



DAMPER ACTUATORS

7



VALVES AND ACTUATORS

8



PRESENCE AND SMOKE DETECTORS

9











MISCELLANEOUS PRODUCTS

10

INDEX

I

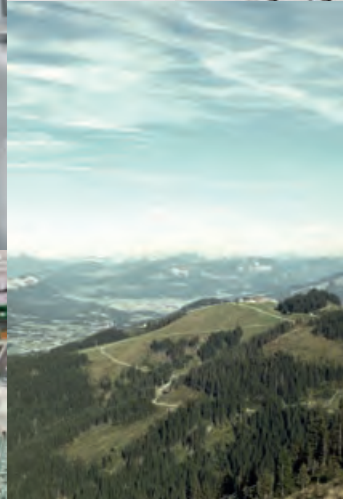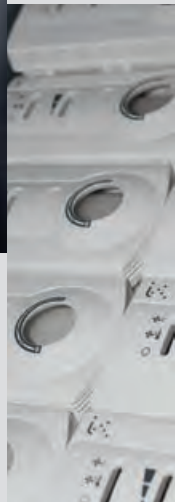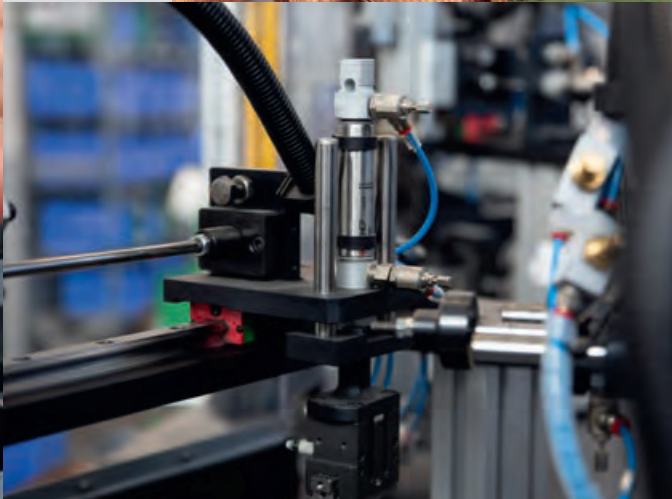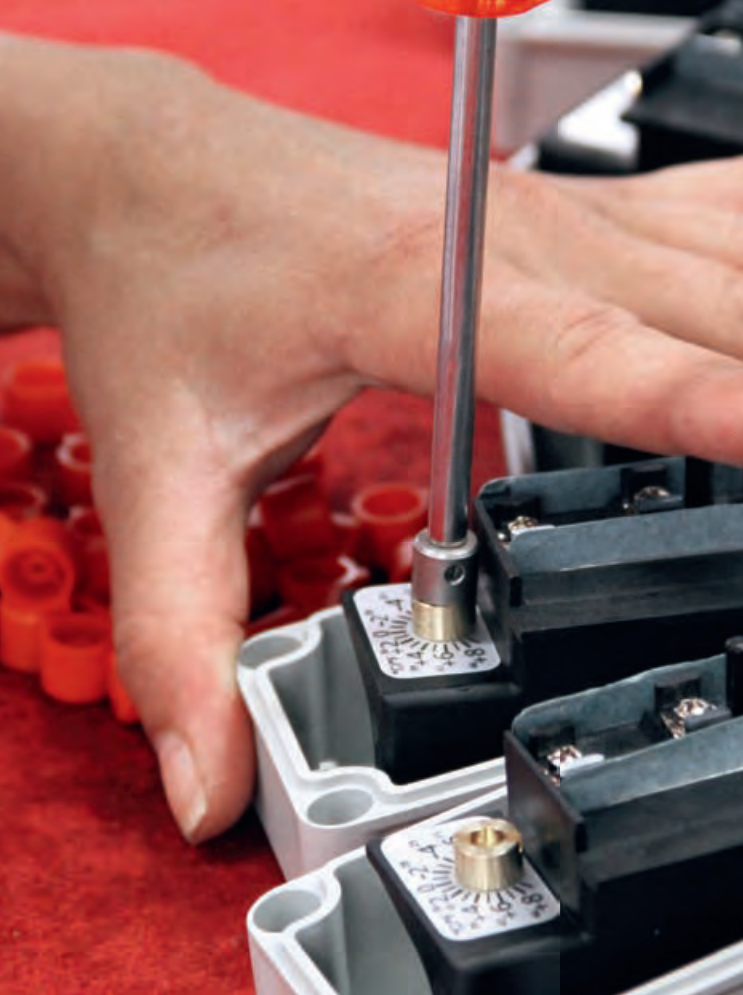



Industrietechnik – We have been on the market for 40 years

Ever since Industrietechnik was established in 1981, the very foundation of our company has been our ability to listen. In close cooperation with every new customer, we have developed our product range into what it is today – a complete and diverse range of HVAC/R field products for measurement and control in building automation.

Our head office and production site is situated in Brixen, South Tyrol, in the heart of the European Alps at the cultural crossroads of northern and southern Europe. Companies from our region are often known for their quality, long standing experience and extensive know-how. Many businesses in our area are market leaders in their sectors, even in an international context. Our head office hosts offices, R&D, sales, support, our testing facilities and a modern production site with state of the art equipment. This gives us full control over the whole production chain from development and design to production and dispatch. To extend our customer service, we also have a regional office in Milan which includes commercial management, engineering and project management.

Today, we are a leading provider of one of the widest ranges of field devices including valves and actuators, electronic and electro-mechanical devices that can be found on the global market. Together, we sell products to installers, system integrators, wholesalers and OEM-customers in more than 80 countries and we are constantly expanding .

PRODUCT NEWS

2020



CHAPTER

6

Wireless installations for maximum flexibility

Wireless units offer full flexibility in environments where installations are generally difficult to carry out.

SEW-PT1000

An outdoor temperature sensor with option to connect an external PT1000-sensor. It's equipped with indication for signal strength.

SAUW

A room temperature and humidity sensor which also has indication for signal strength.

MR32W

A sensor with Modbus communication capable of handling up to 32 individual sensors. New user interface with a simple menu structure and a display with preview of values, for a quick start-up and handling. It has an isolated communication port to minimize interference.



PAGE
24

The new evolution THS remote control unit is a reality!

We are proud to present the new Evolution Split THS controller, composed of a power unit and display unit for an optimization of the electrical wiring. It makes your system more flexible with the possibility of connecting as many as 7 fan coils to a single master unit. Thanks to its ability to communicate via Modbus, the Evolution Split allows you to monitor all the equipment through a supervisory system.

SHORT FACTS

- Modbus communication
- One Master unit controls up to 7 fan coils
- Common or EC fan control
- Direct electric heater command, valves (3 points, on / off, 0 ... 10V)
- Possibility of CO₂ control with remote transmitter
- Possibility of humidity control
- Reduced electrical wiring



CHAPTER
5

Our temperature sensors make installation easy

Now, our temperature measurement range has been refreshed with a number of product changes. This implies that many of our passive sensors have redesigned casings that make installation even easier.

SHORT FACTS

- Updated models: STC/STM/SI/STI/SE/SC
- New casing offers more space during installation
- Replaceable cable glands giving increased flexibility
- Moulded gasket in unit lid



PAGE

146

Two new energy efficient valves

For the control of hot, cold or glycol-mixed water we now offer VFTRB2 and VFTRB3 -our new 2- and 3-way valves, both PN16 internally threaded models with linear flow characteristics. The valve is completely leakage free in closed position making it very energy efficient. To be paired with SEZ4 actuators. A hand wheel for manual control is supplied with the valve.

SHORT FACTS

- For hot, cold or glycol-mixed water (max. 50% glycol)
- Fluid temperature 1 ... 110 °C
- PN16
- Adjustment capacity 50: 1
- Differential pressure up to 200 kPa
- 0% leakage in closed position



PAGE

135

Another novelty in our range of valves

VFG2..N is our new two-way valve in gunmetal. It has the same technical characteristics as the VFG3 valve and is intended for both heating and domestic water systems.

SHORT FACTS

- For hot, cold or glycol-mixed water (max. 50% glycol)
- Media temperature -5 ... + 185 °C
- PN16
- Rangeability 100: 1
- Dimensions DN15-50



New ball valves and actuators to our range

We have expanded our range of valves with the ball control valves VFBV2, a two-way valve, and VFBV3, a three-way valve. They are internally threaded PN40 valves, capable of handling high shut-off pressures. The actuators for this range of valves are SEB4 (4Nm) / SEB5 (5Nm). SEB4 is used for DN15-25 and SEB5 for DN32-50.

SHORT FACTS

- DN15–50
- Kvs 0.6...63
- -5...+140°C
- PN40
- Removable flow plate for increased flow and on/off function
- Without a flow plate, the three-way valve can also be used as a distribution valve
- Manual handle available as an accessory for use of the valve as a shut-off valve
- Actuators with 0(2)...10 V control signal and 24 V AC supply voltage, or three-position control with 24 V AC or 230 V AC supply voltage



Meet the leading manufacturer

of measurement and control devices for HVAC/R applications

“WE BELIEVE IN PRODUCTS AND SERVICES THAT OUR
CUSTOMERS CAN RELY ON WITH CONFIDENCE”

COMPANY PRESENTATION



HEATING



COOLING



VENTILATION



AIR
APPLICATIONS



WATER
APPLICATIONS



HUMIDITY



PRESSURE



FLOW


We believe in the combination of smart thinking, competence, reliability and the reduction of complexity.

Coming from a multicultural, hard working and ambitious environment, we know that we need to perform outstandingly to succeed on the international market. Industrie-technik was born out of an entrepreneur's dream of developing reliable, quality products to satisfy a big market of HVAC/R customers. He received all the input he needed as he was driving around in his car selling products directly to customers. One of our very first products was a frost protection thermostat - a product that we continue to develop and that is still part of our range.

Close customer relationships

Today, we no longer ring on doorbells - but we know that good products are born from market input. That's why we've developed a company that builds on close customer relationships and our passion to provide products customers can truly rely on. In order to provide the best service and the right product range we always go back to our core values, the very foundation on which we perform work and conduct ourselves.



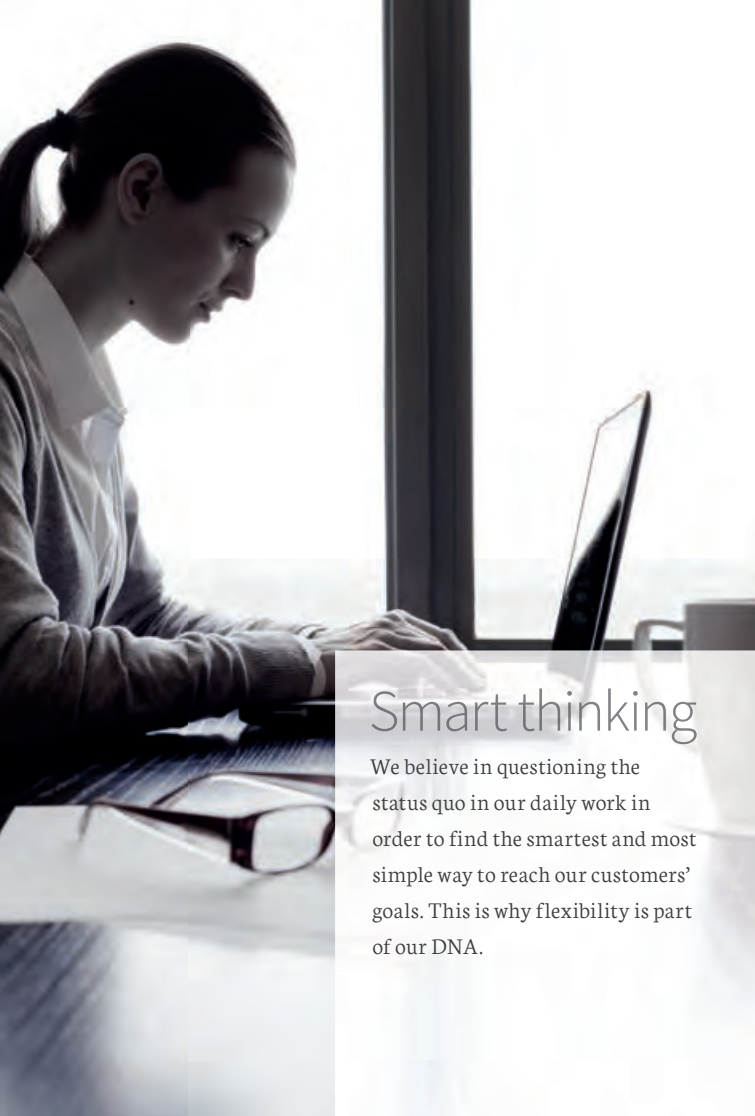

Smart thinking

We believe in questioning the status quo in our daily work in order to find the smartest and most simple way to reach our customers' goals. This is why flexibility is part of our DNA.




Competence

We believe that actively gathering knowledge makes us thinkers with a distinctive and informed point of view.



Reliability

We believe in the simple rule of doing what we say we are going to do, both as individuals and as an organization. We keep our promises.

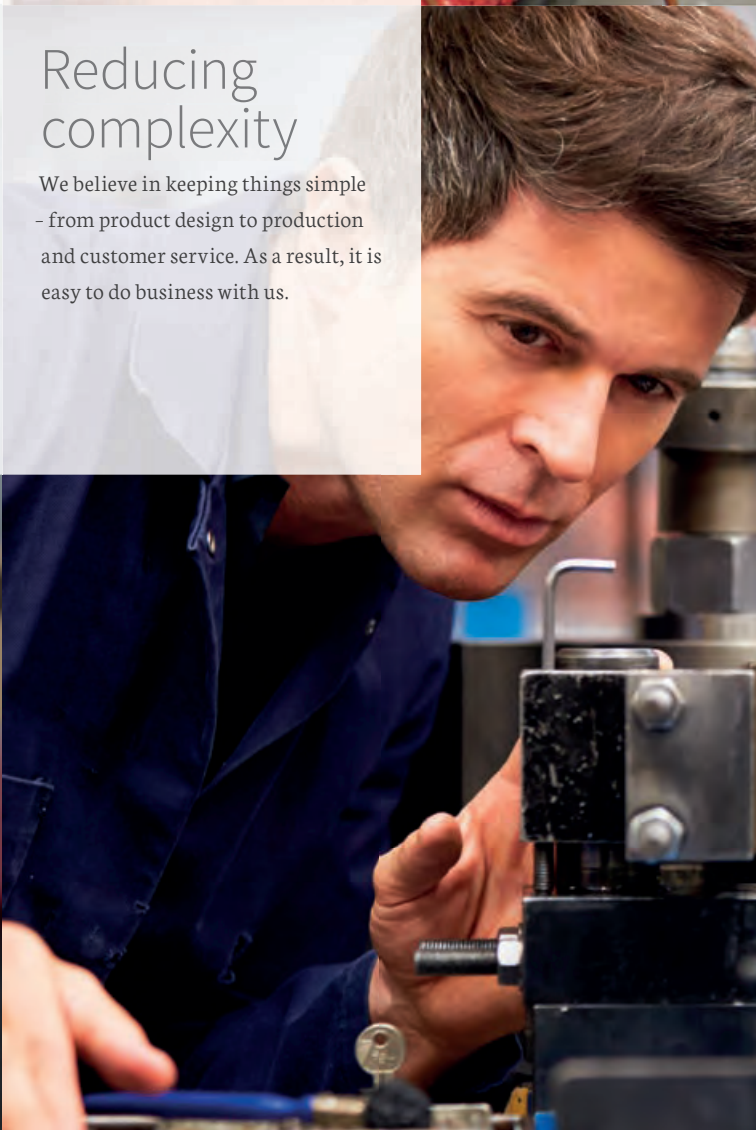

Reducing complexity

We believe in keeping things simple – from product design to production and customer service. As a result, it is easy to do business with us.

We believe that good products often are born out of frustration with the status quo.

The goal of Industrietechnik is to develop and market a full range of field products necessary for HVAC/R applications. Our comprehensive range includes a complete assortment of valves and actuators as well as electronic and electromechanical devices for reliable measurement and control in building automation.

In the field of liquid flow switches and frost protection thermostats, we are one of Europe's leading companies.

Overall, we cover the complete range of application areas from air-liquid flow and quality, temperature and humidity to pressure.

Controlling each step in closely knit teams

Our product development is truly customer driven and we control each step of our entire production process, following rigid internal and external standards. In our large-scale testing area every HVAC/R product is repeatedly subjected to extensive tests. We leave nothing to chance and we believe that only in-house tested and retested products are reliable products that our customers can trust.

Controllers

Room controllers &
Thermostats

Switches

Transmitters

Temperature
sensors

Valves &
Valve actuators

Damper
actuators

Other products





Electric heating controllers



Evolution - Room controller



Room controllers & thermostats



Electronic controllers & thermostats



Electromechanical thermostats



Pressure



Humidity



Flow



Air flow



Level



Temperature & Humidity



CO₂



Pressure



Air velocity



CO & VOC



Wireless



Duct



Average



Immersion



Room



Outdoor



Clamp-on sensors



Cable

PT100
PT1000
NTC1.8
NTC2.2
NTC10-01
NTC10-02
NTC10-03
NTC15
NTC20
NI1000-01
NI1000-02



Heating, cooling & ventilation system



Pressure independent control valves



Butterfly valves



Actuators



Without spring control



With spring return



For fire dampers



Presence protection



Smoke



Transformers



Frost protection unit




Step controllers

We believe that a closely knit organization and smart thinking are essential for the fast and flexible execution of OEM projects.

At Industrietechnik Sales, Purchasing, Development, Economy and Production work side by side. This gives us full insight and control of the entire working process from idea to product and after sales, ensuring quality at every step and on every level of the company. By controlling processes we can plan in advance and optimize our delivery times and at the same time protect customer investments.

This structure makes it possible for us to respond to OEM client demands in a fast and flexible manner. Projects are always coordinated in close cooperation with our customers and in direct communication with our R&D department.

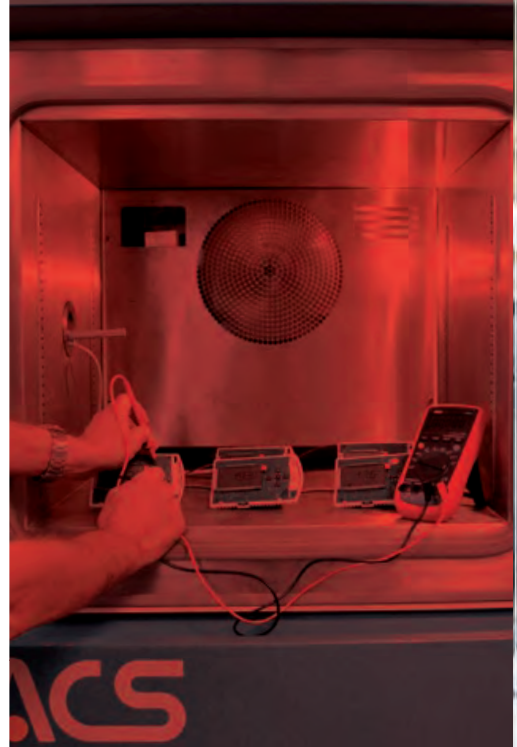



We are listening.

We can handle all kinds of OEM projects, from product branding to in-house programming of software to adapting our products to the need of your specific application. Moreover, the fact that we have very modern production machinery makes it possible for us to provide branded products that are not part of the standard program - and to do so very quickly. We only work with certified suppliers and can handle both small and large volumes.

EXAMPLES OF APPLICATIONS THAT OUR PRODUCTS CAN BE FOUND IN:

- Air handling units
- Fan coils
- Chillers
- Heat exchangers
- Ventilation systems
- Air curtains
- Truck refrigerators



YOUR GRAPHICS, IN YOUR COLOR OF CHOICE

Our products reach the market through a network of sales teams and distributors in over 80 countries and have been installed in a huge variety of buildings on every continent across the world. This has given us important insights into product development and flexible customer service. Our head office is located in Bressanone and we have a local sales office in Milan dedicated to the Italian market. Our global markets are served by our international sales force and our warehouse in Bressanone ensures safe and fast deliveries.

Large quantities of our products reach the market in the shape of OEM products with the name of renowned quality brands or integrated into their range.

EXPERIENCED IN DELIVERIES

- Short delivery times
- Deliveries in time

As a leading global provider we understand the needs of many markets.

NORFIM OFFICE BUILDING LISBON, PORTUGAL. **TURCELL GEBZE OPERATION CENTER** GEBZE, TURKEY. **VOYAGER MERIT HOTEL-TRNC** CYPRUS. **PIXEL-34** TBILISI, GEORGIA. **HOSPITAL SAN CAMILLO LIDO DI VENEZIA**, ITALY. **AIRPORT LAMEZIA TERME** ITALY. **HOSPITAL CASCAIS** PORTUGAL. **FORTINA HOTEL** MALTA. **MERIT HOTEL** CYPRUS. **SAPPHIRE MALL AND RESIDENCE PROJECT** TURKEY. **MARMARA HOTEL** TURKEY. **HOSPITAL SAN MARTINO** GENOVA, ITALY. **SKOPJE AIRPORT** SKOPJE MACEDONIA. **BOLU HIGHWAY MALL** TURKEY. **RADISSON HOTEL** ISTANBUL, TURKEY. **PETITE ENFANCE** CAVAILLON, FRANCE. **SISLI KULTUR MERKEZI** SISLI, TURKEY. **RAMADA HOTEL IZMIT** IZMIT, TURKEY. **APHRODITE HOTEL** CYPRUS. **STATE HOSPITAL** TURKEY. **TRM EMERGENCY HOSPITAL** TURKEY. **HAWLER AIRPORT** NORTH IRAQ. **KAF HOSPITAL** TURKMENISTAN. **ENFIDHA AIRPORT** TUNISIA. **SHANGRI-LA'S MACTAN RESORT & SPA** PHILIPPINES. **ERBIL DIVAN HOTEL** IRAQ. **ASHGABAT EYE HOSPITAL** TURKMENISTAN. **AKU HOSPITAL** PAKISTAN PAKISTAN. **GALLERIA MALL** AMMAN, JORDAN. **CENTRAL BANK OF IRAQ** IRAQ. **BROUGHTON HOSPITAL** NORTH CAROLINA, USA.

Some of our reference projects world wide.

Divan Erbil Hotel
Erbil, IRAQ



Medina Airport
Medina, SAUDI ARABIA



Central Bank of Iraq
IRAQ



Baku Aquatic Centre
ASERBAIDSCHAN




Hotel Baia Azul
Madeira, PORTUGAL



Sapphire Shopping Center & Residence
Istanbul, TURKEY

1 Pre-programmed controllers

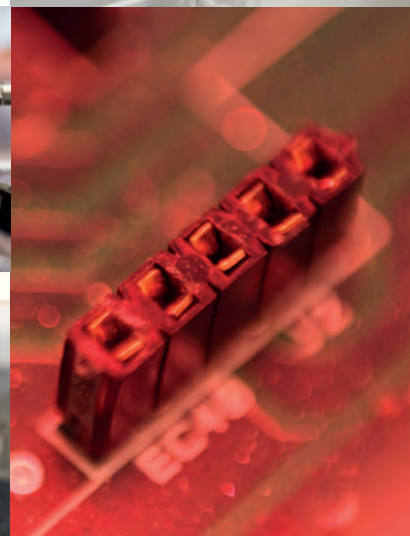

The result of continuous development

Evolution

Room Controller for fan-coil,
air handling and radiant panel
applications

QUICK FACTS

- Communication via RS485
- Quick and secure settings with the Evolution tool
- Easy installation
- On/Off control or 0...10 V
- Real-time clock



EVOLUTION TH

FOR FAN-COIL APPLICATIONS

Due to a large number of I/Os, the unit is fit for control of 3-speed or EC fans in 2-pipe, 2-pipe + electric heater, 4-pipe, 4-pipe and electric heater systems. Keycard input, window contact, CO₂ sensor and season change function.

EVOLUTION AHU

FOR AIR HANDLING UNIT APPLICATIONS

Due to a large number of I/Os, small air handling units and recuperators can be driven. The unit can be used for 2-pipe, 4-pipe systems, for on-off and EC fan control and for dampers. Direct power supply from the line. Humidity sensor on board.

EVOLUTION FH

FOR RADIANT PANEL APPLICATIONS

The available functions, including flow temperature control, dew point control, the presence of the relative humidity sensor on board, the management of dehumidification, possibility of using independent time slots by area and much more, make the FH series regulators the optimal choice for the management of heating and cooling systems with radiant panels.



EVOLUTION
TOOL

EVOLUTION, PRE-CONFIGURED CONTROLLER WITH DISPLAY, CLOCK AND COMMUNICATION

Controllers of the Evolution series are available in a wide range of functions for controlling heating, cooling and air-conditioning installations. The room controller Evolution TH is well-suited for thermoregulation applications.

Thanks to a large number of I/Os the unit is fit for control of 3-speed or EC fans in 2-pipe, 2-pipe + electric heater, 4-pipe, 4-pipe + electric heater systems. The outputs for valves can be on/off or modulating type. The large backlit display allows user to easily see temperatures, humidity, parameter settings, time bands and the state of the unit. The device is equipped with rapid access keys for the most common functions (fan speed control, season change, on/off etc.). The unit also features an RS485 line with Modbus slave RTU protocol or BACnet MS/TP for external communication and can be built-in wall mounted with a 3-module box. Depending on the model, controllers can have a communication feature, a clock, an on/off or proportional control, humidity sensor and a CO2 sensor input.



TH



Technical data	
Supply voltage	110...230 V AC $\pm$ 10%, 50...60 Hz
Inputs	2 digital contacts free of potential / 2 or 3 NTC10-02 sensors / USB port for parameters setting and software update
Outputs	3 analogue outputs 0...10 V ($R_L > 10$ kOhm) according to model / 5 relays SPST 230 V AC, 3A (AC1) according to model
Power consumption	Max. 1.3 W
Temperature range	0...50 °C
Storage temperature	-20...+70 °C
Display	LCD with backlight
Communication	Modbus RTU (slave) or BACnet MS/TP
Range of temperature reading	-15...+90 °C
Mounting	3 modules built-in box
Casing	PC + ABS - White effect RAL 9003
Weight	Max. 230 g
Dimensions	128 x 80 x 55.5 mm
Protection class	IP30
Isolation class	II
Certification	EN 60730-1/A16:2007, EN 61000-6-1:2007, EN 61000-6-3:2007 and EN 60730-2-9:2003. RoHS: This Product complies with the EU directive 2011/65/EU of the European Parliament

PRODUCT SELECTION

TH-	X	X	X	S	X	1
Version:						
1 digital output + 3 analogue outputs+ 3 analogue inputs	0					
2 digital output + 2 analogue outputs + 3 analogue inputs	1					
3 digital output + 1 analogue outputs + 3 analogue inputs	2					
3 digital output + 2 analogue outputs + 2 analogue inputs	3					
5 digital output + 0 analogue outputs + 3 analogue inputs	4					
Communication:						
Without communication				S		
Modbus				M		
Bacnet				B		
Clock:						
Without clock					S	
With clock					C	
Internal sensor:						
Temperature						T
Temperature + humidity						H
Connector:						
Plug-in connectors						

EVOLUTION SPLIT, ROOM CONTROLLER FOR CONTROLLING MULTIPLE FAN COILS VIA MASTER / SLAVE UNITS.

The Evolution Split THS equipment enables the control of up to 7 fan coils connected to a master unit. The master unit is mounted on the wall, while the slave units are mounted in the fan coils. The master unit allows you to set the operating parameters and display the status of the remote slave units via the internal network. Slave 1 supplies the power to the master unit and is also equipped with a second Modbus communication port that allows a supervision system to monitor the status of all equipment.

News!



THS



THS-0Mx

Technical data, master unit THS

Supply voltage	5 V DC Supplied by THS-0MM slave
Ambient temperature	0...50 °C
Display	Backlit
Inputs	2 potential free contacts / USB port for parameters setting and software update
Communication	internal network
Dimensions (WxHxD mm)	128 x 80 x 55.5
Mounting	Wall mounting
Protection class	IP30
Isolation class	II
Certification	EN 60730-1, EN61000-6-3, EN61000-6-1

Technical data, slave unit THS-0Mx

Supply voltage	110...230 V AC ± 10%, 50/60 Hz
Power consumption	Max, 1,1 W (3,5 VA) slave THS-0MM (with power supply for master unit)
Ambient temperature	0...50 °C
Inputs	2 potential free contacts / 2 NTC10K sensors / USB port for parameters setting and software update
Outputs	3 analogue outputs 0...10 V ($R_L > 10\text{ K}$) / 5 relays SPST 250 V AC, 3A (AC1) / 1 relay SPST 250 V AC, 10 A (AC1)
Communication	Modbus RTU (Slave) to BMS and internal network
Dimensions (WxHxD mm)	140 x 123 x 45
Mounting	On board fan coil
Protection class	IP30
Isolation class	II
Certification	EN 60730-1, EN 61000-6-3, EN 61000-6-1



Coming soon

PRODUCT SELECTION

Room controller:

THS

Version:

6 digital outputs + 3 analog outputs + 2 analog inputs + 2 digital inputs

Internal network communication

Communication to BMS:

Without bus

Modbus

O	M	X
0	M	
		S
		M

EVOLUTION, ROOM CONTROLLER FOR AIR HANDLING UNITS

Room controller for air handling units, equipped with rapid access buttons for the most common functions. The wide availability of inputs and outputs makes it ideal for various types of systems: supply air temperature control, the supply air temperature control with outside temperature compensation, shooting or ambient air temperature control with supply limitations, monitoring of ambient air temperature using cascade control (control with flow sensor), monitoring air quality, dehumidification, free cooling, free heating, heat recovery. The outputs can be on / off or modulating. The large backlit display is easily readable and allows to read the measured values of humidity and temperature, control parameters, time slots of operation and the status of the device. It has also a RS485 communication line with Modbus RTU slave protocol, designed for installation on the wall of the box 3 modules. Depending on the model, the regulators may have a communication function, clock, on / off or proportional control, humidity sensor and a CO2 sensor input.



AHU



Technical data	
Supply voltage	110...230 V AC $\pm$ 10%, 50...60 Hz
Inputs	2 potential free contacts / 2 or 3 NTC10-02 sensors / USB port for parameters setting and software update
Outputs	3 analogue outputs 0...10 V ($R_L > 10$ kOhm) according to model / 5 relays SPST 230 V AC, 3A (AC1) according to model
Power consumption	Max. 1.3 W
Storage temperature	-20...+70 °C
Temperature range	0...50 °C
Ambient humidity	10...90 % RH (non-condensing)
Display	LCD with backlight
Communication	Modbus RTU (slave)
Range of temperature reading	-15...+90 °C
Mounting	3 modules built-in box
Casing	PC + ABS - White effect RAL 9003
Weight	Max. 230 g
Dimensions	128 x 80 x 55,5 mm
Protection class	IP30
Isolation class	II
Certification	EN 60730-1/A16:2007, EN 61000-6-1:2007, EN 61000-6-3:2007 and EN 60730-2-9:2003. RoHS: This Product complies with the EU directive 2011/65/EU of the European Parliament

PRODUCT SELECTION

AHU	X	X	X	S	X	1
Version:						
1 digital output + 3 analogue outputs+ 3 analogue inputs	0					
2 digital output + 2 analogue outputs + 3 analogue inputs	1					
3 digital output + 1 analogue outputs + 3 analogue inputs	2					
3 digital output + 2 analogue outputs + 2 analogue inputs	3					
5 digital output + 0 analogue outputs + 3 analogue inputs	4					
Communication:						
Without communication		S				
Modbus		M				
Clock:						
Without clock			S			
With clock			C			
Internal sensor:						
Temperature					T	
Temperature + humidity					H	
Connector:						
Plug-in connectors						

EVOLUTION, ROOM CONTROLLER FOR RADIANT PANEL APPLICATIONS

Room regulator for regulation and control applications of radiant panel systems. The available functions, including flow temperature control, dew point control, the presence of the relative humidity sensor on board, the management of dehumidification, possibility of using independent time slots by area and much more, make the FH series regulators the optimal choice for the management of heating and cooling systems with radiant panels. The controllers have a Modbus communication port for control in master / slave systems or for interfacing with supervisory systems. The configuration of the products can be done via Modbus port or through a USB port, using the special Evolution Tool configuration software.



FH



Technical data	
Supply voltage	110...230 V AC $\pm$ 10%, 50...60 Hz
Power consumption	Max. 1.3 W
Temperature range	0...50 °C
Inputs	2 potential free contacts / 2 or 3 NTC10K sensors / USB port for parameters setting and software update
Outputs	1 analogue outputs 0...10 V ($R_L > 10 \text{ k}\Omega$) according to model / 3 or 5 relays SPST 250 V AC, 3A (AC1) according to model
Communication	Modbus RTU (master or slave)
Range of temperature reading	-15...+90 °C
Ambient humidity	10...90 % RH (non-condensing)
Dimensions	128 x 80 x 55.5 mm
Mounting	3 modules built-in box
Storage temperature	-20...+70 °C
Casing	PC + ABS - White effect RAL 9003
Weight	Max. 230 g
Protection class	IP30
Isolation class	II
Certification	EN 60730-1, EN 61000-6-1, EN 61000-6-3

PRODUCT SELECTION

Room controller:

FH

Version:

3 digital outputs + 1 analog output + 3 analog inputs	2
5 digital outputs + 0 analog outputs + 3 analog inputs	4

Communication:


Modbus	M
--------	---

Clock:

Without clock	S
With clock	

Internal sensor:

Temperature + humidity	H
------------------------	---

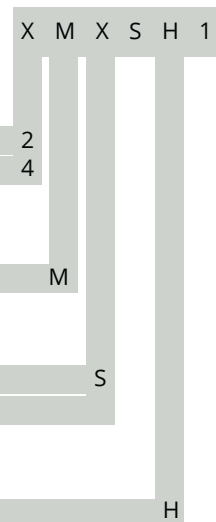

ROOM TEMPERATURE, HUMIDITY, CO2 AND UNIVERSAL CONTROLLER 110...240 V AC

Stand-alone room controller for temperature, humidity, CO2 and universal.

Technical data	
Supply voltage	110...240 V AC, 50...60 Hz
Input	1 analogue input 0...10 V (only for model PC-U)
Output	1 analogue output 0...10 V ($R_L > 10 \text{ k}\Omega$)
Ambient temperature	0...50 °C
Ambient humidity	10...90 % RH (non-condensing)
Working range, temperature	0...50 °C
Working range, humidity	0...100 % RH
Working range, CO ₂	0...2000 ppm
Protection class	IP30 class II
Dimensions	PC-H, PC-U: 85 x 100 x 30.5 mm PC-T, PC-TC: 88 x 100 x 30.5 mm

Article	Description	Power consumption
PC-H	Room humidity controller	Max. 0.46 W
PC-T	Room temperature controller	Max. 0.46 W
PC-TC	Room temperature and CO2 controller	Max. 1.25 W
PC-U	Universal room controller	Max. 0.46 W



PC-H, PC-U



PC-T, PC-TC

ROOM TEMPERATURE CONTROLLER FOR 0...10 V DC OR 3-POINT ACTUATORS

This room controller is primarily intended for control of heating or cooling in zone control systems. It has an input for a presence detector (occupancy control). The controller also has an input for change-over, which makes it possible for the control function to switch between heating and cooling.

Technical data	
Supply voltage	24 V AC, $\pm 15\%$ 50...60 Hz, 2 VA
Output	0...10 V DC, 1 mA or 3-point, 24 V AC, 1 A
Inputs	Two digital and one NTC sensor
Setpoint	0...40 °C
P-band	0.5...50 K
Dimensions	102 x 120 x 29 mm
Protection class	IP20

Article	Description
CA1	Room temperature controller



CA1

ELECTRONIC ROOM THERMOSTAT, 1-STAGE

Electronic thermostats intended for heating or cooling with built-in sensor and input for an external sensor.



TAE1 TAE2

Technical data	
Supply voltage	230 V AC $\pm 15\%$, 1 VA
Outputs	16 A, 230 V AC, change-over relay
Ambient temperature	0...50 °C
Sensor inputs	NTC sensor
Mounting	Wall
Dimensions	86 x 86 x 30 mm
Protection class	IP30

Article	Temperature range	Hysteresis
TAE1	0...30 °C	1 K
TAE2	20...50 °C	1...10 K

DB-TA ROOM CONTROLLERS WITHOUT DISPLAY

RANGE +5...+30°C DB-TA-		PIPE	OUTPUTS		SWITCHES			REMOTE S/W	REMOTE SENSOR	POWER SUPPLY
			RELAY	0... 10 VCC	ON/OFF	3-SPEED	S/W			
323-	435	2	•		s	•		•	A	24/230 V AC
335-	993	2/4		•/••			•/zn		B	24 V AC
343-	139	4	••		•	•	zn		B	24/230 V AC
345-	139	4		••	•	•	zn		B	24 V AC
	199	4		••	•		zn			
	999	4		••			zn			
363-	436	2	•		s	•	auto		A	230 V AC
383-	433	2/4	•		s	•	•		A	24/230 V AC
387-	866	2	••••			m/a	auto		A	230 V AC

INDEX FOR MODELS DB-TA-3:

- zn** dead zone
- s** continuous fan/thermostatic fan/off switch
- auto** s/w change over with water sensor
-  on/off/electric heater switch
min speed/automatic speed switch
- m/a** min speed/automatic speed switch
- A** sensor NT0220-NTC10-02
- B** sensor NT0220-NTC100

ROOM THERMOSTATS FOR 2 PIPE SYSTEM

Technical data	
Supply voltage	24/230 V AC ± 10 %, 50/60 Hz (selectable by jumper)
Load	Max. 6 A
Output	1 SPDT relay 6 A 24/230 V AC
Power consumption	1 W
Sensor	Thermoresistor NTC 100K (for DB-TA-323-435 -> NTC 10K)
Ambient temperature	0...40 °C
Ambient humidity	10...90 % RH (non-condensing)
Setpoint	5...30 °C (mechanical limitation of the setpoint adjustment)
Hysteresis	0.5 K
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Casing	ABS fireproof according to UL94 V-0 color (RAL 9010)
Weight	210 g
Dimensions	144 x 82 x 27 mm
Protection class	IP30
Isolation class	II



DB-TA-323-435

Article	On/off button	3 speeds	Change-over function, season	Sensor
DB-TA-323-435	X	X	Remote	NTA020-027P optional with 2 m cable, selectable by jumper



For DB-TA-323-435 switch off/fan based on temp./continuous fan.

ROOM CONTROLLERS FOR 2 OR 4 PIPE SYSTEM, 0...10 V OUTPUT



DB-TA-335-933

Technical data	
Supply voltage	24 V AC $\pm$ 10 %, 50/60 Hz
Load	Max. 6 A (speeds)
Output	Proportional 0...10 V DC ($R_L > 10 \text{ k}\Omega$)
Power consumption	1 W
Sensor	NTC 100K
Ambient temperature	0...40 °C
Ambient humidity	10...90 % RH (non-condensing)
Setpoint	5...30 °C (mechanical limitation of the setpoint adjustment)
Hysteresis	0.5 K
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
P-band	1...5 K
Neutral zone	1...4 K
Casing	ABS fireproof according to UL94 V-0 color (RAL 9010)
Weight	210 g
Dimensions	144 x 82 x 34 mm mm
Protection class	IP30
Isolation class	II

Article	3 speeds	Change-over function, season	Sensor
DB-TA-335-933	-	Local S/W (4-pipe) neutral zone	NT0220-NTC100 optional with 2 m cable, selectable by jumper

ROOM CONTROLLERS FOR 4 PIPE SYSTEM



DB-TA-343-139

Technical data	
Supply voltage	24/230 V AC $\pm$ 10 %, 50/60 Hz (selectable by jumper)
Load	Max. 6 A (resistivi)
Outputs	2 SPDT relays 6 A 24/230 V AC
Power consumption	1 W
Sensor	NTC 100K
Ambient temperature	0...40 °C
Ambient humidity	10...90 % RH (non-condensing)
Setpoint	+5...+30 °C mechanical limitation of the setpoint adjustment
Hysteresis	0.5 K
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Neutral zone	1...4 K
Casing	ABS fireproof according to UL94 V-0 color (RAL 9010)
Weight	210 g
Dimensions	144 x 82 x 34 mm
Protection class	IP30 class II
Isolation class	II

Article	On/off button	3 speeds	Change-over function, season	Sensor
DB-TA-343-139	X	X	Local S/W (neutral zone)	NT0220-NTC100 optional with 2 m cable, selectable by jumper

ROOM CONTROLLERS FOR 4 PIPE SYSTEM, 0...10 V OUTPUTS

Technical data	
Supply voltage	24 V AC $\pm$ 10%, 50/60 Hz
Load	Max. 6 A (speed)
Outputs	2 proportional 0...10 V DC ($R_L > 10 \text{ k}\Omega$)
Power consumption	1 W
Sensor	NTC 100K
Ambient temperature	0...40 °C
Ambient humidity	10...90 % RH (non-condensing)
Setpoint	5...30 °C mechanical limitation of the setpoint adjustment
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
P-band	1...5 K
Neutral zone	1...4 K
Casing	ABS fireproof according to UL94 V-0 color (RAL 9010)
Weight	210 g
Dimensions	144 x 82 x 34 mm
Protection class	IP30 class II
Isolation class	II



DB-TA-345-139



DB-TA-345-199



DB-TA-345-999

Article	On/off button	3 speeds	Change-over function, season	Sensor
DB-TA-345-139	X	X	Local S/W (neutral zone)	NT0220-NTC100 optional with 2 m cable, selectable by jumper
DB-TA-345-199	X	-	Local S/W (neutral zone)	NT0220-NTC100 optional with 2 m cable, selectable by jumper
DB-TA-345-999	-	-	Local S/W (neutral zone)	NT0220-NTC100 optional with 2 m cable, selectable by jumper

ROOM THERMOSTATS FOR 2 PIPE SYSTEM WITH AUTOMATIC SEASON CHANGEOVER

Technical data	
Supply voltage	230 V AC $\pm$ 10%, 50/60 Hz
Load	Max. 6 A (resistive)
Output	1 relay 6 A 230 V AC
Power consumption	1 W
Sensor	NTC 10K air sensor and water sensor
Ambient temperature	0...40 °C
Ambient humidity	10...90 % RH (non-condensing)
Setpoint	5...30 °C (mechanical limitation of the setpoint adjustment)
Hysteresis	< 0.5 K
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Casing	ABS fireproof according to UL94 V-0 color (RAL 9010)
Weight	210 g
Dimensions	144 x 82 x 34 mm
Protection class	IP30 class II
Isolation class	II



DB-TA-363-436

Article	Manual selection of thermostatic fan/continuous fan/Off	3 speeds	Change-over function, season	Sensor
DB-TA-363-436	X	X	Local S/W auto (season changeover selection, S/W, by water sensor)	NT0220-NTC10-02 optional with 2 m cable, selectable by jumper



The thermostats are supplied with water sensor model NTA020-027P

ROOM THERMOSTATS FOR 2 OR 4 PIPE SYSTEM

Technical data	
Supply voltage	24/230 V AC $\pm 10\%$, 50/60 Hz (selectable by jumper)
Load	Max. 6 A
Output	1 relay SPDT 6 A 230 V AC
Power consumption	1 W
Sensor	NTC 10K
Ambient temperature	0...40 °C
Ambient humidity	10...90 % RH (non-condensing)
Setpoint	5...30 °C (mechanical limitation of the setpoint adjustment)
Hysteresis	0.5 K
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Casing	ABS fireproof according to UL94 V-0 color (RAL 9010)
Weight	210 g
Dimensions	144 x 82 x 34 mm
Protection class	IP30 class II
Isolation class	II



DB-TA-383-433

Article	Manual selection of thermostatic fan/continuous fan/Off	3 speeds	Change-over function, season	Sensor
DB-TA-383-433	X	X	Local S/W	NTA020-027P optional with 2 m cable, selectable by jumper



The controllers are supplied with water sensor model NTA020-027P.

ROOM CONTROLLERS FOR 2 OR 4 PIPE SYSTEM WITH AUTOMATIC MOTOR SPEED AND SEASON CHANGEOVER

Technical data	
Supply voltage	230 V AC $\pm 10\%$, 50/60 Hz
Load	Max. 6 A for motor output, valves or electric heater relay
Outputs	8 relays 6 A 230 V AC
Power consumption	1 W
Sensor	NTC 10K air sensor and water sensor
Ambient temperature	0...40 °C
Ambient humidity	10...90 % RH (non-condensing)
Setpoint	Summer: +24 $\pm$ 5 °C / winter: +20 $\pm$ 5 °C (mechanical limitation of the setpoint adjustment)
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Hysteresis	0.5 K
Casing	ABS fireproof according to UL94 V-0 color (RAL 9010)
Weight	210 g
Dimensions	144 x 82 x 34 mm
Protection class	IP30 class II
Isolation class	II



DB-TA-387-866

Article	Pipes	On/off/ electric heating button	Auto/ silence	Change-over function, season	3 speeds	Sensor
DB-TA-387-866		X	X	W/S (working season, W/S, selection by water sensor)	Auto	NTA020-027P optional with 2 m cable, selectable by jumper



The controllers are supplied with water sensor model NTA020-027P.

DB-TA ROOM CONTROLLERS WITH DISPLAY

RANGE +5...+30°C DB-TA-		PIPE	OUTPUTS		SWITCHES			REMOTE S/W	ECONOMY	REMOTE SENSOR	POWER SUPPLY
			RELAY	0... 10 VCC	ON/OFF	3-SPEED	S/W				
33A-	10A	2/4		q	•		par	•	v	A	24 V AC
	13A	2/4		q	•	•	par	•	v		
393-	435	2/4	•		s	•	•			A	230 V AC
3A5-	000	4		••			zn		v	-	24 V AC
3C3-	13A	2	••		•	•	par		v	A	230 V AC
	19A	2	••		•		par		v		
	99A	2	••				par		v		

INDEX FOR MODELS DB-TA-3:

zn	dead zone
q	proportional-integral action
s	continuous fan/thermostatic fan/ off switchw
par	setting by keys and display
A	sensor NT0220-NTC10-02
v	ECONOMY version: replace last number of code with "A"

ROOM CONTROLLERS FOR 2 AND 4 PIPE SYSTEM WITH ECONOMY FUNCTION, WITH 0...10 V OUTPUT(S)

Proportional integral temperature control in heating, ventilation, refrigeration and air conditioning for typically 2- and 4-pipe fan-coil systems with proportional valves.

Technical data

Supply voltage	24 V AC ± 10%, 50/60 Hz
Inputs	External contact for economy / external contact or water sensor (NTA020-027P optional) for remote season changeover function (2-pipe)
Outputs	Valves: 1 or 2 0-10 V outputs ($R_L > 10 \text{ k}\Omega$) / speeds: 6 A 24/230 V AC, 50/60 Hz
Power consumption	1 W
Sensor	NTC 10K
Ambient temperature	0...45 °C
Ambient humidity	10...90 % RH (non-condensing)
Setpoint	6...45 °C
Storage temperature	-20...+60 °C
Storage humidity	< 95 % RH
Economy	2 pipes: adjustable range between 6...45 °C (replaced the working setpoint) / 4 pipes: adjustable range between 0...5 °C
P-band	1...30 K
I-time	1...30 minutes
Temperature resolution	0.1 °C
Casing	ABS fireproof according to UL94 V-0 color (RAL 9010)
Weight	220 g
Dimensions	144 x 82 x 34 mm
Protection class	IP30
Isolation class	II

Article	On/off button	3 speeds	Change-over function, season	Sensor
DB-TA-33A-10A	X	-	S / W setting by keys and display	NT0220-NTC10-02 optional with 2 m cable, selectable by jumper
DB-TA-33A-13A	X	X	S / W setting by keys and display	NT0220-NTC10-02 optional with 2 m cable, selectable by jumper



DB-TA-33A-10A



DB-TA-33A-13A



Optional water sensor model NTA020-027P.

ROOM THERMOSTATS FOR 2 OR 4 PIPE SYSTEM



DB-TA-393-435

Technical data	
Supply voltage	230 V AC $\pm$ 10%, 50/60 Hz
Load	Max. 6 A
Inputs	External contact or water sensor for remote season changeover function (DB-TA-393-436)
Outputs	1 relay SPDT 6 A 230 V AC
Power consumption	1 W
Sensor	NTC 10K
Ambient temperature	0...40 °C
Ambient humidity	10...90 % RH (non-condensing)
Setpoint	5...30 °C adjustment by step of 0.5 °C
Hysteresis	0.5 K
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Casing	ABS fireproof according to UL94 V-0 color (RAL 9010)
Weight	220 g
Dimensions	144 x 82 x 34 mm
Protection class	IP30
Isolation class	II

Article	Manual selection of thermostatic fan/continuous fan/Off	3 speeds	Change-over function, season	Sensor
DB-TA-393-435	X	X	S / W	NTA020-027P optional with 2 m cable, selectable by jumper

 Optional water sensor model NTA020-027P.

ROOM CONTROLLERS FOR 4 PIPE SYSTEM, TWO 0-10 V OUTPUTS



DB-TA-3A5-000

Technical data	
Supply voltage	24 V AC $\pm$ 10%, 50/60 Hz
Outputs	Valves: 2 0-10 V outputs ($R_L > 10 \text{ k}\Omega$) / speeds: 6 A 24/230 V AC, 50/60 Hz
Power consumption	1 W
Sensor	NTC 10K
Ambient temperature	0...40 °C
Ambient humidity	10...90 % RH (non-condensing)
Setpoint	5...30 °C
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
P-band	1...5 K
Neutral zone	1...4 K
Temperature resolution	0.1 °C
Casing	ABS fireproof according to UL94 V-0 color (RAL 9010)
Weight	220 g
Dimensions	144 x 82 x 34 mm
Protection class	IP30
Isolation class	II

Article	On/off button	3 speeds	Change-over function, season
DB-TA-3A5-000	-	-	Neutral zone

ROOM THERMOSTATS 2 STAGES WITH ECONOMY FUNCTION

Temperature control in heating, refrigeration and air conditioning for typical fan-coil systems with 2 stages.

Technical data	
Supply voltage	230 V AC $\pm$ 10%, 50/60 Hz
Input	External contact for economy function
Outputs	Valves: 2 relay SPDT 6 A 230 V AC / speeds: 6 A 24/230 V AC, 50/60 Hz
Power consumption	1 W
Sensor	NTC 10K
Ambient temperature	0...40 °C
Ambient humidity	10...90 % RH (non-condensing)
Setpoint	5...30 °C
Step differential	0.5...4 K
Hysteresis	0.5...4 K
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Economy	Adjustable range between 0...5 °C
Temperature resolution	0.1 °C
Casing	ABS fireproof according to UL94 V-0 color (RAL 9010)
Weight	220 g
Dimensions	144 x 82 x 34 mm
Protection class	IP30 class II
Isolation class	II

Article	On/off button	3 speeds	Hysteresis	Sensor
DB-TA-3C3-13A	X	X	0.5...4 K	NTA020-027P optional with 2 m cable, selectable by jumper
DB-TA-3C3-19A	X	-	0.5...4 K	NTA020-027P optional with 2 m cable, selectable by jumper
DB-TA-3C3-99A	-	-	0.5...4 K	NTA020-027P optional with 2 m cable, selectable by jumper



DB-TA-3C3-13A




DB-TA-3C3-19A



DB-TA-3C3-99A

2 Electronic thermostats

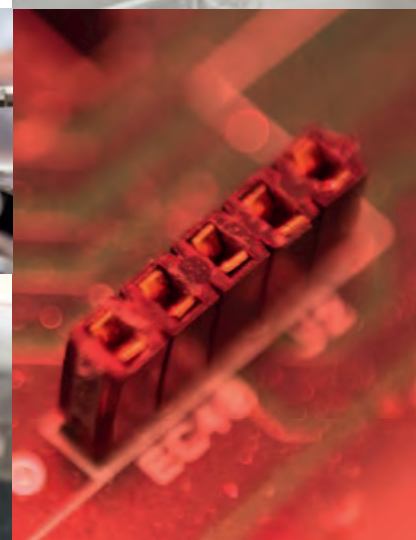

DIGITAL CONTROLLERS, 4 STAGES WITH RELAY

Temperature and humidity control in heating, cooling, humidification and dehumidification systems.



DB-I4D/02/001

Technical data	
Supply voltage	230 V AC +/- 10%, 50-60 Hz
Input	- NTC 10K sensor and/or humidity-current transmitter 4...20 mA- remote setpoint controller DB-CDP-N1 (optional)
Output	4 or 8 SPDT relays 10 A 230 V AC
Ambient temperature	-10...+50 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Delay	0...9.5 min
Display	2 lines with 3 digits (7 segments display)
Configuration	4 push/buttons keyboard on the front
Casing	Makrolon
Weight	920 g
Dimensions	200 x 120 x 75 mm (DB-I4D/02/004: 2 casings 200 x 120 x 75 mm)
Protection class	IP65
Isolation class	II

Article	Power consumption	Number of modules	Steps	Range	Hysteresis	Input
DB-I4D/02/001	< 3 W	1	4	-50...+110 °C	0...10 K	NTC 10K
DB-I4D/02/002	< 3 W	1	4	0...100 % RH	0...100 % RH	4...20 mA
DB-I4D/02/003	< 3 W	1	4	-50...+110 °C / 0...100 % RH	0...10 K / 0...10 % RH	NTC 10K / 4...20 mA
DB-I4D/02/004	< 6 W	2	8	-50...+110 °C	0...10 K	NTC 10K

DIGITAL THERMOSTAT ONE STAGE

Indication and controlling of temperature with NTC sensors in industrial heating and cooling applications.

Technical data	
Supply voltage	230 V AC, 50/60 Hz
Input	1 NTC sensor
Output	1 SPDT relay 10 A, 230 V AC resistive load
Sensor	NTC10-02
Power consumption	1,8 W / 2,5 VA
Setpoint	-40...+105 °C
Ambient temperature	0...55 °C
Ambient humidity	10...90% RH (non-condensing)
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Hysteresis	0,1...99 K
Resolution	0,1 °C / 1 °C / 0,1 °F
Casing	Fire-proof
Connection	Screw terminal blocks
Installation	Panel mounting, with click brackets
Dimensions	75 x 33 x 65 mm - mounting hole 71 x 29 mm
Protection class	IP65 (frontal)

Article	Setpoint	Hysteresis
DTR11N7	-40...+105 °C	0,1...99 K



DTR11N7

DIGITAL CONTROLLERS WITH RELAYS

Control of 1 or 2 independent physical quantities with:

- 2 relay outputs;
- 1 output for power supply of active transducer (17 V DC, max. 44 mA);
- 3 digit display;
- red LED, output state indicator;
- push buttons for parameters setting;
- optical alarms;
- password and two access levels.



DB-R/1

Technical data DB-R/1

Outputs	2 SPDT relays 8 A 230 V AC
Power consumption	< 3 W
Ambient temperature	0...45 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Connection	Screw terminal block for cables up to 2.5 mm ²
Casing	ABS fireproof plastic according to UL94 V-0
Weight	400 g
Dimensions	96 x 48 x 122 mm - mounting hole: 92 x 45 mm
Protection class	IP52 (front)
Isolation class	II

DB-R/1

Part number selection	Input 1			Input 2				
DB-R	X	X	XX	X	X	XX	X	1
INPUT 1								
NTC10-02	1	1	07 ⁽¹⁾					
PT1000	2	1	08 ⁽¹⁾					
PTC 2K	3	1	09 ⁽¹⁾					
NI1000-02	4	1	10 ⁽¹⁾					
0...1000 Ohm	5	2	06 ⁽¹⁾					
0...1 Vcc (**)	6							
0...10 Vcc (**)	7							
0...20 mA (**) (Rin = 100 Ohm)	8							
4...20 mA (**) (Rin = 100 Ohm)	9							
UNIT 1								
°C		1						
% u.r.		2						
bar		3						
mbar		4						
Pa		5						
RANGE 1								
0...+50°C			01					
-30...+50°C			02					
-10...+40°C			03					
0...+100°C			04					
-20...+80°C			05					
0...+100% u.r.			06					
-50...+110°C			07					
-60...+600°C			08					
-50...+150°C			09					
-60...+200°C			10					
Range on request (*)			99					
INPUT 2								
None				0	0	00		
NTC10-02				1	1	07 ⁽¹⁾		
PT1000				2	1	08 ⁽¹⁾		
PTC 2K				3	1	09 ⁽¹⁾		
NI1000-02				4	1	10 ⁽¹⁾		
0...1000 Ohm				5	2	06 ⁽¹⁾		
0...1 Vcc (**)				6				
0...10 Vcc (**)				7				
0...20 mA (**) (Rin = 100 Ohm)				8				
4...20 mA (**) (Rin = 100 Ohm)				9				
UNIT 2								
None					0			
°C					1			
% u.r.					2			
bar					3			
mbar					4			
Pa					5			
RANGE 2								
None						00		
0...+50°C						01		
-30...+50°C						02		
-10...+40°C						03		
0...+100°C						04		
-20...+80°C						05		
0...+100% u.r.						06		
-50...+110°C						07		
-60...+600°C						08		
-50...+150°C						09		
-60...+200°C						10		
range on request (*)						99		
POWER SUPPLY								
230 Vca ±10% 50/60 Hz							1	
12 Vca ±10% 50/60 Hz							2	
OUTPUT								
2 relè SPDT 230Vca 8A								

(*) specify on order
 (1) compulsory ranges
 (**) the choice of the setting range is only permitted for models with voltage inputs (VDC) or current (mA)

DIGITAL CONTROLLERS 2 OUTPUTS 0...10 V

Regulation of 1 or 2 independent physical quantities with:

- 2 proportional outputs 0...10 V DC;
- 1 output for power supply of active transducer (17 V DC, Max. 44 mA);
- 3 digit display;
- red led, output state indicator;
- push buttons for parameters setting;
- optical alarms;
- password and two access levels.



DB-R/2

Technical data DB-R/2

Outputs	2 0-10 V ($R_L > 10 \text{ k}\Omega$)
Power consumption	< 3 W
Ambient temperature	0...45 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Connection	Screw terminal block for cables up to 2.5 mm ²
Casing	ABS fireproof plastic according to UL94 V-0
Weight	400 g
Dimensions	96 x 48 x 122 mm - mounting hole: 92 x 45 mm
Protection class	IP52 (front)
Isolation class	II

DB-R/2

Part number selection								
DB-R	X	Input 1 X	XX	X	Input 2 X	XX	X	2
INPUT 1								
NTC10-02	1	1	07 ⁽¹⁾					
0...10 Vcc (**)	7							
4...20 mA (**) (Rin = 100 Ohm)	9							
UNIT 1								
°C		1						
% u.r.		2						
bar		3						
mbar		4						
Pa		5						
RANGE 1								
0...+50°C			01					
-30...+50°C			02					
-10...+40°C			03					
0...+100°C			04					
-20...+80°C			05					
0...+100% u.r.			06					
-50...+110°C			07					
-60...+600°C			08					
-50...+150°C			09					
-60...+200°C			10					
range on request (*)			99					
INPUT 2								
None				0	0	00		
NTC10-02				1	1	07 ⁽¹⁾		
0...10 Vcc (**) (Rin = 100 Ohm)				7				
4...20 mA (**) (Rin = 100 Ohm)				9				
UNIT 2								
None					0			
°C					1			
% u.r.					2			
bar					3			
mbar					4			
Pa					5			
RANGE 2								
None						00		
0...+50°C						01		
-30...+50°C						02		
-10...+40°C						03		
0...+100°C						04		
-20...+80°C						05		
0...+100% u.r.						06		
-50...+110°C						07		
-60...+600°C						08		
-50...+150°C						09		
-60...+200°C						10		
range on request (*)						99		
POWER SUPPLY								
230 Vca ±10% 50/60 Hz							1	
12 Vca ±10% 50/60 Hz							2	
OUTPUT								
2 0-10 V								

(*) specify on order
 (¹) compulsory ranges
 (**) the choice of the setting range is only permitted for models with voltage inputs (VDC) or current (

DIGITAL CONTROLLERS WITH 1 OUTPUT 0...10 V AND 1 RELAY OUTPUT

Regulation of 1 or 2 independent physical quantities with:

- 1 proportional output 0...10 V DC;
- 1 relay output;
- 1 output for power supply of active transducer (17 V DC, Max. 44 mA)
- 3 digit display;
- red led, output state indicator;
- push buttons for parameters setting;
- optical alarms;
- password and two access levels.



DB-R/3



Technical data DB-R/3

Outputs	1 proportional 0...10 V DC ($R_L > 10 \text{ k}\Omega$) / 1 SPDT relay 8 A 230 V AC
Power consumption	< 3 W
Ambient temperature	0...45 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Connection	Screw terminal block for cables up to 2.5 mm ²
Casing	ABS fireproof plastic according to UL94 V-0
Weight	400 g
Dimensions	96 x 48 x 122 mm - mounting hole: 92 x 45 mm
Protection class	IP52 (front)
Isolation class	II

DB-R/3

Part number selection		Input 1		Input 2					
DB-R	X	X	XX	X	X	XX	X	1	
INPUT 1									
NTC10-02	1	1	07 ⁽¹⁾						
0...10 Vcc (**)	7								
4...20 mA (**) (Rin = 100 Ohm)	9								
UNIT 1									
°C		1							
% u.r.		2							
bar		3							
mbar		4							
Pa		5							
RANGE 1									
0...+50°C			01						
-30...+50°C			02						
-10...+40°C			03						
0...+100°C			04						
-20...+80°C			05						
0...+100% u.r.			06						
-50...+110°C			07						
-60...+600°C			08						
-50...+150°C			09						
-60...+200°C			10						
range on request (*)			99						
INPUT 2									
None				0	0	00			
NTC10-02				1	1	07 ⁽¹⁾			
PT1000				2	1	08 ⁽¹⁾			
PTC 2K				3	1	09 ⁽¹⁾			
NI1000-02				4	1	10 ⁽¹⁾			
0...1000 Ohm				5	2	06 ⁽¹⁾			
0...1 Vcc (**)				6					
0...10 Vcc (**)				7					
0...20 mA (**)				8					
4...20 mA (**)				9					
UNIT 2									
None					0				
°C					1				
% u.r.					2				
bar					3				
mbar					4				
Pa					5				
RANGE 2									
None						00			
0...+50°C						01			
-30...+50°C						02			
-10...+40°C						03			
0...+100°C						04			
-20...+80°C						05			
0...+100% u.r.						06			
-50...+110°C						07			
-60...+600°C						08			
-50...+150°C						09			
-60...+200°C						10			
range on request (*)						99			
POWER SUPPLY									
230 Vca ±10% 50/60 Hz								1	
12 Vca ±10% 50/60 Hz								2	
OUTPUT									
1 0-10 V e 1 relè SPDT 230 Vca 8 A									

3 Electromechanical thermostats

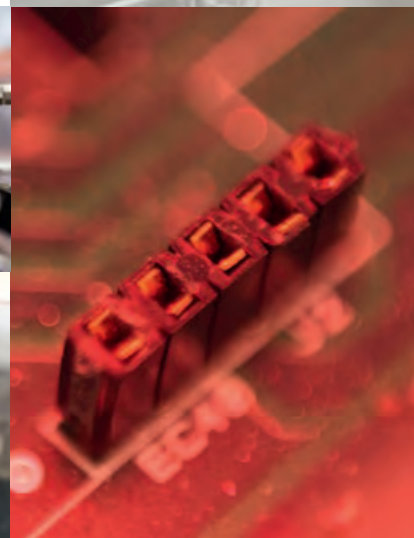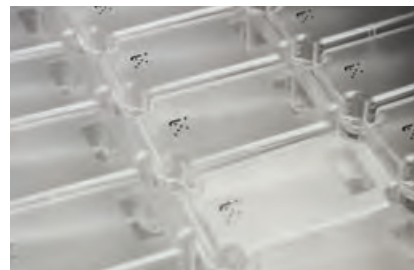

ROOM THERMOSTAT

1-stage room thermostat. Models with on/off switch or summer/winter switch.



TA33/I

Technical data	
Sensor element	Gas-filled bellows with membrane
Hysteresis	1 K
Contact	NO/NC 250 V AC 16 (2,5) A
Temperature range	5...30 °C
Ambient temperature	Max. 50 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	0...50 °C
Storage humidity	< 95 % RH
Mounting	Room
Casing	ABS, fireproof according UL94 V-0 color (Euro White)
Dimensions	80 x 80 x 44 mm
Weight	128 g
Protection class	IP20
Isolation class	I

Article	On/off button	Summer/winter switch	Hysteresis
TA31/I	-	-	1K
TA33/I	X	-	1K
TA34/I	-	X	1K

ACCESSORIES

Article	Description
000071	Pin for knob lock - 2 pcs. per device

ROOM THERMOSTATS WITH FIXED HYSTERESIS, IP54

A wide range of low cost room thermostats for wall mounting.



ET060U



ET06060U

Technical data	
Sensor element	Liquid-filled coiled copper nickel bulb
Contacts	Microswitches with switching SPDT contacts (heat/cool)
Switch capacity	NC 16 (6) A, 250 V AC / NO 6 (4) A, 250 V AC
Temperature range	°C
Ambient temperature	-10...+65 °C
Ambient humidity	10...90% RH (without condensing)
Storage temperature	-20...+65 °C
Storage humidity	< 95 % RH
Max. bulb temperature	65 °C
Casing	Bayblend® base, ABS cover
Weight	1 stage: 1340 g 2 stage: 2520 g
Protection class	IP54
Isolation class	I
Dimensions	108 x 70 x 72 mm (132 x 88 x 70 mm for 2 stage models)

Article	Temperature range 1	Temperature range 2	Hysteresis 1	Hysteresis 2	Hidden setpoint
ET060	0...+60 °C		1.5±1 K		-
ET060U	0...+60 °C		1.5±1 K		X
ET06060	0...+60 °C	0...+60 °C	1.5±1 K	1.5±1 K	-
ET06060U	0...+60 °C	0...+60 °C	1.5±1 K	1.5±1 K	X

 Note: range 2 always under the cover, range 1 under the cover

WALL THERMOSTAT, IP65

High quality thermostats for use in cooling, heating and ventilation systems.

Technical data	
Sensor element	Liquid-filled coiled copper bulb
Contacts	Microswitches with SPDT contacts (heat/cool)
Switch capacity	15 (8) A, 24...250 V AC
Ambient temperature	-35...+60 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-40...+65 °C
Storage humidity	< 95 % RH
Max. bulb temperature	65 °C
Casing	Bayblend® base, ABS cover
Dimensions	108 x 70 x 72 mm
Weight	450 g
Protection class	IP65
Isolation class	I



DBET-26



DBET-26U

Article	Temperature range	Steps	Hysteresis	Step diff.	Hidden setpoint
DBET-22	-30...+30 °C	1	2...15 K	-	-
DBET-22U	-30...+30 °C	1	2...15 K	-	X
DBET-23	-30...+30 °C	1	1 K	-	-
DBET-22/2	-30...+30 °C	2	1 K	2...5 K	-
DBET-26	0...60 °C	1	2...15 K	-	-
DBET-27	0...60 °C	1	1 K	-	-
DBET-26U	0...60 °C	1	2...15 K	-	X
DBET-26/2	0...60 °C	2	1 K	2...5 K	-
DBET-22/2U	-30...+30 °C	2	1 K	2...5 K	X
DBET-23U	-30...+30 °C	1	1 K	-	X
DBET-26/2U	0...60 °C	2	1 K	2...5 K	X
DBET-27U	0...60 °C	1	1 K	-	X

CAPILLARY THERMOSTATS, IP54

A wide range of low cost thermostats.

Technical data	
Sensor element	Liquid-filled coiled copper bulb with capillary PVC protected
Bulb	Ø 6.8 mm
Length, capillary tube	1.5 m
Contacts	Microswitches with SPDT contacts (heat/cool)
Switch capacity	NC 16 (4) A 250 V AC / NO 10 (6) A 250 V AC
Ambient temperature	-10...+65 °C
Ambient humidity	10...90% RH (non-condensing)
Storage temperature	-40...+70 °C
Storage humidity	< 95 % RH
Max. bulb temperature	130 °C
Casing	Bayblend® base, ABS cover
Weight	360 g
Protection class	IP54
Isolation class	I
Dimensions	108 x 70 x 72 mm



TC090

Article	Temperature range	Hysteresis
TC060	0...60 °C	4±1 K
TC090	0...90 °C	4±1 K

ACCESSORIES

Article	Description
DBZ-30/14	Brass pocket 120 mm, Ø external 8 mm, Ø internal 7 mm, connection R 1/2".
DBZ-31/14	Stainless steel pocket AISI 304, 120 mm, Ø external 9 mm, Ø internal 7 mm, connection R 1/2".

CAPILLARY THERMOSTAT, IP65

High quality thermostats for use in cooling, heating and ventilation systems.

Technical data

Sensor element	Liquid-filled coiled copper bulb
Bulb	Ø 9.5 (Ø 8 for range 50...120°C)
Length, capillary tube	1.5 m
Contacts	Microswitches with SPDT contacts (heat/cool)
Switch capacity	15 (8) A, 24...250 V AC
Ambient temperature	-35...+65 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-40...+70 °C
Storage humidity	< 95 % RH
Casing	Bayblend® base, ABS cover
Dimensions	108 x 70 x 72 mm
Weight	400 g
Protection class	IP65
Isolation class	I



DBET-6



DBET-16U

Article	Temperature range	Steps	Hysteresis	Step diff.	Max. bulb temperature	Hidden setpoint	Immersion well to use
DBET-4	-30...+30 °C	1	2...20 K	-	60 °C	-	DBZ-01, DBZ-02
DBET-4U	-30...+30 °C	1	2...20 K	-	60 °C	X	DBZ-01, DBZ-02
DBET-4/2	-30...+30 °C	2	1 K	2...5 K	60 °C	-	DBZ-01, DBZ-02
DBET-5	-30...+30 °C	1	1 K	-	60 °C	-	DBZ-01, DBZ-02
DBET-6	-30...+30 °C	1	Minimum manual reset	-	60 °C	-	DBZ-01, DBZ-02
DBET-16	20...90 °C	1	2...20 K	-	100 °C	-	DBZ-01, DBZ-02
DBET-16U	20...90 °C	1	2...20 K	-	100 °C	X	DBZ-01, DBZ-02
DBET-17	20...90 °C	1	1 K	-	100 °C	-	DBZ-01, DBZ-02
DBET-18	20...90 °C	1	Maximum manual reset	-	100 °C	-	DBZ-01, DBZ-02
DBET-10	50...120 °C	1	2...20 K	-	150 °C	-	DBZ-17
DBET-5U	-30...+30 °C	1	1 K	-	60 °C	X	DBZ-01, DBZ-02
DBET-7	0...60 °C	1	2...20 K	-	75 °C	-	DBZ-01, DBZ-02
DBET-7/2	0...60 °C	2	1 K	2...5 K	75 °C	-	DBZ-01, DBZ-02
DBET-8	0...60 °C	1	1 K	-	75 °C	-	DBZ-01, DBZ-02
DBET-11	50...120 °C	1	1 K	-	150 °C	-	DBZ-17

ACCESSORIES

Article	Description
DBZ-01	Brass pocket 120mm, Ø external 11 mm, Ø internal 10 mm, connection R 1/2"
DBZ-02	Stainless steel pocket AISI 304, 120 mm, Ø external 12 mm, Ø internal 10 mm, connection R 1/2"
DBZ-16	Brass pocket 120mm, Ø external 10 mm, Ø internal 8,5 mm, connection R 1/2"
DBZ-17	Stainless steel AISI 304 120 mm, Ø external 10 mm, Ø internal 8,5 mm, connection R 1/2"

DUCT THERMOSTAT, IP54

A range of high quality duct thermostats.

Technical data	
Sensor element	Liquid-filled coiled copper bulb with 200 mm protection spring and mounting bracket
Contacts	Microswitches with SPDT contacts (heat/cool)
Switch capacity	TZ090U: NC 16 (6) A, 250 V AC, NO 6 (4) A, 250 V AC / TZR6585: NC 16 (2,5) A, 250 V AC, NO 0,5 A, 250 V AC
Ambient temperature	-35...+65 °C
Ambient humidity	10...90% RH (non-condensing)
Insertion length	200 / Ø 21 mm
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Casing	Bayblend® base, ABS cover
Weight	590 g
Dimensions	108 x 70 x 72 mm
Protection class	IP54
Isolation class	I



TZ090U



TZR6585

3

Article	Temperature range	Hysteresis	Max. bulb temperature	Function	Hidden setpoint	Switch capacity
TZ090U	0...90 °C	4±1 K	120 °C	With SPDT contact	X	NC 16 (6) A, 250 V AC / NO 6 (4) A, 250 V AC
TZR6585	65...85 °C	20±5 K	125 °C	Manual maximum reset (unit can be reset only if temperature drops below the setpoint minus the hysteresis.)	-	NC 16 (2,5) A, 250 V AC / NO 0,5 A, 250 V AC

ACCESSORIES

Article	Description
DBZ-25	Spiral protection bracket for capillary.



Note: the thermostats are supplied with spiral protection bracket model DBZ-25.

The device can only be riarmed if the temperature falls below the setpoint minus the hysteresis value.

DUCT THERMOSTAT, IP65

High quality thermostats for use in cooling, heating and ventilation systems.

Technical data	
Sensor element	Liquid-filled coiled copper bulb with 200 mm protection spring and mounting bracket
Contacts	Microswitches with SPDT contacts (heat/cool)
Switch capacity	15 (8) A, 24...250 V AC
Ambient temperature	-35...+65 °C
Ambient humidity	10...90 % RH (non-condensing)
Insertion length	200 / Ø 21 mm
Storage temperature	-40...+70 °C
Storage humidity	< 95 % RH
Casing	Bayblend® base, ABS cover
Weight	690
Dimensions	108 x 70 x 72 mm
Protection class	IP65
Isolation class	I



DBTZ-7



DBTZ-12U

Article	Temperature range	Steps	Hysteresis	Step diff.	Max. bulb temperature	Hidden setpoint
DBTZ-2U	-30...+30 °C	1	1 K	-	60 °C	X
DBTZ-7	0...60 °C	1	2...20 K	-	75 °C	-
DBTZ-7/2	0...60 °C	2	1 K	2...5 K	75 °C	-
DBTZ-8	0...60 °C	1	1 K	-	75 °C	-
DBTZ-12U	50...120 °C	1	Manual maximum reset	-	140 °C	X

ACCESSORIES

Article	Description
DBZ-25	Protection spring and mounting bracket. Suitable for MTID.



Note: the thermostats are supplied with spiral protection bracket model DBZ-25.

ELECTROMECHANICAL CLAMP-ON THERMOSTAT, IP20

High quality thermostats for use in cooling, heating and ventilation systems.

Technical data	
Sensor element	Bimetal
Contacts	SPDT contacts
Switch capacity	NC 16 (2,5) A, 250 V AC / NO 2,5 A, 250 V AC
Ambient temperature	max 85 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-20...+60 °C
Storage humidity	< 95 % RH
Max. bulb temperature	90 °C
Casing	Zinc-plated steel plate, not sealed ABS cover
Weight	150 g
Protection class	IP20
Dimensions	39 x 55 x 112 mm
Isolation class	I



AT2090

Article	Temperature range	Hysteresis	Hidden setpoint
AT2090	+20...+90 °C	8±3 K	-
AT2090U	+20...+90 °C	8±3 K	X

CLAMP-ON THERMOSTAT, IP65

Thermostats for use in cooling, heating and ventilation systems.

Technical data	
Sensor element	Liquid-filled coiled copper bulb for contact
Contacts	Microswitches with SPDT contacts (heat/cool)
Switch capacity	15 (8) A, 24...250 V AC
Ambient temperature	-35...+65 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-40...+70 °C
Storage humidity	< 95 % RH
Hysteresis	2...20 K
Casing	Bayblend® base, ABS cover
Weight	410 g
Protection class	IP65 class I
Isolation class	I
Dimensions	108 x 70 x 72 mm



DBAT-5



DBAT-5U

Article	Temperature range	Max. bulb temperature	Hidden setpoint
DBAT-3	0...60 °C	75 °C	-
DBAT-3U	0...60 °C	75 °C	X
DBAT-5	20...90 °C	95 °C	-
DBAT-5U	20...90 °C	95 °C	X

FROST PROTECTION THERMOSTAT

High quality frost protection thermostats for use in cooling, heating and ventilation systems.

Technical data

Sensor element	
Contacts	SPDT microswitch
Switch capacity	15 (8) A, 24...250 V AC
Accuracy	± 1K
Ambient temperature	Max. 55 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-30...+60 °C
Storage humidity	< 95 % RH
Max. bulb temperature	150 °C
Casing	Base in ABS, cover in transparent Polycarbonate (PC)
Weight	340 g
Protection class	IP65
Isolation class	I
Dimensions	140 x 62 x 65 mm (cable gland included)



TF30



TF60R



TF18

Article	Temperature range	Hysteresis	Reset	Capillary length
TF18	-10...+10 °C or +14...+50 °F	2 K	Automatic	1.8 m
TF18R	-10...+10 °C or +14...+50 °F	Manual minimal reset	Manual	1.8 m
TF30	-10...+10 °C or +14...+50 °F	2 K	Automatic	3 m
TF30R	-10...+10 °C or +14...+50 °F	Manual minimal reset	Manual	3 m
TF60	-10...+10 °C or +14...+50 °F	2 K	Automatic	6 m
TF60R	-10...+10 °C or +14...+50 °F	Manual minimal reset	Manual	6 m
TF150	-10...+10 °C or +14...+50 °F	Manual minimal reset	Automatic	15 m
TF150R	-10...+10 °C or +14...+50 °F	Manual minimal reset	Manual	15 m

ACCESSORIES

Article	Description
DBZ-01	Brass pocket 120mm, Ø external 11 mm, Ø internal 10 mm, connection R 1/2"
DBZ-02	Stainless steel pocket AISI 304, 120 mm, Ø external 12 mm, Ø internal 10 mm, connection R 1/2"
DBZ-05	Set of 6 mounting brackets for capillary of antifrost thermostats



DBZ-05

IMMERSION THERMOSTATS, IP54

Temperature control in pipes for heating, cooling and air conditioning systems, boilers and heaters. Temperature monitoring and safety protection with manual reset (2 stages).

Technical data	
Sensor element	Copper bulb with 120 mm brass pocket (on request with 200 mm length)
Contacts	Microswitches with SPDT contacts (heat/cool)
Switch capacity	With SPDT contact: NC 250 V AC 16 (6) A / NO 250 V AC 6 (4) manual maximum reset: NC 250 V AC 16 (2,5) A / NO 250 V AC 0,5 A
Ambient temperature	-35...+65 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Casing	Bayblend® base, ABS cover (2 stage models: sealed ABS)
Weight	single stage: 440 g double range: 560 g
Dimensions	108 x 70 x 72 mm (2 stage models: 132 x 88 x 70 mm)
Protection class	IP54
Isolation class	I



TV090



TV09090U

3

Article	Temperature range 1	Temperature range 2	Hysteresis range 1	Hysteresis range 2	Max. bulb temperature	Function	Hidden setpoint
TV090	0...90 °C		4±1 K	-	120 °C	with SPDT contact	-
TV090U	0...90 °C		4±1 K	-	120 °C	with SPDT contact	X
TVR6585	65...85 °C		20±5 K	-	125 °C	manual maximum reset	-
TVR90110	90...110 °C		20±5 K	-	125 °C	Manual maximum reset	-
TV09090U	0...90 °C	0...90 °C	4±1 K	4±1 K	120 °C	with SPDT contact	X
TV090UR85	0...90 °C	65...85 °C	4±1 K	20±5 K	120 °C	manual maximum reset with SPDT	-

ACCESSORIES

Article	Description
DBZ-30/14	Brass pocket 120 mm, Ø external 8 mm, Ø internal 7 mm, connection R 1/2"
DBZ-40/14	BBrass pocket 108 mm, Ø external 16 mm, Ø internal 15 mm, connection R 1/2"
DBZ-31/14	Stainless steel AISI 304 pocket, 120 mm, Ø external 9 mm, Ø internal 7 mm, connection R 1/2"
DBZ-41/14	Stainless steel AISI 304 pocket, 120 mm, Ø external 16 mm, Ø internal 15 mm, connection R 1/2"



Note: the thermostats are supplied with standard pocket models DBZ-30/14 and DBZ-40/14.

The unit can be reset only if temperature drops below the setpoint minus the hysteresis

IMMERSION THERMOSTAT, IP65

High quality immersion thermostats for use in cooling, heating and ventilation systems.

Technical data	
Sensor element	Liquid-filled coiled copper bulb
Contacts	Microswitches with SPDT contacts (heat/cool)
Switch capacity	15 (8) A, 24...250 V AC
Ambient temperature	-35...+65 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-40...+70 °C
Storage humidity	< 95 % RH
Casing	Bayblend® base, ABS cover
Weight	440 g
Dimensions	108 x 70 x 72 mm
Protection class	IP65
Isolation class	I

Article	Temperature range	Hysteresis	Max. bulb temperature	Hidden setpoint
DBTV-1	-30...+30 °C	2...20 K	60 °C	-
DBTV-2U	-30...+30 °C	1 K	60 °C	X
DBTV-7	0...+60 °C	2...20 K	75 °C	-
DBTV-7U	0...+60 °C	2...20 K	75 °C	X
DBTV-8	0...60 °C	1 K	75 °C	-
DBTV-8U	0...+60 °C	1 K	75 °C	X
DBTV-11	50...120 °C	1 K	140 °C	-
DBTV-16	+20...+90 °C	2...20 K	100 °C	-
DBTV-17	20...90 °C	1 K	100 °C	-
DBTV-17U	20...90 °C	1 K	100 °C	X
DBTV-18	20...90 °C	manual maximum reset	100 °C	-
DBTV-18U	20...90 °C	manual maximum reset	100 °C	X



DBTV-16



DBTV-18U

ACCESSORIES

Article	Description
DBZ-16/14	Brass pocket 120 mm, Ø external 10 mm, Ø internal 8,5 mm, connection R 1/2"
DBZ-17/14	Stainless steel pocket AISI 304, 120 mm, Ø external 10 mm, Ø internal 8,5 mm, connection R 1/2"



Note: the thermostats are supplied with standard pocket model DBZ-16/14.

The device can only be reset if the temperature falls below the setpoint minus the hysteresis.

POCKETS FOR THERMOSTATS

Pockets for thermostats in brass or stainless steel.

Article	Tube length	Total length	Outside diameter tube	Internal diameter tube	Connection (diameter)	Material	Fixing stopper
DBZ-01	120 mm	140 mm	11 mm	10 mm	R1/2"	Brass / Cu Ni	X
DBZ-02	120 mm	148 mm	12 mm	10 mm	R1/2"	Stainless steel EN 1.4301	X
DBZ-16	120 mm	140 mm	10 mm	8.5 mm	R1/2"	Brass / Cu Ni	X
DBZ-16/14	120 mm	140 mm	10 mm	8.5 mm	R 1/2"	Brass / Cu Ni	-
DBZ-17	120 mm	148 mm	10 mm	8.5 mm	R1/2"	Stainless steel AISI 304	X
DBZ-17/14	120 mm	148 mm	10 mm	8.5 mm	R 1/2"	Stainless steel EN 1.4301	-
DBZ-17/14/200	200 mm	228 mm	10 mm	8,5 mm	R1/2"	Acciaio inox AISI 304	X
DBZ-18	40 mm	61 mm	11 mm	10 mm	R1/2"	Brass / Cu Ni	X
DBZ-19	40 mm	68 mm	10 mm	8.5 mm	R1/2"	Stainless steel AISI 304	X
DBZ-30/14	120 mm	140 mm	8 mm	7 mm	R1/2"	Brass / Cu Ni	X
DBZ-31/14	120 mm	148 mm	9 mm	7 mm	R1/2"	Stainless steel EN 1.4301	X
DBZ-40/14	108 mm	128 mm	16 mm	15 mm	R1/2"	Brass / Cu Ni	X
DBZ-41/14	120 mm	148 mm	16 mm	14 mm	R1/2"	Stainless steel AISI 304	X



For additional lengths of stainless steel versions contact Industrietechnik



DBZ-01



DBZ-02



DBZ-16-14



DBZ-17-14



DBZ-18



DBZ-19



DBZ-31-14



DBZ-30-14




DBZ-40-14



DBZ-41-14

4 Electric heating controllers

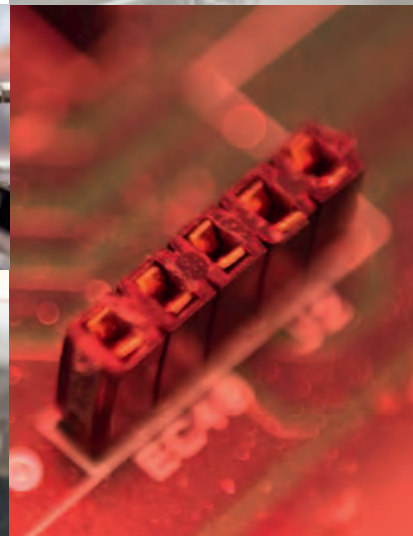

CONTROLLER WITH PI-CONTROL, 230...400 V AC, WALL MOUNTING

Wall mounted electric heating controller intended for control of radiators or electric heating coils. It is a complete controller with built-in sensor and setpoint adjustment. It pulses the whole load on/off and utilises time-proportional triac control. Both automatic control function adaptation, P- or PI-control and supply voltage adaptation, 230 V / 400 V.

Technical data	
Supply voltage	230...400 (210 - 415 V ~ 50/60 Hz 16 A)
Ambient temperature	0...30 °C
P-band	20 K (rapid temperature changes), 1.5 K (slow temperature changes)
I-time	6 min (rapid temperature changes)
Pulse period	60 s
Dimensions	95 x 153 x 41 mm
Protection class	IP20
Inputs/outputs (I/Os)	
Setpoint range	0...30 °C (the external sensor determines the temperature range)
Night setback	0...10 K
Output load	Resistive load, max 16 A, min 1 A

Article	Description	Mounting
CTR-M	Electric heating controller with min./max. limitation	Wall
CTR/D	Electric heating controller	DIN-rail
CTR-ADD	Add-on unit	Wall
CTR-X/D	Electric heating controller for external 0...10 V DC control signal	DIN-rail



CTR-M



CTR-D



CTR-ADD

ELECTRIC HEATING CONTROLLER FOR EXTERNAL INPUT SIGNAL 0-10 V, 230 V AC OR 400 V AC, WALL MOUNTING

Electric heating controller for controlling electric heating batteries, electric panels etc. It operates on an input signal from an external controller.

Technical data	
Supply voltage	...230X...: 230 V ~ (207...253 V ~ 50/60 Hz 16 A) ...400X...: 400 V ~ (360...440 V ~ 50/60 Hz 16 A)
Ambient temperature	0...30 °C, non-condensing
Pulse period	6/60/120 s, adjustable
Dimensions, external (WxHxD)	93 x 153 x 40 mm
Mounting	Wall
Protection class	IP20

Article	Description	Supply voltage
CTR230X010	Electric heating controller for external 0...10 V DC control signal	230 V AC
CTR400X010	Electric heating controller for external 0...10 V DC control signal	400 V AC



CTR230X010



CTR400X010

ELECTRIC HEATING CONTROLLER FOR WALL MOUNTING, 3-PHASE, 210...415 V

The controller can be used with internal or external setpoint. Automatic control function adaptation, P- or PI-control. The controller can also be set to be controlled by an external 0...10 V DC signal.

Technical data	
Supply voltage	3-phase, 210...255 / 380...415 V AC, automatic adaptation
Setpoint	0...30 °C (the sensor determines the range)
Max. load	Max. 25 A, min. 3 A/phase
Sensor inputs	Two, main and min./max. limiting sensors (NTC sensor)
Control signal	0...10 V DC (external signal)
Mounting	Wall
Protection class	IP30
P-band	Supply air temperature control: 20 K, fixed Room temperature control: 1.5 K, fixed
I-time (supply air temperature control)	6 min, fixed
Pulse period	6...120 s
Dimensions	160 x 207 x 94 mm

Article	Description
CTR2000	Electric heating controller



CTR2000

4

SLAVE BOARD FOR ELECTRIC HEATING CONTROLLERS

CTR-S1 is intended for use together with the electric heating controller CTR2000, in order to control extra loads.

Article	Description
CTR-S1	Slave board for control of extra loads (+17 kW)



CTR-S1

ELECTRIC HEATING CONTROLLER FOR DIN-RAIL MOUNTING, 3-PHASE, 210...415 V, 25 A

For control of electric heating coils or radiators. The controllers pulse the whole load on/off and utilise time-proportional triac control. Automatic control function adaptation, P- or PI-control. The controllers can also be set to be controlled by an external 0...10 V DC signal.



CTR25

Technical data	
Supply voltage	3-phase, 210...255 / 380...415 V AC, automatic adaptation
Ambient temperature	0...40 °C
Mounting	DIN-rail
Dimensions (WxHxD)	195 x 200 x 95 mm
Protection class	IP20
P-band	Supply air temperature control: 20 K, fixed Room temperature control: 1.5 K, fixed
I-time	6 min, fixed
Pulse period	6...60
Load	25 A
Output	25 A, 3 x 400 V AC, 17 kW (3 x 230 V, 10 kW)
Inputs	
Setpoint	0...30 °C (the sensor determines the range)
Sensor inputs	2, main and max./min. limiting sensors (NTC sensor).
Control signal	0...10 V DC

Article	Description	External 0...10 V DC control signal option
CTR25	Electric heating controller with temperature control	X



To control larger electrical loads, see the step controllers SC4 and SC6.

ELECTRIC HEATING CONTROLLER FOR DIN-RAIL MOUNTING, 3-PHASE, 210...415 V, 40 A

For control of electric heating coils or radiators. The controllers pulse the whole load on/off and utilise time-proportional triac control. Automatic control function adaptation, P- or PI-control. The controllers can also be set to be controlled by an external 0...10 V DC signal.



CTR40

Technical data	
Supply voltage	3-phase, 210...255 / 380...415 V AC, automatic adaptation
Ambient temperature	0...40 °C
Mounting	DIN-rail
Dimensions (WxHxD)	195 x 220 x 95 mm
Protection class	IP20
P-band	Supply air temperature control: 20 K, fixed Room temperature control: 1.5 K, fixed
I-time	6 min, fixed
Pulse period	6...60 s
Load	40 A
Output	40 A, 3 x 400 V AC, 27 kW (3 x 230 V, 16 kW)
Inputs	
Setpoint	0...30 °C (the sensor determines the range)
Sensor inputs	Two, main and max./min. limiting sensors (NTC sensor).
Control signal	0...10 V DC

Article	Description	External 0...10 V DC control signal option
CTR40	Electric heating controller with temperature control	X



To control larger electrical loads, see the step controllers SC4 and SC6.

ELECTRIC HEATING CONTROLLER FOR DIN-RAIL MOUNTING, 3-PHASE, 400 V, 80 A

For control of electric heating coils or radiators. The controllers pulse the whole load on/off and utilise time-proportional triac control. Automatic control function adaptation, P- or PI-control. The controllers can also be set to be controlled by an external 0...10 V DC signal.



CTR80



Technical data	
Supply voltage	3-phase, 400 V AC $\pm 10\%$
Ambient temperature	0...40 °C
Mounting	DIN-rail
Dimensions (WxHxD)	195 x 220 x 105 mm
Protection class	IP20
P-band	Supply air temperature control: 20 K, fixed Room temperature control: 1.5 K, fixed
I-time	6 min, fixed
Pulse period	6...120 s
Load	80 A
Output	80 A, 3 x 400 V AC, 55 kW
Inputs	
Setpoint	0...30 °C (the sensor determines the range)
Sensor inputs	Two, main and max./min. limiting sensors (NTC sensor).
Control signal	0...10 V DC

Article	Description	External 0...10 V DC control signal option
CTR80	Electric heating controller with temperature control	X



To control larger electrical loads, see the step controllers SC4 and SC6.

5 Sensors, transmitters and switches

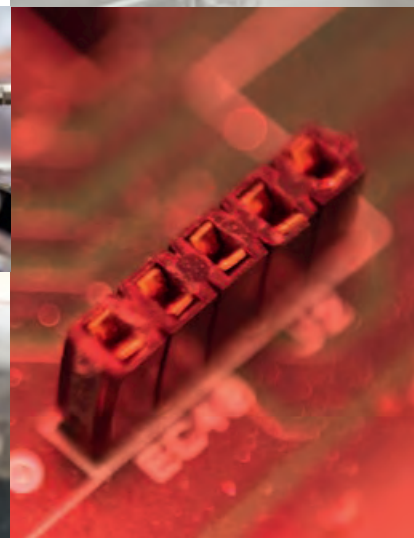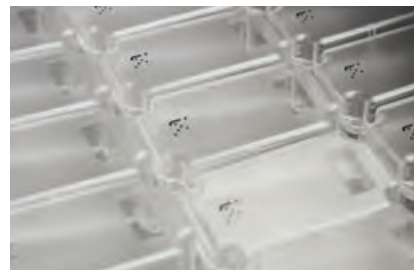

Temperature transmitters and sensors

News!

CLAMP-ON SENSOR WITH HOUSING

Clamp-on sensor for surface temperature measurement.

Technical data			
Protection class		IP65	
Time constant		3 s	
Measuring range, temperature		-20...+120 °C	
Cable gland		M16	
Dimensions, external (WxHxD)		104 x 78 x 51 mm	
Accessories, included		Two metal straps and heat-conductive paste (art.nr: PASTA-20).	
Material			
Material, housing		Polycarbonate (PC)	
Material, base		Polycarbonate (PC)	

Article	Sensor element	Nominal resistance	Equivalent
SC-PT100-Y	PT100	100 Ω (0°C)	-
SC-PT1000-Y	PT1000	1000 Ω (0°C)	-
SC-NTC1.8-Y	NTC 1.8	1800 Ω (25°C)	TAC
SC-NTC2.2-Y	NTC 2.2	2252 Ω (25°C)	Johnson Controls
SC-NTC10-01-Y	NTC 10	10 kΩ (25°C)	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell - Distech
SC-NTC10-02-Y	NTC 10	10 kΩ (25°C)	Carel - Evco - Eliwell - AB Industrietechnik
SC-NTC10-03-Y	NTC 10	10 kΩ (25°C)	Andover - Delta Controls - Siebe - York
SC-NTC20-Y	NTC 20	20 kΩ (25°C)	Honeywell
SC-NI1000-01-Y	Ni1000	1000 Ω (0°C)	Siemens - Landis & Staefa
SC-NI1000-02-Y	Ni1000	1000 Ω (0°C)	Sauter



SC

CLAMP-ON SENSOR WITH CABLE

For surface temperature measurement. Including clamp (Ø max 40 mm).

Technical data				
Material	Nickel-plated copper			
Cable length	1.5 m			
Protection class	IP65			
Dimensions	36 x 10.5 x 7.5 / models with PVC sleeve: 23.5 x 6 x 9.5 mm			

Article	Sensor element	Nominal resistance	Temperature range	Equivalent
SCC-PT100	PT100	100 Ω (0°C)	-30...+150 °C	-
SCC-PT1000	PT1000	1000 Ω (0°C)	-30...+150 °C	-
SCC-NTC1.8	NTC 1.8	1800 Ω (25°C)	-30...+120 °C	TAC
SCC-NTC2.2	NTC 2.2	2252 Ω (25°C)	-30...+150 °C	Johnson Controls
SCC-NTC10-01	NTC 10	10 kΩ (25°C)	-30...+150 °C	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell - Distech
SCC-NTC10-02	NTC 10	10 kΩ (25°C)	-30...+110 °C	Carel - Evco - Eliwell - AB Industrietechnik
SCC-NTC10-02-BR-J	NTC 10	10 kΩ (25°C)	-50...+110 °C	Carel - Evco - Eliwell - AB Industrietechnik
SCC-NTC10-03	NTC 10	10 kΩ (25°C)	-30...+150 °C	Andover - Delta Controls - Siebe - York
SCC-NTC15-01	NTC 15	15 kΩ (0°C)	0...30 °C	Regin - AB Industrietechnik
SCC-NTC20	NTC 20	20 kΩ (25°C)	-30...+150 °C	Honeywell
SCC-NI1000-01	Ni1000	1000 Ω (0°C)	-30...+150 °C	Siemens - Landis & Staefa
SCC-NI1000-02	Ni1000	1000 Ω (0°C)	-30...+150 °C	Sauter



SCC



SCC-NTC10-02-BR-J



SCC-NTC15-01

ACCESSORIES

Article	Description
PASTA-20	Heat-conductive paste in tube, 20 g

DUCT SENSOR WITH HOUSING

Duct sensor for air temperature measurement in ventilation ducts.

Technical data	
Protection class	IP65
Cable gland	M16
Diameter, probe	8 mm
Dimensions, external (WxHxD)	78 x 263 x 104 mm
Time constant	16 s
Measuring range, temperature	-30...+70 °C
Material	
Material, housing	Polycarbonate (PC)
Material, base	Polycarbonate (PC)
Material, probe	Stainless steel, SUS304

MODELS

Article	Sensor element	Nominal resistance	Insertion length	Equivalent
STC-PT100-Y	PT100	100 Ω (0°C)	60...205 mm	-
STC-PT1000-Y	PT1000	1000 Ω (0°C)	60...205 mm	-
STC-PT1000/430-Y	PT1000	1000 Ω (0°C)	60...405 mm	-
STC-NTC1.8-Y	NTC 1.8	1800 Ω (25°C)	60...205 mm	TAC
STC-NTC2.2-Y	NTC 2.2	2252 Ω (25°C)	60...205 mm	Johnson Controls
STC-NTC10-01-Y	NTC 10	10 kΩ (25°C)	60...205 mm	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell - Distech
STC-NTC10-02-Y	NTC 10	10 kΩ (25°C)	60...205 mm	Carel - Evco - Eliwell - AB Industrietechnik
STC-NTC10-03-Y	NTC 10	10 kΩ (25°C)	60...205 mm	Andover - Delta Controls - Siebe - York
STC-NTC20-Y	NTC 20	20 kΩ (25°C)	60...205 mm	Honeywell
STC-Ni1000-01-Y	Ni1000	1000 Ω (0°C)	60...205 mm	Siemens - Landis & Staefa
STC-Ni1000-02-Y	Ni1000	1000 Ω (0°C)	60...205 mm	Sauter



STC

5

DUCT SENSOR WITH CABLE

Duct sensor for air temperature measurement in ventilation ducts. Adjustable insertion length.

Technical data	
Cable length	1.5 m
Insertion length	15...145 mm adjustable
Diameter	9 mm
Protection class	IP20

Article	Sensor element	Nominal resistance	Temperature range	Equivalent
STCC-PT100	PT100	100 Ω (0°C)	-30...+70 °C	-
STCC-PT1000	PT1000	1000 Ω (0°C)	-30...+70 °C	-
STCC-NTC1.8	NTC 1.8	1800 Ω (25°C)	-30...+70 °C	TAC
STCC-NTC2.2	NTC 2.2	2252 Ω (25°C)	-30...+70 °C	Johnson Controls
STCC-NTC10-01	NTC 10	10 kΩ (25°C)	-30...+70 °C	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell - Distech
STCC-NTC10-02	NTC 10	10 kΩ (25°C)	-30...+70 °C	Carel - Evco - Eliwell - AB Industrietechnik
STCC-NTC10-03	NTC 10	10 kΩ (25°C)	-30...+70 °C	Andover - Delta Controls - Siebe - York
STCC-NTC15-01	NTC 15	15 kΩ (0°C)	0...30 °C	Regin - AB Industrietechnik
STCC-NTC15-02	NTC 15	15 kΩ (0°C)	0...60 °C	Regin - AB Industrietechnik
STCC-NTC15-03	NTC 15	15 kΩ (20°C)	20...50 °C	Regin - AB Industrietechnik
STCC-NTC15-04	NTC 15	15 kΩ (0°C)	0...40 °C	Regin - AB Industrietechnik
STCC-NTC20	NTC 20	20 kΩ (25°C)	-30...+70 °C	Honeywell
STCC-Ni1000-01	Ni1000	1000 Ω (0°C)	-30...+70 °C	Siemens - Landis & Staefa
STCC-Ni1000-02	Ni1000	1000 Ω (0°C)	-30...+70 °C	Sauter



STCC

DUCT SENSOR WITH HOUSING FOR AVERAGE TEMPERATURE MEASUREMENT

Sensor with a 4-point average temperature measurement for duct mounting.

News!



STM PT1000

Technical data

Protection class	IP65
Time constant	63 s at 2 m/s and 43 s at 5 m/s
Insertion length	75 mm
Measuring range, temperature	-20...+70 °C
Cable gland	M16
Diameter	8 mm
Dimensions, external (WxHxD)	78 x 132 x 104 mm
Sensor cable length	3 m

Material

Material, housing	Polycarbonate (PC)
Material, base	Polycarbonate (PC)
Material, probe	Stainless steel, SUS304

MODELS

Article	Sensor element	Nominal resistance	Equivalent
STM-PT1000-Y	PT1000 (DIN class B)	1000 Ω (0°C)	-

IMMERSION SENSOR WITH HOUSING, WITHOUT WELL, R1/4"

Immersion sensor for temperature measurement of heating or cooling batteries in ventilation units. Probe in stainless steel without a well.

News!



SI

Technical data

Protection class	IP65
Time constant	4 s
Insertion length	90 mm
Measuring range, temperature	-20...+120 °C
Cable gland	M16
Connection, without well	R1/4"
Diameter, probe	5 mm
Pressure rating	PN16
Dimensions, external (WxHxD)	78 x 158 x 104 mm

Material

Material, housing	Polycarbonate (PC)
Material, base	Polycarbonate (PC)
Material, probe	Stainless steel, SUS304

Article	Sensor element	Nominal resistance	Equivalent
SI-PT100-Y	PT100	100 Ω (0°C)	-
SI-PT1000-Y	PT1000	1000 Ω (0°C)	-
SI-NTC1.8-Y	NTC 1.8	1800 Ω (25°C)	TAC
SI-NTC2.2-Y	NTC 2.2	2252 Ω (25°C)	Johnson Controls
SI-NTC10-01-Y	NTC 10	10 kΩ (25°C)	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell - Distech
SI-NTC10-02-Y	NTC 10	10 kΩ (25°C)	Carel - Evco - Eliwell - AB Industrietechnik
SI-NTC10-03-Y	NTC 10	10 kΩ (25°C)	Andover - Delta Controls - Siebe - York
SI-NTC20-Y	NTC 20	20 kΩ (25°C)	Honeywell
SI-NI1000-01-Y	Ni1000	1000 Ω (0°C)	Siemens - Landis & Staefa
SI-NI1000-02-Y	Ni1000	1000 Ω (0°C)	Sauter

IMMERSION SENSOR WITH HOUSING AND WELL

Immersion sensor for temperature measurement in heating- or cooling applications. Supplied with a stainless steel well. Available in different lengths.



STI

Technical data	
Protection class	IP65
Time constant	18 s
Measuring range, temperature	-20...+120 °C
Cable gland	M16
Connection, well	R1/2"
Diameter, well	8 mm
Pressure rating	PN25
Dimensions, external (WxHxD)	78 x 156 x 104 mm
Material	
Material, housing	Polycarbonate (PC)
Material, base	Polycarbonate (PC)
Material, probe	Stainless steel, SUS304
Material, well	Stainless steel, SUS304

MODELS

Article	Sensor element	Nominal resistance	Insertion length	Equivalent
STI-PT100-Y	PT100	100 Ω (0°C)	90 mm	-
STI-PT1000-50-Y	PT1000	1000 Ω (0°C)	50 mm	-
STI-PT1000-Y	PT1000	1000 Ω (0°C)	90 mm	-
STI-PT1000-120-Y	PT1000	1000 Ω (0°C)	120 mm	-
STI-PT1000-170-Y	PT1000	1000 Ω (0°C)	170 mm	-
STI-PT1000-310-Y	PT1000	1000 Ω (0°C)	310 mm	-
STI-NTC1.8-Y	NTC 1.8	1800 Ω (25°C)	90 mm	TAC
STI-NTC2.2-Y	NTC 2.2	2252 Ω (25°C)	90 mm	Johnson Controls
STI-NTC10-01-Y	NTC 10	10 kΩ (25°C)	90 mm	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell - Distech
STI-NTC10-02-Y	NTC 10	10 kΩ (25°C)	90 mm	Carel - Evco - Eliwell - AB Industrietechnik
STI-NTC10-03-Y	NTC 10	10 kΩ (25°C)	90 mm	Andover - Delta Controls - Siebe - York
STI-NTC20-Y	NTC 20	20 kΩ (25°C)	90 mm	Honeywell
STI-NI1000-01-Y	Ni1000	1000 Ω (0°C)	90 mm	Siemens - Landis & Staefa
STI-NI1000-02-Y	Ni1000	1000 Ω (0°C)	90 mm	Sauter

ACCESSORIES

Article	Insertion length	Material
DBZ-50WA	50 mm	Acid-proof stainless steel, SUS316
DBZ-90WA	90 mm	Acid-proof stainless steel, SUS316
DBZ-120WA	120 mm	Acid-proof stainless steel, SUS316
DBZ-170WA	170 mm	Acid-proof stainless steel, SUS316
DBZ-310WA	310 mm	Acid-proof stainless steel, SUS316



Insertion length 310 mm is available upon request, please contact Industrietechnik for more information.

IMMERSION SENSOR WITH DIN HEAD

Immersion sensor for industrial applications.



DPTD

Technical data	
Pressure rating	PN6
Material, well	Stainless steel AISI 304
Diameter, well	6 mm
Insertion length	200 mm
Dimensions	Max. Ø 82 x h 307 mm
Protection class	IP54
Precision	Class B

Article	Sensor element	Nominal resistance	Temperature range
DPTD-PT100	PT100	100 Ω (0°C)	-50...+600 °C
DPTD-PT1000	PT1000	1000 Ω (0°C)	-50...+600 °C

IMMERSION SENSOR WITH FIXED CABLE

Immersion sensor for water temperature measurement with threaded connection R1/4".

Technical data	
Temperature range	-30...+70 °C
Cable length	1.5 m
Connection	R1/4"
Diameter	4 mm
Material, probe	Stainless steel, SUS304
Pressure rating	PN10
Protection class	IP65



STIC

Article	Sensor element	Nominal resistance	Insertion length	Equivalent
STIC-PT100/135	PT100	100 Ω (0°C)	135 mm	-
STIC-PT1000/135	PT1000	1000 Ω (0°C)	135 mm	-
STIC-NTC1.8/135	NTC 1.8	1800 Ω (25°C)	135 mm	TAC
STIC-NTC2.2/135	NTC 2.2	2252 Ω (25°C)	135 mm	Johnson Controls
STIC-NTC10-01/135	NTC 10	10 kΩ (25°C)	135 mm	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell - Distech
STIC-NTC10-02/135	NTC 10	10 kΩ (25°C)	135 mm	Carel - Evco - Eliwell - AB Industrietechnik
STIC-NTC10-03/135	NTC 10	10 kΩ (25°C)	135 mm	Andover - Delta Controls - Siebe - York
STIC-NTC20/135	NTC 20	20 kΩ (25°C)	135 mm	Honeywell
STIC-NI1000-01/135	Ni1000	1000 Ω (0°C)	135 mm	Siemens - Landis & Staefa
STIC-NI1000-02/135	Ni1000	1000 Ω (0°C)	135 mm	Sauter

Article	Sensor element	Nominal resistance	Insertion length	Equivalent
STIC-PT100/220	PT100	100 Ω (0°C)	220 mm	-
STIC-PT1000/220	PT1000	1000 Ω (0°C)	220 mm	-
STIC-NTC1.8/220	NTC 1.8	1800 Ω (25°C)	220 mm	TAC
STIC-NTC2.2/220	NTC 2.2	2252 Ω (25°C)	220 mm	Johnson Controls
STIC-NTC10-01/220	NTC 10	10kΩ (25°C)	220 mm	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell
STIC-NTC10-02/220	NTC 10	10kΩ (25°C)	220 mm	Carel - Evco - Eliwell - AB Industrietechnik
STIC-NTC10-03/220	NTC 10	10kΩ (25°C)	220 mm	Andover - Delta Controls - Siebe - York
STIC-NTC20/220	NTC 20	20kΩ (25°C)	220 mm	Honeywell
STIC-NI1000-01/220	Ni1000	1000 Ω (0°C)	220 mm	Siemens - Landis & Staefa
STIC-NI1000-02/220	Ni1000	1000 Ω (0°C)	220 mm	Sauter

Article	Sensor element	Nominal resistance	Insertion length	Equivalent
STIC-PT100/300	PT100	100 Ω (0°C)	300 mm	-
STIC-PT1000/300	PT1000	1000 Ω (0°C)	300 mm	-
STIC-NTC1.8/300	NTC 1.8	1800 Ω (25°C)	300 mm	TAC
STIC-NTC2.2/300	NTC 2.2	2252 Ω (25°C)	300 mm	Johnson Controls
STIC-NTC10-01/300	NTC 10	10 kΩ (25°C)	300 mm	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell - Distech
STIC-NTC10-02/300	NTC 10	10 kΩ (25°C)	300 mm	Carel - Evco - Eliwell - AB Industrietechnik
STIC-NTC10-03/300	NTC 10	10 kΩ (25°C)	300 mm	Andover - Delta Controls - Siebe - York
STIC-NTC20/300	NTC 20	20 kΩ (25°C)	300 mm	Honeywell
STIC-NI1000-01/300	Ni1000	1000 Ω (0°C)	300 mm	Siemens - Landis & Staefa
STIC-NI1000-02/300	Ni1000	1000 Ω (0°C)	300 mm	Sauter

ACCESSORIES

Article	Description
DF	Mounting flange for 135 mm long sensors for mounting in ventilation ducts



DF

WELL

Well for immersion sensors.

Technical data

Connection	R1/2"
Pressure rating	PN25

Article	Insertion length
DBZ-90R	90 mm
DBZ-135R	135 mm
DBZ-50WA	50 mm
DBZ-90WA	90 mm
DBZ-120WA	120 mm
DBZ-170WA	170 mm
DBZ-310WA	310 mm



DBZ-90WA



DBZ-135R

ACCESSORIES

Article	Description
DBZ-AD1	Adapter 1/4" to 1/2". For mounting immersion sensors in 1/2".



DBZ-AD1

ROOM SENSOR

For room temperature measurement.

Technical data

Temperature range	0...50 °C
Dimensions	86 x 86 x 30 mm
Protection class	IP30



SA

Article	Sensor element	Nominal resistance	Temperature range	Equivalent
SA-PT100	PT100	100 Ω (0°C)	0...50 °C	-
SA-PT1000	PT1000	1000 Ω (0°C)	0...50 °C	-
SA-NTC1.8	NTC 1.8	1800 Ω (25°C)	0...50 °C	TAC
SA-NTC2.2	NTC 2.2	2252 Ω (25°C)	0...50 °C	Johnson Controls
SA-NTC10-01	NTC 10	10 kΩ (25°C)	0...50 °C	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell
SA-NTC10-02	NTC 10	10 kΩ (25°C)	0...50 °C	Carel - Evco - Eliwell - AB Industrietechnik
SA-NTC10-03	NTC 10	10 kΩ (25°C)	0...50 °C	Andover - Delta Controls - Siebe - York
SA-NTC15-01	NTC 15	15 kΩ (0°C)	0...30 °C	Regin - AB Industrietechnik
SA-NTC15-03	NTC 15	15 kΩ (20°C)	20...50 °C	Regin - AB Industrietechnik
SA-NTC15-04	NTC 15	15 kΩ (0°C)	0...40 °C	Regin - AB Industrietechnik
SA-NTC20	NTC 20	20 kΩ (25°C)	0...50 °C	Honeywell
SA-NI1000-01	Ni1000	1000 Ω (0°C)	0...50 °C	Siemens - Landis & Staefa
SA-NI1000-02	Ni1000	1000 Ω (0°C)	0...50 °C	Sauter

ROOM SENSOR WITH SETPOINT ADJUSTMENT

For room temperature measurement. Can also be used solely for setpoint adjustment.

Technical data					
Dimensions		86 x 86 x 30 mm			
Protection class		IP30			
Article	Sensor element	Nominal resistance	Potentiometer range	Temperature range	Equivalent
SAP-PT100-2	PT100	100 Ω (0°C)	5...30 °C 0...10 kΩ	0...50 °C	-
SAP-PT1000-1	PT1000	1000 Ω (0°C)	5...31 °C 1020...1120 Ω	0...50 °C	-
SAP-PT1000-2	PT1000	1000 Ω (0°C)	5...30 °C 0...10 kΩ	0...50 °C	-
SAP-NTC1.8-2	NTC 1.8	1800 Ω (25°C)	5...30 °C 0...10 kΩ	0...50 °C	TAC
SAP-NTC2.2-2	NTC 2.2	2252 Ω (25°C)	5...30 °C 0...10 kΩ	0...50 °C	
SAP-NTC10-01-2	NTC 10	10 kΩ (25°C)	5...30 °C 0...10 kΩ	0...50 °C	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell
SAP-NTC10-02-2	NTC 10	10 kΩ (25°C)	5...30 °C 0...10 kΩ	0...50 °C	Carel - Evco - Eliwell - AB Industrietechnik
SAP-NTC10-03-2	NTC 10	10 kΩ (25°C)	5...30 °C 0...10 kΩ	0...50 °C	Andover - Delta Controls - Siebe - York
SAP-NTC15-01-3	NTC 15	15 kΩ (0°C)	0...30 °C 0...5 kΩ	0...30 °C	Regin - AB Industrietechnik
SAP-NTC20-2	NTC 20	20 kΩ (25°C)	5...30 °C 0...10 kΩ	0...50 °C	Honeywell
SAP-NI1000-01-2	Ni1000	1000 Ω (0°C)	5...30 °C 0...10 kΩ	0...50 °C	Siemens - Landis & Staefa
SAP-NI1000-02-2	Ni1000	1000 Ω (0°C)	5...30 °C 0...10 kΩ	0...50 °C	Sauter



SAP

5

OUTDOOR TEMPERATURE SENSOR WITH HOUSING

Outdoor sensor for air temperature measurement.

Technical data	
Protection class	IP65
Measuring range, temperature	-50...+70 °C
Cable gland	M16
Dimensions, external (WxHxD)	78 x 51 x 104 mm
Material	
Material, housing	Polycarbonate (PC)
Material, base	Polycarbonate (PC)



SE

MODELS

Article	Sensor element	Nominal resistance	Equivalent
SE-PT100-Y	PT100	100 Ω (0°C)	-
SE-PT1000-Y	PT1000	1000 Ω (0°C)	-
SE-NTC1.8-Y	NTC 1.8	1800 Ω (25°C)	TAC
SE-NTC2.2-Y	NTC 2.2	2252 Ω (25°C)	Johnson Controls
SE-NTC10-01-Y	NTC 10	10 kΩ (25°C)	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell - Distech
SE-NTC10-02-Y	NTC 10	10 kΩ (25°C)	Carel - Evco - Eliwell - AB Industrietechnik
SE-NTC10-03-Y	NTC 10	10 kΩ (25°C)	Andover - Delta Controls - Siebe - York
SE-NTC20-Y	NTC 20	20 kΩ (25°C)	Honeywell
SE-NI1000-01-Y	Ni1000	1000 Ω (0°C)	Siemens - Landis & Staefa
SE-NI1000-02-Y	Ni1000	1000 Ω (0°C)	Siemens - Landis & Staefa

CABLE TEMPERATURE SENSOR, METAL BULB



NT04

Technical data	
Material, bulb	Stainless steel AISI 304
Material, cable	Thermoplastic rubber
Bulb length	40 mm
Cable length	2 m
Diameter	4 mm
Protection class	IP67

Article	Sensor element	Nominal resistance	Temperature range	Compatible with
NT0420-NTC1.8	NTC 1.8	1800 Ω (25°C)	-50...+110 °C	Tac
NT0420-NTC2.2	NTC 2.2	2252 Ω (25°C)	-50...+110 °C	Johnson Controls
NT0420-NTC10-01	NTC 10	10 k Ω (25°C)	-50...+110 °C	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell
NT0420-NTC10-02	NTC 10	10 k Ω (25°C)	-50...+110 °C	Carel - Evco - Eliwell - AB Industrietechnik
NT0420-NTC10-03	NTC 10	10 k Ω (25°C)	-50...+110 °C	Andover - Delta Controls - Siebe - York
NT0420-NTC20	NTC 20	20 k Ω (25°C)	-50...+110 °C	Honeywell
NT0420-Ni1000-01	Ni1000	1000 Ω (0°C)	-50...+110 °C	Siemens - Landis & Staefa
NT0420-Ni1000-02	Ni1000	1000 Ω (0°C)	-50...+110 °C	Sauter

CABLE TEMPERATURE SENSOR, PVC BULB



NT02

Technical data	
Material, bulb	PP
Material, cable	PVC
Bulb length	23 mm
Cable length	2 m
Diameter	6 mm
Protection class	IP67

Article	Sensor element	Nominal resistance	Temperature range	Equivalent
NT0220-NTC1.8	NTC 1.8	1800 Ω (25°C)	-40...+80 °C	Tac
NT0220-NTC2.2	NTC 2.2	2252 Ω (25°C)	-40...+80 °C	Johnson Controls
NT0220-NTC10-01	NTC 10	10 k Ω (25°C)	-40...+80 °C	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell
NT0220-NTC10-02	NTC 10	10 k Ω (25°C)	-40...+80 °C	Carel - Evco - Eliwell - AB Industrietechnik
NT0220-NTC10-03	NTC 10	10 k Ω (25°C)	-40...+80 °C	Andover - Delta Controls - Siebe - York
NT0220-NTC20	NTC 20	20 k Ω (25°C)	-40...+80 °C	Honeywell
NT0220-NTC100	NTC 100	100 k Ω (25°C)	-40...+80 °C	Industrietechnik
NT0220-Ni1000-01	Ni1000	1000 Ω (0°C)	-40...+80 °C	Siemens - Landis & Staefa
NT0220-Ni1000-02	Ni1000	1000 Ω (0°C)	-40...+80 °C	Sauter

CABLE TEMPERATURE SENSOR SENSOR, NTC

Technical data	
Sensor element	NTC, 15...10 kΩ
Material, bulb	Nickel plated brass
Material, cable	Silicone
Bulb length	50 mm
Cable length	1.5 m
Diameter	6 mm
Protection class	IP65



NT05

Article	Sensor element	Nominal resistance	Temperature range	Compatible with
NT0515-NTC15	NTC 15	15 kΩ (0°C)	0...30 °C	Regin

ACCESSORIES

Article	Description
PASTA-20	Heat-conductive paste in tube, 20 g



This sensor cannot be used together with the CTR series.

5

CABLE TEMPERATURE SENSOR, METAL HOUSING, PT100/PT1000

Universal sensor.

Technical data	
Material, bulb	Stainless steel AISI 304
Material, cable	Thermoplastic rubber
Bulb length	40 mm
Cable length	1.5 m
Diameter	4 mm
Protection class	IP67
Accuracy	class B



PT04

Article	Sensor element	Nominal resistance	Temperature range	Compatible with
PT0415-PT100	PT100	100 Ω (0°C)	-30...+110 °C	Universal
PT0415-PT1000	PT1000	1000 Ω (0°C)	-30...+110 °C	Universal

CABLE TEMPERATURE SENSOR -50...+200 °C, METAL BULB

Technical data	
Material, tube	Stainless steel AISI 304
Material, cable	Silicone
Bulb length	100 mm
Cable length	2 m (3 wires)
Diameter	6 mm
Protection class	IP67
Precision	Class B



PT10

Article	Sensor element	Nominal resistance	Temperature range	Compatible with
PT1020-PT100	PT100	100 Ω (0°C)	-50...+200 °C	Universal
PT1020-PT1000	PT1000	1000 Ω (0°C)	-50...+200 °C	Universal

CABLE TEMPERATURE SENSOR 0...350 °C, METAL HOUSING

Special cable sensor for high temperature.

Technical data	
Material, bulb	Stainless steel AISI 304 with ceramic insert
Material, cable	Fiberglass
Bulb length	100 mm
Cable length	2 m (3 wires)
Diameter	6 mm
Protection class	IP44
Precision	Class B



PT10xxC

Article	Sensor element	Nominal resistance	Temperature range	Compatible with
PT1020C-PT100	PT100	100 Ω (0°C)	0...350 °C	Universal
PT1020C-PT1000	PT1000	1000 Ω (0°C)	0...350 °C	Universal

SETPOINT DEVICE FOR PT1000

Setpoint device which gives resistance corresponding to the standard PT1000 table.

Technical data	
Temperature range	5...30 °C
Mounting	Panel mounting
Dimensions	60 x 60 x 38 mm
Protection class	IP20



SET-PT1000

Article	Description
SET-PT1000	Setpoint device
SET-30	Setpoint device for electric heating controllers CTR

HEAT-CONDUCTIVE PASTE

Article	Description
PASTA-20	Heat-conductive paste in tube, 20 g



PASTA-20

SENSOR CHARACTERISTICS

	PT100	PT1000	NTC 1,8K	NTC 2,2K	NTC 10K-01	NTC 10K-02	NTC 10K-03	NTC 15K-01	NTC 15K-02	NTC 15K-03	NTC 15K-04	NTC 20K	NI 1000-01	NI 1000-02
Equivalent			Tac	Johnson Controls	Aquatrol - Johnson Controls - Satchwell - Trend - Cylon - Honeywell	Carel - Evco - Eliwell - AB Industrietechnik	Andover - Delta Controls - Siebe - York	Regin - AB Industrietechnik	Regin - AB Industrietechnik	Regin - AB Industrietechnik	Regin - AB Industrietechnik	Honeywell	Siemens - Landis & Staefa	Sauter
Temp. °C	Ω	Ω	Ω	Ω	Ω	Ω	Ω	Ω	Ω	Ω	Ω	Ω	Ω	Ω
150	157,3	1573			186									
140	153,6	1536			235								1737	1909
130	149,8	1498			301								1675	1833
120	146,1	1461			390								1615	1760
110	142,3	1423	138	115	511	758	624					818	1557	1688
100	138,5	1385	177	153	679	973	817					1114	1500	1618
90	134,7	1347	230	206	916	1266	1084					1541	1444	1549
80	130,9	1309	303	283	1255	1668	1457					2166	1390	1483
70	127,1	1271	404	395	1752	2228	1990					3098	1337	1417
65	125,2	1252	469	469	2083	2588	2338					3732	1311	1385
60	123,2	1232	547	560	2488	3020	2760		10000			4518	1285	1353
55	121,3	1213	640	672	2986	3536	3270					5494	1260	1322
50	119,4	1194	753	811	3602	4160	3893		10830	10000		6718	1235	1291
45	117,5	1175	888	984	4368	4911	4655			10830		8260	1210	1260
40	115,5	1155	1052	1199	5324	5827	5594		11670	11670	10000	10212	1186	1230
35	113,6	1136	1252	1471	6532	6940	6754			12500	10625	12698	1162	1200
30	111,7	1117	1498	1814	8055	8313	8196	10000	12500	13330	11250	15886	1138	1171
29	111,3	1113	1553	1893	8406	8622	8525	10170				16627	1132	1165
28	111,0	1110	1611	1977	8779	8944	8869	10330				17407	1128	1159
27	110,5	1105	1671	2064	9165	9281	9229	10500				18227	1123	1153
26	110,1	1101	1734	2156	9574	9632	9606	10670				19090	1119	1147
25	109,7	1097	1800	2252	10000	10000	10000	10830		14170	11875	20000	1114	1141
24	109,3	1093	1868	2353	10448	10380	10413	11000				20958	1109	1136
23	109,0	1090	1940	2460	10924	10780	10845	11170				21968	1105	1130
22	108,6	1086	2015	2572	11421	11200	11298	11330				23033	1100	1124
21	108,2	1082	2092	2689	11940	11630	11773	11500				24156	1095	1118
20	107,8	1078	2174	2813	12491	12090	12270	11670	13330	15000	12500	25340	1091	1112
19	107,4	1074	2258	2944	13073	12560	12791	11830				26491	1086	1107
18	107,0	1070	2347	3081	13681	13060	13337	12000				27912	1081	1101
17	106,6	1066	2440	3226	14325	13580	13910	12170				29307	1077	1095
16	106,2	1062	2537	3378	15000	14120	14510	12330				30782	1072	1089
15	105,9	1059	2638	3538	15710	14690	15140	12500			13125	32340	1068	1084
14	105,5	1055	2744	3707	16461	15280	15801	12370				33982	1063	1078
13	105,1	1051	2854	3886	17256	15900	16494	12830				35716	1058	1072
12	104,7	1047	2972	4074	18091	16560	17222	13000				37550	1054	1067
11	104,3	1043	3093	4272	18970	17240	17987	13170				39489	1049	1061
10	103,9	1039	3222	4482	19902	17960	18790	13330	14170		13750	41540	1045	1056
9	103,5	1035	3354	4703	20884	18700	19633	13500				43715	1040	1050
8	103,1	1031	3493	4936	21918	19480	20519	13670				46018	1036	1044
7	102,7	1027	3639	5183	23015	20300	21451	13830				48457	1031	1039
6	102,3	1023	3791	5443	24170	21150	22430	14000				51041	1027	1033
5	101,9	1019	3951	5718	25391	22050	23460	14170			14375	53780	1022	1028
4	101,6	1016	4120	6009	26683	23000	24545	14330				56678	1018	1022
3	101,2	1012	4296	6317	28051	23990	25687	14500				59751	1013	1016
2	100,8	1008	4481	6643	29498	25030	26890	14670				63011	1009	1011
1	100,4	1004	4677	6988	31030	26130	28156	14830				66469	1004	1005
0	100,0	1000	4882	7353	32650	27280	29490	15000	15000		15000	70140	1000	1000
-5	98,0	980	6059	9532	42327	33900	37310					92220	978	973
-10	96,1	961	7580	12460	55329	42470	47540					122260	956	946
-15	94,1	941	9519	16430	72957	53410	61020					163480	935	919
-20	92,2	922	12061	21863	97083	67770	78910					220600	914	893
-25	90,2	902	15359	29371	130422	86430	102900					300400	893	867
-30	88,2	882	19747	39855	176976	111300	135200					413400	872	842
-35	86,3	863											851	816
-40	84,3	843											831	791

TEMPERATURE TRANSMITTER FOR ROOM MOUNTING, 0...10 V AND MODBUS

Technical data	
Supply voltage	24 V AC $\pm 10\%$ / 15...35 V DC
Power consumption	< 1 W
Temperature range	0...50 °C
Ambient temperature	0...50 °C
Ambient humidity	10...90 % UR (non-condensing)
Voltage range	0...11.5 V DC
Transformer power	≥ 2 VA
Mounting	Room
Display	4 digit
Dimensions	100 x 85 x 30.5 mm
Protection class	IP30
Isolation class	III

Article	Output signal	Accuracy	Display
TTA	0...10 V DC	$\pm 0.4^\circ\text{C}$	-
TTA-D	0...10 V DC	$\pm 0.4^\circ\text{C}$	X
TTA-M	Modbus	$\pm 0.2^\circ\text{C}$	-
TTA-D-M	Modbus	$\pm 0.2^\circ\text{C}$	X



TTA



TTA-D

TEMPERATURE TRANSMITTER FOR ROOM MOUNTING, 4...20 mA

Technical data	
Supply voltage	Max. 28 V DC, Min. $11 + (0.02 \times \text{RL})$ V DC
DC power	Min. 1 W
Temperature range	0...50 °C
Ambient temperature	0...50 °C
Ambient humidity	10...95 % RH
Power consumption	0.6 W
Accuracy, temperature	$\pm 0.5^\circ\text{C}$ at 20°C
Mounting	Room
Dimensions (WxHxD mm)	100 x 85 x 30.5
Protection class	IP30
Isolation class	III

Article	Output signal	Display
TTA-CD	4...20 mA (2 wires)	X (4 digits)
TTA-C	4...20mA (2 wires)	-



TTA-CD



TTA-C

TEMPERATURE TRANSMITTER FOR WALL MOUNTING, IP65

Technical data	
Power consumption	< 1 W
Ambient temperature	-20...+50 °C
Ambient humidity	10...95 % RH
Storage temperature	-20...+70 °C
Material, casing cover	White polycarbonate
Material, casing base	Grey polycarbonate
Weight	170 g
Dimensions	75 x 75 x 36 mm (housing)
Protection class	IP65 class III (sensor excluded)
Isolation class	III



TTE

Article	Temperature range	Output signal	Accuracy	Supply voltage
TTE011	0...50 °C	0...10 V DC	± 1°C	18...35 V DC / 18...24 V AC
TTE012	-30...+50 °C	0...10 V DC	± 1,5°C	18...35 V DC / 18...24 V AC
TTE013	0...100 °C	0...10 V DC	± 2°C	18...35 V DC / 18...24 V AC
TTE021	0...50 °C	4...20 mA (2 wires)	± 1°C	Max 30 V DC, Min 11+(0,02xRL) V DC
TTE022	-30...+50 °C	4...20 mA (2 wires)	± 1,5°C	Max 30 V DC, Min 11+(0,02xRL) V DC
TTE023	0...100 °C	4...20 mA (2 wires)	± 2°C	Max 30 V DC, Min 11+(0,02xRL) V DC

5

TEMPERATURE TRANSMITTER FOR AIR DUCT MOUNTING, IP65

Technical data	
Power consumption	< 1 W
Temperature range sensor	-20...+80 °C
Insertion length	60...230 mm
Ambient temperature	0...50 °C
Ambient humidity	10...95 % RH (non-condensing)
Storage temperature	-20...+70 °C
Material, casing cover	White polycarbonate
Material, casing base	Grey polycarbonate
Weight	260 g
Dimensions	75 x 75 x 36 mm (housing)
Protection class	IP65 (sensor excluded)
Isolation class	III



TTC

Article	Temperature range	Output signal	Accuracy	Supply voltage
TTC011	0...50 °C	0...10 V DC	± 1°C	18...35 V DC / 18...24 V AC
TTC012	-30...+50 °C	0...10 V DC	± 1,5°C	18...35 V DC / 18...24 V AC
TTC013	0...100 °C	0...10 V DC	± 2°C	18...35 V DC / 18...24 V AC
TTC021	0...50 °C	4...20 mA (2 wires)	± 1°C	Max 30 V DC, Min (11+(0,02xRL)) V DC
TTC022	-30...+50 °C	4...20 mA (2 wires)	± 1,5°C	Max 30 V DC, Min (11+(0,02xRL)) V DC
TTC023	0...100 °C	4...20 mA (2 wires)	± 2°C	Max 30 V DC, Min (11+(0,02xRL)) V DC

Article	Description
DBZ-22	Mounting bracket for air duct transmitters



DBZ-22



The transmitter is supplied with mounting bracketed model DBZ-22

TEMPERATURE TRANSMITTER FOR IMMERSION MOUNTING, IP65



TTI

Technical data	
Power consumption	< 1 W
Temperature range sensor	-20...+100 °C
Insertion length	120 mm
Ambient temperature	0...50 °C
Ambient humidity	10...95 % RH (non-condensing)
Storage temperature	-20...+70 °C
Material, casing cover	White polycarbonate
Material, casing base	Grey polycarbonate
Weight	310
Dimensions	75 x 75 x 36 mm (housing)
Protection class	IP65 (sensor excluded)
Isolation class	III

Article	Temperature range	Output signal	Accuracy	Supply voltage
TTI011	0...50 °C	0...10 V DC	± 1°C	18...35 V DC / 18...24 V AC
TTI012	-30...+50 °C	0...10 V DC	± 1,5°C	18...35 V DC / 18...24 V AC
TTI013	0...100 °C	0...10 V DC	± 2°C	18...35 V DC / 18...24 V AC
TTI021	0...50 °C	4...20 mA (2 wires)	± 1°C	Max 30 V DC, Min (11+(0,02xRL)) V DC
TTI022	-30...+50 °C	4...20 mA (2 wires)	± 1,5°C	Max 30 V DC, Min (11+(0,02xRL)) V DC
TTI023	0...100 °C	4...20 mA (2 wires)	± 2°C	Max 30 V DC, Min (11+(0,02xRL)) V DC

CO₂, CO, VOC transmitters

CO₂ TRANSMITTER, ROOM MOUNTING

This series with automatic calibration sets new standards in CO₂ measurement for HVAC applications. It combines the measurement of the carbon dioxide level, temperature and relative humidity. Models with or without display are available.

Technical data	
Supply voltage	24 V AC ±10 %, 50...60 Hz / 15...35 V DC
Working range, CO ₂	0...2000 ppm
Working range, temperature	0...50 °C
Working range, humidity	10...90 % RH (non-condensing)
Power consumption	< 2.5 W
Energy consumption	< 0.5 Wh
Transformer power	≥ 5 VA
Accuracy, CO ₂	< ± (50 ppm + 2 % of the measured value) (25 °C)
Accuracy, humidity	±3 % RH (20°C)
Relay output	Max. 1 A at 50 V AC, min. 1 mA at 5 V DC
Mounting	Room
Dimensions	100 x 85 x 30.5 mm
Protection class	IP30
Outputs	
CO ₂	0...10 V DC referring to 0...2000 ppm
Temperature	0...10 V DC referring to 0...50 °C or resistive outputs
Humidity	0...10 V DC referring to 0...100 % RH



TCO2A



TCO2A-D

Article	Description	Display	Output signal	Accuracy, temperature
TCO2A	CO ₂ + °C	-	0...10 V + 0...10 V	± 0.4 °C
TCO2A-D	CO ₂ + °C	X	0...10 V + 0...10 V	± 0.4 °C
TCO2A-PT100	CO ₂ + PT100, 100 Ohm (0°C)	-	0...10 V + ohm	± 0.3 °C
TCO2A-PT1000	CO ₂ + PT1000, 1000 Ohm (0°C)	-	0...10 V + ohm	± 0.3 °C
TCO2A-NTC1.8	CO ₂ + NTC 1.8, 1800 Ohm (25°C)	-	0...10 V + ohm	± 0.5 °C
TCO2A-NTC2.2	CO ₂ + NTC 2.2, 2252 Ohm (25°C)	-	0...10 V + ohm	± 0.2 °C
TCO2A-NTC10-01	CO ₂ + NTC 10, 10 kOhm (25°C)	-	0...10 V + ohm	± 0.2 °C
TCO2A-NTC10-02	CO ₂ + NTC 10, 10 kOhm (25°C)	-	0...10 V + ohm	± 0.3 °C
TCO2A-NTC10-03	CO ₂ + NTC 10, 10 kOhm (25°C)	-	0...10 V + ohm	± 0.25 °C
TCO2A-NTC20	CO ₂ + NTC 20, 20 kOhm (25°C)	-	0...10 V + ohm	± 0.2 °C
TCO2A-NI1000-01	CO ₂ + Ni1000, 1000 Ohm (0°C)	-	0...10 V + ohm	± 0.5 °C
TCO2A-NI1000-02	CO ₂ + Ni1000, 1000 Ohm (0°C)	-	0...10 V + ohm	± 0.5 °C
TCO2A-D-PT100	CO ₂ + PT100, 100 Ohm (0°C)	X	0...10 V + ohm	± 0.3 °C
TCO2A-D-PT1000	CO ₂ + PT1000, 1000 Ohm (0°C)	X	0...10 V + ohm	± 0.3 °C
TCO2A-D-NTC1.8	CO ₂ + NTC 1.8, 1800 Ohm (25°C)	X	0...10 V + ohm	± 0.5 °C
TCO2A-D-NTC2.2	CO ₂ + NTC 2.2, 2252 Ohm (25°C)	X	0...10 V + ohm	± 0.2 °C
TCO2A-D-NTC10-01	CO ₂ + NTC 10, 10 kOhm (25°C)	X	0...10 V + ohm	± 0.2 °C
TCO2A-D-NTC10-02	CO ₂ + NTC 10, 10 kOhm (25°C)	X	0...10 V + ohm	± 0.3 °C
TCO2A-D-NTC10-03	CO ₂ + NTC 10, 10 kOhm (25°C)	X	0...10 V + ohm	± 0.25 °C
TCO2A-D-NTC20	CO ₂ + NTC 20, 20 kOhm (25°C)	X	0...10 V + ohm	± 0.2 °C
TCO2A-D-NI1000-01	CO ₂ + Ni1000, 1000 Ohm (0°C)	X	0...10 V + ohm	± 0.5 °C
TCO2A-D-NI1000-02	CO ₂ + Ni1000, 1000 Ohm (0°C)	X	0...10 V + ohm	± 0.5 °C
TCO2A-M	CO ₂ + °C	-	Modbus	± 0.2 °C
TCO2A-D-M	CO ₂ + °C	X	Modbus	± 0.2 °C
TCO2AU	CO ₂ + °C + RH	-	0...10 V + 0...10 V + 0...10 V	± 0.4 °C
TCO2AU-PT100	CO ₂ + RH + PT100, 100 Ohm (0°C)	-	0...10 V + 0...10 V + ohm	± 0.3 °C
TCO2AU-PT1000	CO ₂ + RH + PT1000, 1000 Ohm (0°C)	-	0...10 V + 0...10 V + ohm	± 0.3 °C
TCO2AU-NTC1.8	CO ₂ + RH + NTC 1.8, 1800 Ohm (25°C)	-	0...10 V + 0...10 V + ohm	± 0.5 °C
TCO2AU-NTC2.2	CO ₂ + RH + NTC 2.2, 2252 Ohm (25°C)	-	0...10 V + 0...10 V + ohm	± 0.2 °C
TCO2AU-NTC10-01	CO ₂ + RH + NTC 10, 10 kOhm (25°C)	-	0...10 V + 0...10 V + ohm	± 0.2 °C
TCO2AU-NTC10-02	CO ₂ + RH + NTC 10, 10 kOhm (25°C)	-	0...10 V + 0...10 V + ohm	± 0.3 °C
TCO2AU-NTC10-03	CO ₂ + RH + NTC 10, 10 kOhm (25°C)	-	0...10 V + 0...10 V + ohm	± 0.25 °C
TCO2AU-NTC20	CO ₂ + RH + NTC 20, 20 kOhm (25°C)	-	0...10 V + 0...10 V + ohm	± 0.2 °C
TCO2AU-NI1000-01	CO ₂ + RH + Ni1000, 1000 Ohm (0°C)	-	0...10 V + 0...10 V + ohm	± 0.5 °C
TCO2AU-NI1000-02	CO ₂ + RH + Ni1000, 1000 Ohm (0°C)	-	0...10 V + 0...10 V + ohm	± 0.5 °C
TCO2AU-D	CO ₂ + °C + RH	X	0...10 V + 0...10 V + 0...10 V	± 0.4 °C
TCO2AU-D-PT100	CO ₂ + RH + PT100, 100 Ohm (0°C)	X	0...10 V + 0...10 V + ohm	± 0.3 °C
TCO2AU-D-PT1000	CO ₂ + °C + RH	X	0...10 V + 0...10 V + ohm	± 0.3 °C
TCO2AU-D-NTC1.8	CO ₂ + RH + NTC 1.8, 1800 Ohm (25°C)	X	0...10 V + 0...10 V + ohm	± 0.5 °C
TCO2AU-D-NTC2.2	CO ₂ + RH + NTC 2.2, 2252 Ohm (25°C)	X	0...10 V + 0...10 V + ohm	± 0.2 °C
TCO2AU-D-NTC10-01	CO ₂ + RH + NTC 10, 10 kOhm (25°C)	X	0...10 V + 0...10 V + ohm	± 0.2 °C
TCO2AU-D-NTC10-02	CO ₂ + RH + NTC 10, 10 kOhm (25°C)	X	0...10 V + 0...10 V + ohm	± 0.3 °C
TCO2AU-D-NTC10-03	CO ₂ + RH + NTC 10, 10 kOhm (25°C)	X	0...10 V + 0...10 V + ohm	± 0.25 °C
TCO2AU-D-NTC20	CO ₂ + RH + NTC 20, 20 kOhm (25°C)	X	0...10 V + 0...10 V + ohm	± 0.2 °C
TCO2AU-D-NI1000-01	CO ₂ + RH + Ni1000, 1000 Ohm (0°C)	X	0...10 V + 0...10 V + ohm	± 0.5 °C
TCO2AU-D-NI1000-02	CO ₂ + RH + Ni1000, 1000 Ohm (0°C)	X	0...10 V + 0...10 V + ohm	± 0.5 °C
TCO2AU-M	CO ₂ + RH + °C	-	Modbus	± 0.2 °C
TCO2AU-D-M	CO ₂ + RH + °C	X	Modbus	± 0.2 °C

CO₂ TRANSMITTER, AIR DUCT MOUNTING

Measures the concentration of carbon dioxide in ducts. Exempt from periodic calibration. Some models are equipped with a passive temperature sensor.



TCO2C

Technical data	
Supply voltage	15...35 V DC / 24 V AC ± 10% 50-60 Hz
CO ₂ sensor	NDIR (Non-Dispersive Infrared Technology)
Output	0...10 V DC or 0...5 V DC, RL>10 kOhm
Working range, CO ₂	0...2000 ppm
Working range, temperature	0...+50 °C
Working range, humidity	10...90 % RH (non-condensing)
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Accuracy, CO ₂	±(50 ppm +2% of the measured value)
Power consumption	< 2.5 W
Energy consumption	< 0.5 Wh
Transformer power	≥ 5 VA
Max. air velocity	10 m/s
Mounting	Duct
Material, casing cover	White polycarbonate
Material, casing base	Grey polycarbonate
Insertion length	60...230 mm
Weight	160 g
Dimensions	75 x 77 x 36 mm (housing)
Protection class	IP65 case (sensor excluded)
Isolation class	III
Outputs	
CO ₂	0...10 V DC referring to 0...2000 ppm
Temperature	passive sensor °C

Article	Description	Output signal	Accuracy, temperature
TCO2C	CO ₂	0...10 V	-
TCO2C-05	CO ₂	0...5 V	-
TCO2C-PT100	CO ₂ + PT100, 100 Ohm (0°C)	0...10 V + Ohm	± 0.3
TCO2C-PT1000	CO ₂ + PT1000, 1000 Ohm (0°C)	0...10 V + Ohm	± 0.3
TCO2C-NTC1.8	CO ₂ + NTC 1.8, 1800 Ohm (25°C)	0...10 V / Ohm	± 0.5
TCO2C-NTC2.2	CO ₂ + NTC 2.2, 2252 Ohm (25°C)	0...10 V + Ohm	± 0.2
TCO2C-NTC10-01	CO ₂ + NTC 10, 10 kOhm (25°C)	0...10 V + Ohm	± 0.2
TCO2C-NTC10-02	CO ₂ + NTC 10, 10 kOhm (25°C)	0...10 V + Ohm	± 0.3
TCO2C-NTC10-03	CO ₂ + NTC 10, 10 kOhm (25°C)	0...10 V + Ohm	± 0.25
TCO2C-NTC20	CO ₂ + NTC 20, 20 kOhm (25°C)	0...10 V + Ohm	± 0.2
TCO2C-NI1000-01	CO ₂ + Ni1000, 1000 Ohm (0°C)	0...10 V + Ohm	± 0.5
TCO2C-NI1000-02	CO ₂ + Ni1000, 1000 Ohm (0°C)	0...10 V + Ohm	± 0.5

ACCESSORIES

Article	Description
DBZ-22	Mounting bracket for air duct transmitters



Note: the transmitter is supplied with mounting bracket model DBZ-22.



DBZ-22

CARBON MONOXIDE TRANSMITTER

This device measures the carbon monoxide concentration using an electrochemical method of measurement characterised by high selectivity even in low concentrations. It is installed for both safety and energy-saving reasons. The output signals are linear representations of the gas concentration.

The transmitter is TÜV-approved in accordance with VDI 2053.



TC01

Technical data	
Supply voltage	12...28 V DC
Measuring range	0...300 ppm
Outputs	4...20 mA, two-wire / 0...10 V DC, three-wire
Calibration	Automatic zero adjustment
Dimensions	80 x 82 x 86 mm
Protection class	IP56

Article	Description
TC01	CO transmitter

ROOM AIR QUALITY TRANSMITTERS, VOC

Analysis of the air quality based on a mixed gas VOC (Volatile Organic Compounds) sensor.

Detectable gases:

- carbon monoxide CO
- hydrogen sulfide H₂S
- solvent vapours
- cigarette smoke
- car exhaust
- air produced by human breathing
- combustion smoke from wood, paper and plastics.



DB-RLQ

Technical data	
Supply voltage	15...36 V DC or 24 V AC/DC ± 10%, 50-60 Hz
Outputs	0...10 V DC, 0...20 mA or 4...20 mA, selectable by jumpers
Sensor	VOC
Ambient temperature	0...50 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-20...+50 °C
Storage humidity	< 95 % RH
Casing	Plastic material similar to RAL 9010
Weight	80 g
Dimensions	75 x 75 x 25 mm
Protection class	IP30 (case)
Isolation class	III
Certification	EN 60335-1: safety / EN 60529: IP degree of protection / EN 60730: domestic controls

Article	Output	Application
DB-RLQ	0...10 V DC, 0...20 mA, 4...20 mA	Room
DB-RLQ5	0...5 V DC, 0...20 mA, 4...20 mA	Room

DUCT AIR QUALITY TRANSMITTERS, VOC

Analysis of the air quality based on a mixed gas VOC (Volatile Organic Compounds) sensor.

Detectable gases:

- carbon monoxide CO
- hydrogen sulfide H₂S
- solvent vapours
- cigarette smoke
- car exhaust
- air produced by human breathing
- combustion smoke from wood, paper and plastics.



DB-KLQ

Technical data	
Supply voltage	15...36 V DC or 24 V AC/DC ± 10%, 50-60 Hz
Outputs	0...10 V DC, 0...20 mA or 4...20 mA, selectable by dip-switch
Sensor	VOC
Ambient temperature	0...50 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-20...+50 °C
Storage humidity	< 95 % RH
Casing	Plastic material similar to RAL 9010
Weight	80 g
Dimensions	65 x 59 x 36 mm (tube L = 206 mm, diameter = 16 mm)
Protection class	IP30 (case)
Isolation class	III
Certification	EN 60335-1: safety / EN 60529: IP degree of protection / EN 60730: domestic controls

Article	Output	Application
DB-KLQ	0...10 V DC, 0...20 mA, 4...20 mA	Duct
DB-KLQ5	0...5 V DC, 0...20 mA, 4...20 mA	Duct

Humidity transmitters and humidistats

ROOM HUMIDISTAT

Electromechanical humidistat with a synthetic element. The setpoint knob can be locked.



DBZH-102

Technical data	
Sensor element	Synthetic element
Output	1, 230 V AC, 5 A, change-over
Setpoint	35...95 % RH
Hysteresis	7 % RH
Mounting	Room
Dimensions	86 x 86 x 30 mm
Protection class	IP30

Article	Description
DBZH-102	Room humidistat, 1-step

DUCT HUMIDISTAT

Humidistat to be mounted in the duct.



DBKH-10

Technical data	
Sensor element	Synthetic element
Contact	Microswitches with SPDT contacts
Switch capacity	15 (2) A, 230 V AC 0.25 A, 230 V DC
Humidity range	30...100 % RH
Hysteresis	4...50 RH
Max. air velocity	8 m/s
Ambient temperature	0...60 °C °C
Ambient humidity	< 95 % RH (non-condensing)
Storage temperature	-30...+60 °C
Storage humidity	< 95 % RH (In the case of voltage below 48 V, the humidistat can be used up to 100% RH)
Tube length	220 mm
Material, tube	Nickel-plated brass, perforated
Casing	ABS
Weight	480 g
Dimensions	108 x 70 x 72 mm

Article	Hidden setpoint	Protection class
DBKH-10	-	IP54
DBKH-10U	X	IP65

DUCT/WALL HUMIDISTAT

Electromechanical humidistat with change-over contact.

Technical data	
Sensor element	Human hair
Output	10 A, 250 V AC, change-over
Setpoint	10...100 % RH
Hysteresis	3 % RH
Mounting	Duct or wall
Dimensions	80 x 85 x 88 mm
Protection class	IP54
Isolation class	I



DBKH-10H

Article	Description	Output	Step differential
DBKH-10H	Duct/wall humidistat	1-step	-
DBKH-20H	Duct/wall humidistat	2-step	0...25 % RH

HUMIDITY TRANSMITTER FOR ROOM MOUNTING, OUTPUT 0...10 V, IP30

Transmitters for relative humidity and temperature measurement. They have good long-term stability and are resistant to contamination.

Technical data	
Supply voltage	24 V AC $\pm$ 10% / 15...35 V DC
Power consumption	< 1W
Transformer power	$\geq$ 2 VA
Output signal	0...10 V DC or Modbus
Ambient temperature	0...50 °C
Ambient humidity	0...95%
Working range, temperature	0...50 °C
Working range, humidity	0...100 % RH
Accuracy, humidity	$\pm$ 3 % RH at 20 °C
Mounting	Room
Dimensions	100 x 85 x 30.5 mm
Protection class	IP30
Isolation class	III

Article	Output signal	Display
TUA-M	Modbus	-
TUA-D-M	Modbus	X
TUA	0...10 V DC	-
TUA-D	0...10 V DC	X



TUA



TUA-D

HUMIDITY TRANSMITTER FOR ROOM MOUNTING, OUTPUT 4...20 mA, IP30

Technical data	
Supply voltage	Max 28 V DC, Min (11+(0,02xRL)) V DC
Output signal	4...20 mA (2 wire)
Power consumption	0,6 W
Ambient temperature	0...50 °C
Ambient humidity	0...95% RH (non condensing)
Transformer power	>=1 W
Working range, humidity	0...100 % RH (non condensing)
Accuracy, humidity	±3 % RH at 20 °C
Mounting	Room
Dimensions	100 x 85 x 30.5 mm
Protection class	IP30
Isolation class	III

Article	Display
TUA-C	-
TUA-CD	X



TUA-C



TUA-CD

HUMIDITY AND TEMPERATURE TRANSMITTER FOR ROOM MOUNTING, 4...20 mA

Technical data	
Supply voltage	Max. 28 V DC, Min. 11+(0.02xRL) V DC
Output signal	4...20 mA (2 wire)
Power consumption	1.2 W
Temperature range	0...50 °C
Ambient temperature	0...50 °C
Ambient humidity	0...95 % RH (non-condensing)
Humidity range	0...100 % RH
Transformer power	Min. 2 W
Accuracy, humidity	±3% RH at 20 °C
Accuracy, temperature	±0.5°C at 20°C
Mounting	Room
Dimensions (WxHxD mm)	100 x 85 x 30.5
Protection class	IP30
Isolation class	III

Article	Display
TTUA-C	-
TTUA-CD	X



TTUA-C



TTUA-CD

HUMIDITY AND TEMPERATURE TRANSMITTER FOR ROOM MOUNTING, IP30

Transmitter for relative humidity and temperature measurement. It has good long-term stability and is resistant to contamination.

Technical data

Supply voltage	24 V AC $\pm 10\%$ / 15...35 V DC
Power consumption	< 1 W
Transformer power	≥ 2 VA
Working range, temperature	0...50 °C
Working range, humidity	0...100 % RH
Accuracy, humidity	$\pm 3\%$ RH at 20°C
Mounting	Room
Dimensions	100 x 85 x 30.5 mm
Protection class	IP30



TTUA



TTUA-D

Article	Description	Display	Output signal	Accuracy, temperature
TTUA	RH + °C	-	0...10 V + 0...10 V	± 0.4 °C
TTUA-PT100	RH + PT100, 100 Ohm (0°C)	-	0...10 V + ohm	± 0.3 °C
TTUA-PT1000	RH + PT1000, 1000 Ohm (0°C)	-	0...10 V + ohm	± 0.3 °C
TTUA-NTC1.8	RH + NTC 1.8, 1800 Ohm/25°C	-	0...10 V + ohm	± 0.5 °C
TTUA-NTC2.2	RH + NTC 2.2, 2252 Ohm/25°C	-	0...10 V + ohm	± 0.2 °C
TTUA-NTC10-01	RH + NTC 10, 10 kOhm/25°C	-	0...10 V + ohm	± 0.2 °C
TTUA-NTC10-02	RH + NTC 10, 10 kOhm/25°C	-	0...10 V + ohm	± 0.3 °C
TTUA-NTC10-03	RH + NTC 10, 10 kOhm/25°C	-	0...10 V + ohm	± 0.25 °C
TTUA-NTC20	RH + NTC 20, 20 kOhm/25°C	-	0...10 V + ohm	± 0.2 °C
TTUA-NI1000-01	RH + Ni1000, 1000 Ohm/0°C	-	0...10 V + ohm	± 0.5 °C
TTUA-NI1000-02	RH + Ni1000, 1000 Ohm/0°C	-	0...10 V + ohm	± 0.5 °C
TTUA-D	RH + °C	X	0...10 V + 0...10 V	± 0.4 °C
TTUA-D-PT100	RH + PT100, 100 Ohm/0°C	X	0...10 V + ohm	± 0.3 °C
TTUA-D-PT1000	RH + PT1000, 1000 Ohm (0°C)	X	0...10 V + ohm	± 0.3 °C
TTUA-D-NTC1.8	RH + NTC 1.8, 1800 Ohm/25°C	X	0...10 V + ohm	± 0.5 °C
TTUA-D-NTC2.2	RH + NTC 2.2, 2252 Ohm/25°C	X	0...10 V + ohm	± 0.2 °C
TTUA-D-NTC10-01	RH + NTC 10, 10 kOhm/25°C	X	0...10 V + ohm	± 0.2 °C
TTUA-D-NTC10-02	RH + NTC 10, 10 kOhm/25°C	X	0...10 V + ohm	± 0.3 °C
TTUA-D-NTC10-03	RH + NTC 10, 10 kOhm/25°C	X	0...10 V + ohm	± 0.25 °C
TTUA-D-NTC20	RH + NTC 20, 20 kOhm/25°C	X	0...10 V + ohm	± 0.2 °C
TTUA-D-NI1000-01	RH + Ni1000, 1000 Ohm/0°C	X	0...10 V + ohm	± 0.5 °C
TTUA-D-NI1000-02	RH + Ni1000, 1000 Ohm/0°C	X	0...10 V + ohm	± 0.5 °C
TTUA-M	RH + °C	-	Modbus	± 0.2 °C
TTUA-D-M	RH + °C	X	Modbus	± 0.2 °C

WALL HUMIDITY TRANSMITTER, IP65



TUE

Technical data	
Supply voltage, 0...10 V DC	18...24 V AC / 18...35 V DC
Supply voltage, 4...20 mA	Max 30 V DC, Min (11+(0,02xRL)) V DC
Power consumption	< 1 W
Transformer power	≥ 2 VA
Ambient humidity	10...95 % RH (non-condensing)
Ambient temperature	- 5...+ 50 °C
Storage temperature	-20...+70 °C
Accuracy	±3 % RH at 20 °C
Temperature dependence of electronics	Output 4...20 mA: 0.015 °C/°C
Material, casing cover	White polycarbonate
Material, casing base	Grey polycarbonate
Weight	170 g
Dimensions	75 x 172 x 36 mm
Protection class	IP65 (sensor excluded)
Isolation class	III

Article	Supply voltage	Load limits	Output signal
TUE1	18...24 V AC / 18...35 V DC	RL < 1000 Ohm	0...10 V DC
TUE2	11...30 V DC	V+ - (0.02 x RL) ≥ 11 V]	4...20 mA
TUE3	18...24 V AC / 18...35 V DC	RL < 1000 Ohm	0...5 V DC

WALL HUMIDITY/TEMPERATURE TRANSMITTER, IP65

Technical data	
Power consumption	< 1 W
Ambient humidity	10...95 % RH (non-condensing)
Storage temperature	-20...+70 °C
Ambient temperature	0...50 °C
Accuracy, humidity	± 3% RH at 20 °C
Material, casing cover	White polycarbonate
Material, casing base	Grey polycarbonate
Weight	170 g
Dimensions	75 x 172 x 36 mm
Protection class	IP65 (sensor excluded)
Isolation class	III



TUTE

Article	Supply voltage	Temperature range	Output, temperature	Output, humidity	Accuracy, temperature
TUTE0111	18...24 V AC / 18...35 V DC	0...+50 °C	0...10 V DC	0...10 V DC	± 1°C
TUTE0121	18...24 V AC / 18...35 V DC	-30...+50 °C	0...10 V DC	0...10 V DC	± 1.5°C
TUTE0131	18...24 V AC / 18...35 V DC	0...+100 °C	0...10 V DC	0...10 V DC	± 2°C
TUTE0212	Max 30 V DC, Min 11+(0,02xRL) V DC	0...+50 °C	4...20 mA	4...20 mA	± 1°C
TUTE0222	Max 30 V DC, Min 11+(0,02xRL) V DC	-30...+50 °C	4...20 mA	4...20 mA	± 1.5°C
TUTE0232	Max 30 V DC, Min 11+(0,02xRL) V DC	0...+100 °C	4...20 mA	4...20 mA	± 2°C
TUTE1101	18...24 V AC / 18...35 V DC	-5...+50 °C	NTC 10K-02	0...10 V DC	± 0.6°C
TUTE1102	Max 30 V DC, Min 11+(0,02xRL) V DC	-5...+50 °C	NTC 10K-02	4...20 mA	± 0.6°C
TUTE1103	18...24 V AC / 18...35 V DC	-5...+50 °C	NTC 10K-02	0...5 V DC	± 0.6°C
TUTE1301	18...24 V AC / 18...35 V DC	-5...+50 °C	NTC 1K8	0...10 V DC	± 0.6°C
TUTE1302	Max 30 V DC, Min 11+(0,02xRL) V DC	-5...+50 °C	NTC 1K8	4...20 mA	± 0.6°C
TUTE1401	18...24 V AC / 18...35 V DC	-5...+50 °C	NTC 10K-01	0...10 V DC	± 0.2°C
TUTE1402	Max 30 V DC, Min 11+(0,02xRL) V DC	-5...+50 °C	NTC 10K-01	4...20 mA	± 0.2°C
TUTE1501	18...24 V AC / 18...35 V DC	-5...+50 °C	NTC 10K-03	0...10 V DC	± 0.2°C
TUTE1502	Max 30 V DC, Min 11+(0,02xRL) V DC	-5...+50 °C	NTC 10K-03	4...20 mA	± 0.2°C
TUTE1601	18...24 V AC / 18...35 V DC	-5...+50 °C	NTC 20K	0...10 V DC	± 0.6°C
TUTE1602	Max 30 V DC, Min 11+(0,02xRL) V DC	-5...+50 °C	NTC 20K	4...20 mA	± 0.6°C
TUTE1701	18...24 V AC / 18...35 V DC	-5...+50 °C	PT1000	0...10 V DC	± 0.6°C
TUTE2101	18...24 V AC / 18...35 V DC	-5...+50 °C	PT100	0...10 V DC	± 0.3°C
TUTE2102	Max 30 V DC, Min 11+(0,02xRL) V DC	-5...+50 °C	PT100	4...20 mA	± 0.3°C

DUCT HUMIDITY TRANSMITTER

Technical data

Supply voltage, 0...10 V DC	18...24 V AC / 18...35 V DC
Supply voltage, 4...20 mA	Max 30 V DC, Min (11+(0,02xRL)) V DC
Power consumption	< 1 W
Sensor	Capacitive
Ambient temperature	-5...+50 °C
Ambient humidity	10...95 % RH (non-condensing)
Storage temperature	-20...+70 °C
Accuracy	±3 % RH at 20 °C
Casing	Cover: white polycarbonate Base: grey polycarbonate
Weight	260 g
Dimensions	75 x 103 x 266 mm
Protection class	IP65
Isolation class	III



TUC

Article	Humidity range	Output signal
TUC1	0...100 % RH	0...10 V DC
TUC2	0...100 % RH	4...20 mA (2 wires)
TUC3	0...100 % RH	0...5 V DC

ACCESSORY

Article	Description
DBZ-22	Mounting bracket for air duct transmitters



These transmitters are supplied with mounting bracket model DBZ-22.



DBZ-22

DUCT HUMIDITY/TEMPERATURE TRANSMITTER

Technical data	
Power consumption	< 1 W
Sensor	Temperature: resistive ; humidity: capacitive
Ambient humidity	10...95 % RH (non-condensing)
Ambient temperature	-5...+50 °C
Humidity range	0...100 % RH (non condensing)
Storage temperature	-20...+70 °C
Accuracy	Humidity: ± 3% RH at 20 °C Temperature: Max error 1 °C (range 0...50 °C) Max error 1.5 °C (range -30...+50 °C) Max error 2 °C (range 0...100 °C)
Casing	Cover: white polycarbonate Base: grey polycarbonate
Weight	260 g
Dimensions	75 x 103 x 266 mm
Protection class	IP65 (sensor excluded)
Isolation class	III



TUTC

Article	Supply voltage	Temperature range	Output, temperature	Output, humidity
TUTC0111	18...24 V AC / 18...35 V DC	0...+50 °C	0...10 V DC	0...10 V DC
TUTC0121	18...24 V AC / 18...35 V DC	-30...+50 °C	0...10 V DC	0...10 V DC
TUTC0131	18...24 V AC / 18...35 V DC	0...+100 °C	0...10 V DC	0...10 V DC
TUTC0212	Max 30 V DC, Min 11+(0,02xRL) V DC	0...+50 °C	4...20 mA	4...20 mA
TUTC0222	Max 30 V DC, Min 11+(0,02xRL) V DC	-30...+50 °C	4...20 mA	4...20 mA
TUTC0232	Max 30 V DC, Min 11+(0,02xRL) V DC	0...+100 °C	4...20 mA	4...20 mA
TUTC1101	18...24 V AC / 18...35 V DC	-5...+50 °C	NTC 10K-02	0...10 V DC
TUTC1102	Max 30 V DC, Min 11+(0,02xRL) V DC	-5...+50 °C	NTC 10K-02	4...20 mA
TUTC1103	18...24 V AC / 18...35 V DC	-5...+50 °C	NTC 10K-02	0...5 V DC
TUTC1301	18...24 V AC / 18...35 V DC	-5...+50 °C	NTC 1K8	0...10 V DC
TUTC1302	Max 30 V DC, Min 11+(0,02xRL) V DC	-5...+50 °C	NTC 1K8	4...20 mA
TUTC1401	18...24 V AC / 18...35 V DC	-5...+50 °C	NTC 10K-01	0...10 V DC
TUTC1402	Max 30 V DC, Min 11+(0,02xRL) V DC	-5...+50 °C	NTC 10K-01	4...20 mA
TUTC1501	18...24 V AC / 18...35 V DC	-5...+50 °C	NTC 10K-03	0...10 V DC
TUTC1502	Max 30 V DC, Min 11+(0,02xRL) V DC	-5...+50 °C	NTC 10K-03	4...20 mA
TUTC1601	18...24 V AC / 18...35 V DC	-5...+50 °C	NTC 20K	0...10 V DC
TUTC1602	Max 30 V DC, Min 11+(0,02xRL) V DC	-5...+50 °C	NTC 20K	4...20 mA
TUTC1701	18...24 V AC / 18...35 V DC	-5...+50 °C	PT1000	0...10 V DC
TUTC2101	18...24 V AC / 18...35 V DC	-5...+50 °C	PT100	0...10 V DC
TUTC2102	Max 30 V DC, Min 11+(0,02xRL) V DC	-5...+50 °C	PT100	4...20 mA

ACCESSORY

Article	Description
DBZ-22	Mounting bracket for air duct transmitters



These transmitters are supplied with mounting bracket model DBZ-22.

Flow, air and liquid switches and transmitters

LIQUID FLOW SWITCHES

Switches for liquid flow control.

Well-suited for:

- heating and air conditioning systems
- refrigeration systems.



DB25MI

Technical data	
Media	Water, Water max. 50% glycol
Contacts	Microswitch with SPDT contacts
Switch capacity	5 A, 250 V AC
Media temperature	-20...+110 °C
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH
Max. pressure	2500 kPa = 25 bar
Pressure loss at Q _{max}	1 kPa = 0.01 bar
Tolerance	± 15 % end of scale
Hysteresis	Min. 0.7 l/min
Plug	Internally threaded connector DIN 43650-A
Casing	ABS V0
Body	Brass
Paddles	Stainless steel
Packing	NBR
Weight	300...990 g
Dimensions	102 x 30 x 83...104 mm
Protection class	IP65
Isolation class	II

Article	Connection	Setting range	Max. recommended flow (l/min)
DB10MI	3/8"	5 - 6 l/min (H ₂ O)	10 l/min (H ₂ O)
DB15MI	1/2"	6 - 7 l/min	20 l/min
DB20MI	3/4"	7.5 - 11 l/min	40 l/min
DB20MI/1	3/4"	13 - 16 l/min	40 l/min
DB25MI	1"	19 - 24 l/min	60 l/min
DB32MI	1 1/4"	30 - 50 l/min	80 l/min
DB40MI	1 1/2"	50 - 60 l/min	100 l/min
DB50MI	2"	70 - 90 l/min	150 l/min



The indicated values have been measured with the flow switch mounted horizontally.

LIQUID FLOW SWITCH

Electromechanical flow switches, suited for pipes of industrial plants: heating and air conditioning, refrigeration systems and heat pumps. Available in brass (suitable for normal media), and stainless steel AISI 316L (compatible with certain aggressive media).

Technical data	
Media	Water, Water max. 50% glycol
Contacts	Microswitch with switching contacts SPDT
Switch capacity	15 (8) A, 24...250 V AC
Ambient temperature	-40...+85 °C
Ambient humidity	10...90 % RH (non-condensing)
Media temperature	-40...+120 °C
Storage temperature	-40...+85 °C
Storage humidity	< 95 % RH
Connection	Standard R1" (DIN 2999) for series SF1 and SF2
Material, casing cover	Transparent Polycarbonate (PC)
Material, casing base	ABS
Paddles	Stainless steel AISI 316L
Weight	950 g
Dimensions	140 x 62 x 65 mm
Protection class	IP65
Isolation class	I

Article	For pipes (diameter)	Flow	Media	"T" pipe fitting	Max. pressure
SF1K	1...8"	0.6...90.8 m³/h	Normal (body in brass)	-	1100 kPa (11 bar)
SF1E	1...8"	0.6...90.8 m³/h	Normal (body in brass)	-	1100 kPa (11 bar)
SF1RE	1...8"	0.2...55.3 m³/h	Normal (body in brass)	-	1100 kPa (11 bar)
SF2EI	1...8"	0.6...90.8 m³/h	Corrosive (AISI 316L compatibility)	-	3000 kPa (30 bar)
SF2REI	1...8"	0.2...55.3 m³/h	Corrosive (AISI 316L compatibility)	-	3000 kPa (30 bar)
SF3E	1/2"	0.174...0.846 m³/h	Normal (body in brass)	X	1100 kPa (11 bar)
SF4E	3/4"	0.138...0.768 m³/h	Normal (body in brass)	X	1100 kPa (11 bar)
SF6E	1"	0.2...1.0 m³/h	Normal (body in brass)	X	1100 kPa (11 bar)



SF2EI



SF3E

5

ACCESSORIES

Article	Description
DBZ-09	Paddles for liquid flow switch in stainless steel AISI 316L.



Models SF1E and SF2EI with TÜV approval.

Notes: the flow switches are supplied with paddles model DBZ-09.

On request available: 1" NPT connection version (product code "SFxx/NPT") for SF1 and SF2 series.



DBZ-09

SF1K/SF1E/SF2EI

Flow chart H₂O

Pipe connector Ø	Q _{max} m ³ /h recommended	Min. adjustment m ³ /h cut-off cut-in	Max. adjustment m ³ /h cut-off cut-in
1"	3,6	0,6 (1,0)	2,0 (2,1)
1 1/4"	6,0	0,8 (1,3)	2,8 (3,0)
1 1/2"	9,0	1,1 (1,7)	3,7 (4,0)
2"	15,0	2,2 (3,1)	5,7 (6,1)
2 1/2"	24,0	2,7 (4,0)	6,5 (7,0)
3"	36,0	4,3 (6,2)	10,7 (11,4)
4"	60,0	11,4 (14,7)	27,7 (29,0)
4" Z	60,0	6,1 (8,0)	17,3 (18,4)
5"	94,0	22,9 (28,4)	53,3 (55,6)
5" Z	94,0	9,3 (12,9)	25,2 (26,8)
6"	120,0	35,9 (43,1)	81,7 (85,1)
6" Z	120,0	12,3 (16,8)	30,6 (32,7)
8"	240,0	72,6 (85,1)	165,7 (172,5)
8" Z	240,0	38,6 (46,5)	90,8 (94,2)

For models with suffix "Z" the longest paddle must be used to obtain the values indicated on th table.

Pressure drop at the maximum flow (Q_{max}): 0,08 bar

Nota: the values indicated on schedule have been measured with the flow switch mounted on horizontal position.

SF1RE/SF2REI

Flow chart H₂O

Pipe connector Ø	Min. adjustment m ³ /h cut-off cut-in	Max. adjustment m ³ /h cut-off cut-in
1"	0,2 (0,6)	1,0 (1,1)
1 1/4"	0,25 (0,9)	1,4 (1,6)
1 1/2"	0,5 (1,2)	1,6 (2,2)
2"	0,9 (2,3)	3,6 (4,1)
2 1/2"	1,2 (3,1)	4,9 (5,5)
3"	2,1 (4,9)	7,4 (8,2)
4"	4,9 (11,3)	17,1 (19,1)
4" Z	3,3 (7,7)	11,6 (13,0)
5"	9,7 (22,4)	34,0 (37,9)
5" Z	5,0 (11,5)	17,5 (19,6)
6"	13,6 (31,5)	47,6 (53,2)
6" Z	6,1 (14,1)	21,4 (23,9)
8"	25,7 (59,6)	90,1 (100,7)
8" Z	21,7 (36,5)	55,3 (61,8)

Nota: the values indicated on schedule have been measured with the flow switch mounted on horizontal position.

Palette (models without "T" pipe fitting)


SF3E/4E/6E

Flow chart with „T“ fittings

SF-	Pipe connector with "T" pipe fitting Ø	Min. adjustment m ³ /h cut-off cut-in	Max. adjustment m ³ /h cut-off cut-in
3E	1/2"	0,174 (0,48)	0,846 (0,948)
4E	3/4"	0,138 (0,408)	0,768 (0,858)
6E	1"	0,2 (0,6)	1,0 (1,1)

The "T" connectors have cylindrical GAS thread.

Nota: the values indicated on schedule have been measured with the flow switch mounted on horizontal position.

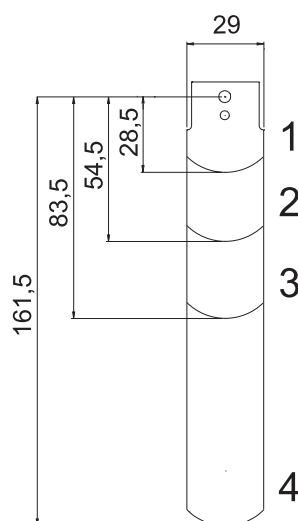

PIPE	PADDLES
1"	1
1 1/4"	1
1 1/2"	1
2"	1+2
2 1/2"	1+2
3"	1+2+3
4"	1+2+3
4" Z	1+2+3+4
5"	1+2+3
5" Z	1+2+3+4
6"	1+2+3
6" Z	1+2+3+4
8"	1+2+3
8" Z	1+2+3+4



AIR FLOW SWITCH

Air or non-aggressive gas flow control. Alarm signal for flow shortage. Well-suited for air ducts, air conditioning and air handling systems.

Technical data	
Contacts	Dust-tight microswitch with SPDT contacts (NC/NO)
Switch capacity	15 (8) A, 24...250 V AC
Ambient temperature	-40...+85 °C
Ambient humidity	10...90 % RH (non-condensing)
Media temperature	-10...+85 °C
Storage temperature	-40...+85 °C
Storage humidity	< 95 % RH
Material, casing cover	Transparent PC
Material, casing base	ABS
Body	Brass
Paddles	Stainless steel AISI 301
Weight	630 g
Dimensions	265.5 x 140 x 102 mm
Protection class	IP65

Article	Cut out	Cut in	Max. air temperature
SL1E	min. 1.0 m/s - max. 8.0 m/s	min. 2.5 m/s - max. 9.2 m/s	85 °C



SL1E

ACCESSORIES

Article	Description
DBZ-08	Stainless steel AISI 301 paddle for air flow switch



Supplied with paddle model DBZ-08.

The values indicated on schedule have been measured with the flow switch mounted on horizontal position.



DBZ-08

Pressure switches and transmitters

AIR DIFFERENTIAL PRESSURE SWITCHES

Differential pressure for air or non-aggressive and non-inflammable gas control.



DBL

Technical data	
Contacts	Microswitch with SPDT contacts, according to EN 1854 (EN 60730)
Switch capacity	1.5 (0.4) A, 250 V AC
Ambient temperature	-20...+85 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-40...+85 °C
Max. pressure	100 mbar
Diaphragm	Silicone (LSR)
Casing	Polystyrene
Weight	180...210 g
Dimensions	Ø 118 x h 57.5 mm
Protection class	IP54
Isolation class	II

Article	Range	Hysteresis
DBL-205A	0.3...4.0 mbar (30...400 Pa)	0.15 mbar ± 15%
DBL-205B	0.5...5.0 mbar (50...500 Pa)	0.2 mbar ± 15%
DBL-205C	0.2...3.0 mbar (20...300 Pa)	0.1 mbar ± 15%
DBL-205D	2...10 mbar (200...1000Pa)	1.0 mbar ± 15%
DBL-205E	5...25 mbar (500...2500 Pa)	1.5 mbar ± 15%

ACCESSORIES

Article	Description
DBZ-06	Connection set with 2 PVC duct connectors, 2 m flexible PVC pipe and 4 screw
DBZ-14A	Set with mounting bracket and screws (S-shaped)
DBZ-14B	Set with mounting bracket and screws (L-shaped)

 Articles available in multipack /M: DBL-205.../M (45 pcs.)



DBZ-06



DBZ-14A



DBZ-14B

MANOMETERS AND AIR DIFFERENTIAL PRESSURE SWITCHES

Differential pressure visualization of air or non-aggressive and non-inflammable gases with alarm at a pre-set value.

The compact unit consists of:

- a differential manometer with an inclined liquid pipe, complete of tank to allow temporary over-pressure;
- a bottle containing indication liquid and 2 stickers (red/green);
- a differential pressure switch connected to the manometer with PVC hose, complete of pressure adjustment knob, terminals for electrical connections and cable gland PG 9 (protection class according to EN 60529: IP54);
- PVC hose Ø 4 x 7 - 2.2 m length, pipes and fixing screws.



DB-M6P6

Technical data	
Contacts	Dust-tight microswitch with SPDT contacts
Switch capacity	3 (2) A, 250 V AC
Ambient temperature	-40...+60 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	DB-M...: -45...+70 °C DB-M...P...: -25...+70 °C
Accuracy	5 Pa
Fluid	ISO-paraffin with density at 15 °C DB-M6P6: red colour DB-M10P13: blue colour
Electrical connection	With terminals and cable gland PG9
Material	ABS, PMMA, PC
Packing	NBR
Weight	400...820 g
Dimensions	290 x 140 x 64 mm
Protection class	IP54 class II
Isolation class	II

Article	Manometer range	Pressure switch range	Hysteresis	Max. pressure
DB-M6	0...600 Pa	-	-	200 kPa
DB-M6P6	0...600 Pa	40...600 Pa	30 Pa	50 kPa
DB-M10	0...1500 Pa	-	-	200 kPa
DB-M10P13	0...1500 Pa	100...1300 Pa	80 Pa	50 kPa

DIFFERENTIAL PRESSURE TRANSMITTERS 0...2.5 BAR

Differential pressure transmitter for monitoring differential gaseous pressure, non-aggressive media.
Can be mounted in any position.

Possible areas of applications are:

- air-conditioning and clean rooms;
- building automation;
- valve and flap control;
- fluid and level monitoring;
- control of air flows.



984M.3X3104



984M.343714

Technical data	
Supply voltage	24 V AC / DC with output 0...10 V DC and 4...20 mA 24 V DC with output 4...20 mA (2 wires)
Outputs	0...10 V DC (max 10 mA) 4...20 mA (20...500 Ohm)
Sensor	Piezoresistive
Ambient temperature	0...50 °C
Ambient humidity	10...95 % RH (non-condensing)
Storage temperature	-10...+70 °C
Accuracy	< ± 0.2 % of end of scale
Typical long term stability	< ± 0.5 % to ± 2.5 % of end of scale/year
Response time	100 ms or 1 sec., selectable
Installation	Can be mounted in any position
Casing	Housing with process connection P2 made of ABS, mounting part with process connection P1 made of POM
Weight	170 g
Dimensions	Max. Ø 118 x h 57.5 mm
Protection class	IP54
Certification	EN60770, EN61326

984M.3

Pressure ranges (Pa):

Range 1	Range 2	Max pressure	X	3	X	X	4
0...100 Pa (1.0 mbar)	0...250 Pa (2.5 mbar)	20 kPa	2				
0...250 Pa (2.5 mbar)	0...500 Pa (0.5 mbar)	20 kPa	3				
0...500 (5.0 mbar)	0...1000 Pa (10 mbar)	20 kPa	5				
0...5 kPa (50 mbar)	0...10 kPa (100 mbar)	60 kPa	7				
0...25 kPa (250 mbar)	0...50 kPa (500 mbar)	300 kPa	9				
0...100 kPa (1000 mbar)	0...250 Pa (2500 mbar)	1,2 MPa	B				
-50 PA ...+50 Pa (0,5...+0,5 mbar)			x				

Unit of measurement Pascal

Outputs and power supply

0...10 Vdc	24 V AC/DC, with NPN open collector output, 3-pole cable	1
4...20 mA	24 V DC, without NPN open collector output, 2-pole cable	2
4...20 mA	24 V AC/DC, with NPN open collector output, 3-pole cable	3
0...10 Vdc	24 V AC/DC, without NPN open collector output, 3-pole cable	7
4...20 mA	24 V AC/DC, without NPN open collector output, 3-pole cable	D

Display

No	0
With LED display, 3.5 characters (not for 4... 20 mA, 2 wires)	1

Electrical connections

Set with mounting bracket and screws

DBZ-06



DBZ-14A



DBZ-14B

ACCESSORIES

Article	Description
DBZ-06	Connection set with 2 PVC duct connectors, 2 m flexible PVC pipe and 4 screw
DBZ-14A	Set with mounting bracket and screws (S-shaped)
DBZ-14B	Set with mounting bracket and screws (L-shaped)
104552	Test certificate

DIFFERENTIAL PRESSURE TRANSMITTER WITH DISPLAY

Differential pressure transmitter for use in air and non-corosive gases. For control of dampers, frequency converters, VAV systems etc.

Technical data	
Supply voltage	24 V AC/DC (21...27 V AC/DC)
Output signal, pressure	0...10 V DC / 4...20 mA
Measuring range, pressure	0...100 / 0...300 / 0...500 / 0...999 Pa
Accuracy, pressure	±1 % full scale at 20 °C
Electronic damping	0...20 s
Display	Yes
Dimensions, external (WxHxD)	89 x 129 x 58 mm
Protection class	IP54



TPDA

MODELS WITH CONNECTION KIT (MTU) AND 2M PLASTIC TUBE

Article	Description
TPDA	Differential pressure transmitter

DIFFERENTIAL PRESSURE TRANSMITTER WITH BUILT-IN CONTROLLER AND DISPLAY

Differential pressure transmitter for use in air and non-corosive gases. For control of dampers, frequency converters, VAV systems etc.

Technical data	
Supply voltage	24 V AC/DC (21...27 V AC/DC 50-60 Hz)
Output signal, pressure	0...10 V DC / 4...20 mA
Output signal, controller	0...10 V DC
Measuring range, pressure	0...100 / 0...300 / 0...500 / 0...999 Pa
Accuracy, pressure	±1 % full scale at 20 °C
P-band	0...300 %
I-time	0...999 s
D-factor	0...999
Electronic damping	0...20 s
Display type	LED, three digits
Mounting	Wall
Dimensions, external (WxHxD)	89 x 129 x 58 mm
Protection class	IP54



TPDA-C

MODELS WITH CONNECTION KIT (MTU) AND 2M PLASTIC TUBE

Article	Description
TPDA-C	Differential pressure transmitter

DIFFERENTIAL PRESSURE TRANSMITTERS WITH COMMUNICATION

Technical data

Supply voltage	24 V AC/DC ±15 %
Overall accuracy pressure	≤ 1 % full scale
Power consumption	2 VA (rms), min. trafo size 7,5 VA
Operating temperature	-25...+50 °C
Communication	EXoline / Modbus
Protection class	IP54

Universal inputs (UI1, UI2) to be configured as PT1000, Ni1000 (6180 ppm/K), digital or 0...10 V inputs

PT1000 input	-40...+60°C / -40...+140°F, accuracy ±1 K (-25...0°C), ±0.5 K (0...50°C)
Ni1000 input	-40...+60°C / -40...+140°F, accuracy ±1 K (-25...0°C), ±0.5 K (0...50°C)
Digital input	Potential-free contacts on/off (closed=on)
0...10 V input	±1 % full scale accuracy



TPDAxxC



TPDAxxxxCx

Article	Working range	Number of sensors
TPDA12C	0...1250 Pa	1
TPDA25C	0...2500 Pa	1
TPDA75C	0...7500 Pa	1
TPDA12C2	PS1: 0...1250 Pa / PS2: 0...1250 Pa	2
TPDA25C2	PS1: 0...2500 Pa / PS2: 0...2500 Pa	2
TPDA1225C2	PS1: 0...1250 Pa / PS2: 0...2500 Pa	2
TPDA1275C2	PS1: 0...1250 Pa / PS2: 0...7500 Pa	2

PRESIGO - DIFFERENTIAL PRESSURE TRANSMITTERS WITH ANALOGUE OUTPUTS

Technical data

Supply voltage	24 V AC/DC ±15 %
Overall accuracy pressure	≤ 1 % full scale
Power consumption	0...10 V mode : 2 VA (rms), min. trafo size 7,5 VA4...20 mA mode : 2.7 VA (rms), min. trafo size 9 VA
Operating temperature	-25...+50 °C
Protection class	IP54



TPDAxxC



TPDAxxxxAx

Article	Working range	Number of sensors
TPDA12A	0...1250 Pa	1
TPDA25A	0...2500 Pa	1
TPDA75A	0...7500 Pa	1
TPDA1225A2	PS1: 0...1250 Pa / PS2: 0...2500 Pa	2
TPDA1275A2	PS1: 0...1250 Pa / PS2: 0...7500 Pa	2

PRESSURE TRANSMITTER FOR LIQUIDS AND GASES

Pressure transmitter for measurement of liquids and gases.

Technical data	
Output signal	0...10 V DC (three-wire) or 4...20 mA (two-wire)
Pressure connection	G 1/4" (outside thread)
Dynamic response time	< 2 ms, 1 ms typically
Tolerable overload	≤ 4 bar 3.0 x full scale, > 4 bar 2.5 x full scale
Media temperature	-15...+125 °C
Ambient temperature	-30...+85 °C
Storage temperature	-50...+100 °C
Accuracy, characteristic line	±0.3 % full scale *
Accuracy, resolution	0.1 % full scale *
Accuracy, thermal characteristic	Max. ±0.2 % full scale / 10 K *
Accuracy, long-term stability according to IEC EN 60770-1	Max. ±0.25 % full scale *
Sealing	FPM
Weight	90 g
Cable length	1.5 m
Protection class	IP67



TPGL

MODELS

Article	Working range	Output signal	Supply voltage	Power consumption
TPGL1	0...100 kPa (1 bar)	0...10 V DC	12...33 V DC / 24 V AC ±15 %	< 7 mA
TPGL1-420	0...100 kPa (1 bar)	4...20 mA	7...33 V DC	< 23 mA
TPGL2.5	0...250 kPa (2.5 bar)	0...10 V DC	12...33 V DC / 24 V AC ±15 %	< 7 mA
TPGL2.5-420	0...250 kPa (2.5 bar)	4...20 mA	7...33 V DC	< 23 mA
TPGL6	0...600 kPa (6 bar)	0...10 V DC	12...33 V DC / 24 V AC ±15 %	< 7 mA
TPGL6-420	0...600 kPa (6 bar)	4...20 mA	7...33 V DC	< 23 mA
TPGL10	0...1000 kPa (10 bar)	0...10 V DC	12...33 V DC / 24 V AC ±15 %	< 7 mA
TPGL10-420	0...1000 kPa (10 bar)	4...20 mA	7...33 V DC	< 23 mA
TPGL16	0...1600 kPa (16 bar)	0...10 V DC	12...33 V DC / 24 V AC ±15 %	< 7 mA
TPGL16-420	0...1600 kPa (16 bar)	4...20 mA	7...33 V DC	< 23 mA
TPGL25	0...2500 kPa (25 bar)	0...10 V DC	12...33 V DC / 24 V AC ±15 %	< 7 mA
TPGL25-420	0...2500 kPa (25 bar)	4...20 mA	7...33 V DC	< 23 mA
TPGL40	0...4000 kPa (40 bar)	0...10 V DC	12...33 V DC / 24 V AC ±15 %	< 7 mA
TPGL40-420	0...4000 kPa (40 bar)	4...20 mA	7...33 V DC	< 23 mA

ACCESSORIES

Article	Description
TPL105074	Mounting spacer which lowers the temperature at higher media temperatures than the sensor can handle.
DBZ-AD1	Adapter 1/4" to 1/2". For mounting immersion sensors in 1/2".



For other models please contact Industrietechnik.



TPL105074



DBZ-AD1

DIFFERENTIAL PRESSURE TRANSMITTER FOR LIQUIDS AND GASES

Differential pressure transmitter for measurement of liquids (also glycol-mixed) and gases (not ammonia).

Supply voltage	24 V CA / 18...33 V DC $\pm 15\%$ (output signal 0...10 V), 0.1 VA 11...33 V DC $\pm 15\%$, two-wire (output signal 4...20 mA), 0.5 VA
Output signal	0...10 V DC or 4...20 mA (two-wire)
Ambient temperature	-15...+85 °C
Accuracy	TPDL10...TPDL250: $\pm 1.3\%$ es TPDL400: $\pm 0.8\%$ es TPDL600...TPDL2500: $\pm 0.5\%$ es
Connection	Screw fitting for $\varnothing 6$ mm pipe included
Electrical connection	DIN EN 175301 803-A
Dimensions	68 x 40 x 113 mm
Protection class	IP65



TPDL

Article	Output signal	Working range
TPDL10	0...10 V DC	0...10 kPa (0...0.1 bar)
TPDL10-420	4...20 mA	0...10 kPa (0...0.1 bar)
TPDL20	0...10 V DC	0...20 kPa (0...0.2 bar)
TPDL20-420	4...20 mA	0...20 kPa (0...0.2 bar)
TPDL40	0...10 V DC	0...40 kPa (0...0.4 bar)
TPDL40-420	4...20 mA	0...40 kPa (0...0.4 bar)
TPDL100	0...10 V DC	0...100 kPa (0...1 bar)
TPDL100-420	4...20 mA	0...100 kPa (0...1 bar)
TPDL250	0...10 V DC	0...250 kPa (0...2.5 bar)
TPDL250-420	4...20 mA	0...250 kPa (0...2.5 bar)
TPDL400	0...10 V DC	0...400 kPa (0...4 bar)
TPDL400-420	4...20 mA	0...400 kPa (0...4 bar)
TPDL600	0...10 V DC	0...600 kPa (0...6 bar)
TPDL600-420	4...20 mA	0...600 kPa (0...6 bar)
TPDL1000	0...10 V DC	0...1000 kPa (0...10 bar)
TPDL1000-420	4...20 mA	0...1000 kPa (0...10 bar)
TPDL1600	0...10 V DC	0...1600 kPa (0...16 bar)
TPDL1600-420	4...20 mA	0...1600 kPa (0...16 bar)
TPDL2500	0...10 V DC	0...2500 kPa (0...25 bar)
TPDL2500-420	4...20 mA	0...2500 kPa (0...25 bar)



TPDL-NIPPEL

Article	Description
TPDL-NIPPEL	Nipple (R=1/8" 27 NPT) for connection of $\varnothing 6$ mm copper pipe
TPDL-R	Copper pipe, $\varnothing 6$ mm, length 30 cm



For other models please contact Industrietechnik.



TPDL-R

LEVEL SWITCH

Level control of normal liquids contained in tanks and barrels.

Alarm signal of minimum or maximum level.


Technical data	
Contacts	Dust-tight microswitch with SPDT contacts
Switch capacity	15 (8) A, 24...250 V AC
Ambient temperature	-40...+85 °C
Ambient humidity	10...90 % RH (non-condensing)
Media temperature	max. +85 °C
Storage temperature	-40...+85 °C
Storage humidity	< 95 % RH
Level length	200 mm
Protection class	IP65
Isolation class	I
Material	
Material, casing cover	Transparent polycarbonate
Material, casing base	ABS
Body	Brass
Float	Acrylic
Weight	960 g
Dimensions	140 x 62 x 65 mm

Article	Hysteresis	Max. temperature	Max. pressure
SQ01	10/14 mm	+85 °C	11 bar



SQ01

6 Wireless products

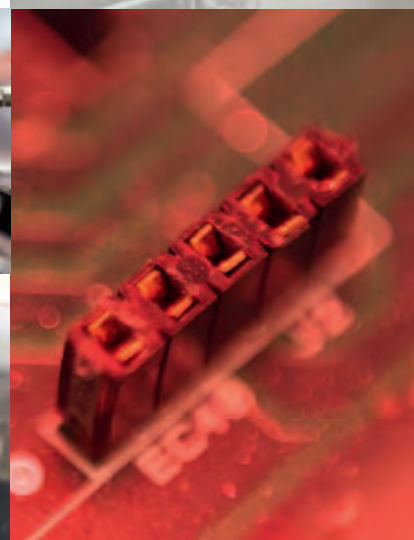

WIRELESS RECEIVER WITH MODBUS COMMUNICATION

Modbus receiver that can pair with up to 32 digital or analogue sensors.

News!



MR32W

Technical data	
Supply voltage	24 V AC/DC (21...27 V AC/DC)
Frequency	868 MHz
Protection class	IP54
Ambient temperature	-10...+50 °C
Ambient humidity	Max. 85 % RH, non-condensing
Dimensions, external (WxHxD)	120 x 112 x 40 mm
Article	Description
MR32W	Wireless 32 channel receiver with Modbus communication

WIRELESS ROOM TEMPERATURE AND HUMIDITY SENSOR

High quality room temperature and humidity sensor within.

News!



SAUW

Technical data	
Power supply	AA 1.5 V L91 battery x 2
Frequency	868 MHz
Protection class	IP30
Measuring range, temperature	-10...+50 °C
Measuring range, humidity	0...100 % RH
Dimensions, external (WxHxD)	86 x 86 x 30 mm
Article	Description
SAUW	Wireless room temperature and humidity sensor

WIRELESS OUTDOOR TEMPERATURE SENSOR

Sensor for outdoor temperature measurement.

News!



SEW-PT1000

Technical data	
Power supply	CR123A 3V lithium battery x 2
Frequency	868 MHz
Protection class	IP54
Ambient temperature	-40...+50 °C
Ambient humidity	up to 95 % RH non-condensing
Article	Description
SEW	Wireless outdoor temperature sensor
SEW-PT1000	Wireless outdoor temperature sensor equipped with a terminal for connecting an external PT1000 sensor

WIRELESS CEILING MOUNTED MOTION DETECTOR

Detector providing a signal when someone enters the room. 360° detection area with a diameter of 8 meters.

Technical data	
Power supply	CR123A 3V lithium battery x 1 (CR123A)
Frequency	868 MHz
Protection class	IP20
Ambient temperature	-10...+45 °C
Ambient humidity	Max. 85 % RH (non-condensing)

Article	Description
SIR-SW	Wireless ceiling mounted IR motion detector



SIR-SW

WIRELESS MOTION DETECTOR

Detector providing a signal when someone enters the room.

Technical data	
Power supply	CR123A 3V lithium battery (CR123A)
Frequency	868 MHz
Protection class	IP20
Ambient temperature	-10...+50 °C
Ambient humidity	Max. 85 % RH (non-condensing)

Article	Description
SIR-PW	Wireless motion detector



SIR-PW

WIRELESS DIGITAL INPUT/DOOR CONTACT

Digital input/door contact detecting opening of door or window.


Technical data	
Power supply	CR2 3V lithium battery
Frequency	868 MHz
Protection class	IP30
Ambient temperature	-10...+50 °C
Ambient humidity	Max. 85 % RH (non-condensing)

Article	Description
CFW	Wireless digital input / door contact



CFW

7 Damper actuators

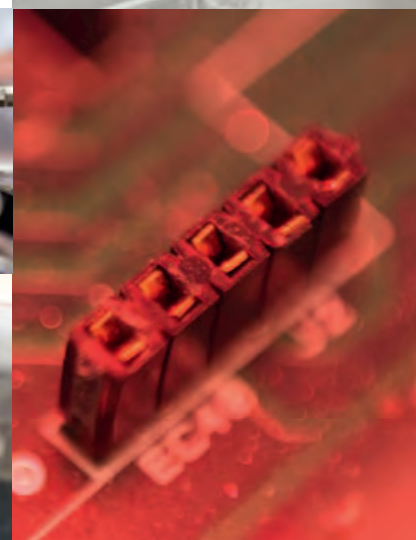

DAMPER ACTUATORS WITHOUT SPRING RETURN, 2 Nm

Designed for applications with small dampers (0.5 m²) of ventilation and air handling units.



DAK-DMK

Technical data	
Max. damper size	0.5 m ²
Torque	2 Nm
Frequency	50...60 Hz
Rotation angle	95°
Ambient temperature	-20...+50 °C
Ambient humidity	5...95% UR
Noise level	Max 45 dB
Mounting	Directly on jack shaft
For jack shaft	6...16 mm Ø (round shaft), 5...11 mm (square shaft)
Weight	600 g
Protection class	IP54
Isolation class	III (DAK230: class II)
Certification	CE

Article	Supply voltage	Control signal	Power consumption	Auxiliary switch	Stroke time
DAK24	24 V AC / DC	On/off or 3 point	2,0 W	-	35...45 s
DAK24S	24 V AC / DC	On/off or 3 point	2,0 W	1 fixed SPDT 3 (1.5) A / AC 230 V positioned on 10°	35...45 s
DAK230	230 V AC	On/off or 3 point	1,5 W	-	35...45 s
DAK230S	230 V AC	On/off or 3 point	1,5 W	1 fixed SPDT 3 (1.5) A / AC 230 V positioned on 10°	35...45 s
DMK24	24 V AC / DC	2...10 V DC	2,5 W	-	45...55 s

DAMPER ACTUATORS WITHOUT SPRING RETURN, 4 Nm

Well-suited for applications with small dampers (up to 1 m²) in ventilation and air handling units.



DAN-DMN

Technical data	
Max. damper size	1 m ²
Torque	4 Nm
Frequency	50...60 Hz
Stroke time	35 s
Rotation angle	90°. Limitation: 5...85° in 5° steps
Ambient temperature	-20...+50 °C
Ambient humidity	5...95 % RH
Noise level	Max 45 dB
Mounting	Directly on jack shaft
For jack shaft	10...16 mm Ø (round shaft), 10...12 mm (square shaft)
Protection class	IP44 or IP54 with cable glands
Isolation class	III (DAN230: class II)
Certification	CE

Article	Supply voltage	Control signal	Power consumption	Auxiliary switch	Weight
DAN24	24 V AC / DC	On/off or 3 point	Operating: 2.5 W. Maintenance: 0.85 W	-	900 g
DAN24S	24 V AC / DC	On/off or 3 point	Operating: 2.5 W. Maintenance: 0.85 W	2 x 3 (1.5) A / AC 230 V	900 g
DAN230	230 V AC	On/off or 3 point	Operating: 4.0 W. Maintenance: 3.0 W	-	1000 g
DAN230S	230 V AC	On/off or 3 point	Operating: 4.0 W. Maintenance: 3.0 W	2 x 3 (1.5) A / AC 230 V	1000 g
DMN24	24 V AC / DC	0...10 V DC	Operating: 2.5 W. Maintenance: 0.85W	-	900 g

DAMPER ACTUATORS WITHOUT SPRING RETURN, 8 Nm

Well-suited for applications with dampers (2 m²) in ventilation and air handling units.

Technical data	
Max. damper size	2 m ²
Torque	8 Nm
Frequency	50...60 Hz
Stroke time	30 s
Rotation angle	Operating: 90° (93° mechanical) Limitation: 5...85° in 5° steps
Ambient temperature	-20...+50 °C
Ambient humidity	5...95 % RH
Noise level	Max 45 dB
Mounting	Directly on jack shaft
For jack shaft	10...20 mm Ø (round shaft), 10...20 mm (square shaft)
Weight	1200 g
Protection class	IP44 or IP54 with cable glands
Isolation class	III (DAS230, DMS230: class II)
Certification	CE



Article	Supply voltage	Control signal	Power consumption	Auxiliary switch
DAS24	24 V AC / DC	on/off or 3 point	Operating: 3.9 W Maintenance: 0.4 W	-
DAS24S	24 V AC / DC	on/off or 3 point	Operating: 3.9 W Maintenance: 0.4 W	2 x 3 (1.5) A / AC 230 V
DAS230	230 V AC	on/off or 3 point	Operating: 4.8 W Maintenance: 1.2 W	-
DAS230S	230 V AC	on/off or 3 point	Operating: 4.8 W Maintenance: 1.2 W	2 x 3 (1.5) A / AC 230 V
DMS24	24 V AC / DC	Y1: 0(2)...10 V DC Y2: 0(4)...20 mA U: 0(2)...10 V DC (feedback signal)	Operating: 4.0 W Maintenance: 0.7 W	-
DMS24S	24 V AC / DC	Y1: 0(2)...10 V DC Y2: 0(4)...20 mA U: 0(2)...10 V DC (feedback signal)	Operating: 4.0 W Maintenance: 0.7 W	2 x 3 (1.5) A / AC 230 V
DMS230	230 V AC	Y1: 0(2)...10 V DC Y2: - U: 0(2)...10 V DC (feedback signal)	Operating: 4.8 W Maintenance: 1.0 W	-
DMS230S	230 V AC	Y1: 0(2)...10 V DC Y2: - U: 0(2)...10 V DC (feedback signal)	Operating: 4.8 W Maintenance: 1.0 W	2 x 3 (1.5) A / AC 230 V

DAMPER ACTUATORS WITHOUT SPRING RETURN, 16 Nm

Well-suited for applications with dampers (4 m²) in ventilation and air handling units.



DA-DM

Technical data	
Max. damper size	4 m ²
Torque	16 Nm
Frequency	50...60 Hz
Stroke time	80 s
Rotation angle	90° Limitation: 5...85° in 5° steps
Ambient temperature	-20...+50 °C
Ambient humidity	5...95 % RH
Noise level	Max 45 dB
Mounting	Directly on jack shaft
For jack shaft	10...20 mm Ø (round shaft), 10...20 mm (square shaft)
Weight	1200 g
Protection class	IP44 or IP54 with cable glands
Isolation class	III (DA230, DM230: class II)
Certification	CE

Article	Supply voltage	Control signal	Power consumption	Auxiliary switch
DA24	24 V AC / DC	on/off or 3 point	Operating: 3.9 W Maintenance: 0.4 W	-
DA24S	24 V AC / DC	on/off or 3 point	Operating: 3.9 W Maintenance: 0.4 W	2 x 3 (1.5) A / AC 230 V
DA230	230 V AC	on/off or 3 point	Operating: 4.8 W Maintenance: 1.2 W	-
DA230S	230 V AC	on/off or 3 point	Operating: 4.8 W Maintenance: 1.2 W	2 x 3 (1.5) A / AC 230 V
DM24	24 V AC / DC	Y1: 0(2)...10 V DC Y2: 0(4)...20 mA U: 0(2)...10 V DC (feedback signal)	Operating: 4.0 W Maintenance: 0.7 W	-
DM24S	24 V AC / DC	Y1: 0(2)...10 V DC Y2: 0(4)...20 mA U: 0(2)...10 V DC (feedback signal)	Operating: 4.0 W Maintenance: 0.7 W	2 x 3 (1.5) A / AC 230 V
DM230	230 V AC	Y1: 0(2)...10 V DC Y2: - U: 0(2)...10 V DC (feedback signal)	Operating: 4.8 W Maintenance: 1.0 W	-
DM230S	230 V AC	Y1: 0(2)...10 V DC Y2: - U: 0(2)...10 V DC (feedback signal)	Operating: 4.8 W Maintenance: 1.0 W	2 x 3 (1.5) A / AC 230 V

DAMPER ACTUATORS WITHOUT SPRING RETURN, 24 Nm

Well-suited for applications with dampers (6 m²) in ventilation and air handling units.



DAL-DML

Technical data	
Max. damper size	6 m ²
Torque	24 Nm
Frequency	50...60 Hz
Stroke time	125 s
Rotation angle	90° Limitation: 5...85° in 5° steps
Ambient temperature	-20...+50 °C
Ambient humidity	5...95 % RH
Noise level	Max 45 dB
Mounting	Directly on jack shaft
For jack shaft	10...20 mm Ø (round shaft), 10...20 mm (square shaft)
Weight	1200 g
Protection class	IP44 or IP54 with cable glands
Isolation class	III (DAL230, DML230: class II)
Certification	CE

Article	Supply voltage	Control signal	Power consumption	Auxiliary switch
DAL24	24 V AC / DC	on/off or 3 point	Operating: 3.9 W Maintenance: 0.4 W	-
DAL24S	24 V AC / DC	on/off or 3 point	Operating: 3.9 W Maintenance: 0.4 W	2 x 3 (1.5) A / AC 230 V
DAL230	230 V AC	on/off or 3 point	Operating: 4.8 W Maintenance: 1.2 W	-
DAL230S	230 V AC	on/off or 3 point	Operating: 4.8 W Maintenance: 1.2 W	2 x 3 (1.5) A / AC 230 V
DML24	24 V AC / DC	Y1: 0(2)...10 V DC Y2: 0(4)...20 mA U: 0(2)...10 V DC (feedback signal)	Operating: 4.0 W Maintenance: 0.7 W	-
DML24S	24 V AC / DC	Y1: 0(2)...10 V DC Y2: 0(4)...20 mA U: 0(2)...10 V DC (feedback signal)	Operating: 4.0 W Maintenance: 0.7 W	2 x 3 (1.5) A / AC 230 V
DML230	230 V AC	Y1: 0(2)...10 V DC Y2: - U: 0(2)...10 V DC (feedback signal)	Operating: 4.8 W Maintenance: 1.0 W	-
DML230S	230 V AC	Y1: 0(2)...10 V DC Y2: - U: 0(2)...10 V DC (feedback signal)	Operating: 4.8 W Maintenance: 1.0 W	2 x 3 (1.5) A / AC 230 V

DAMPER ACTUATORS WITHOUT SPRING RETURN, 32 Nm

Well-suited for applications with medium or large dampers (8 m²) in ventilation and air handling units.



DAG-DMG

Technical data	
Max. damper size	8 m ²
Torque	32 Nm
Frequency	50...60 Hz
Rotation angle	90° Limitation: 5...85° in 5° steps
Ambient temperature	-20...+50 °C
Ambient humidity	5...95 % RH
Noise level	Max 45 dB
Mounting	Directly on jack shaft
For jack shaft	10...20 mm Ø (round shaft), 10...16 mm (square shaft)
Protection class	IP44 or IP54 with cable glands
Isolation class	III (DAG230: class II)
Certification	CE

Article	Supply voltage	Control signal	Power consumption	Auxiliary switch	Stroke time	Weight
DAG24	24 V AC / DC	on/off or 3 point	Operating: 4.0 W Maintenance: 0.5 W	-	160 s	1100 g
DAG24S	24 V AC / DC	on/off or 3 point	Operating: 4.0 W Maintenance: 0.5 W	2 x 3 (1.5) A / AC 230 V	160 s	1100 g
DAG230	230 V AC	on/off or 3 point	Operating: 4.8 W Maintenance: 1.2 W	-	160 s	1200 g
DAG230S	230 V AC	on/off or 3 point	Operating: 4.8 W Maintenance: 1.2 W	2 x 3 (1.5) A / AC 230 V	160 s	1200 g
DMG24	24 V AC / DC	Y1: 0(2)...10 V DC Y2: 0(4)...20 mA U: 0(2)...10 V DC (feedback signal)	Operating: 2.5 W Maintenance: 0.3 W	-	240 s	1200 g
DMG24S	24 V AC / DC	Y1: 0(2)...10 V DC Y2: 0(4)...20 mA U: 0(2)...10 V DC (feedback signal)	Operating: 2.5 W Maintenance: 0.3 W	2 x 3 (1.5) A / AC 230 V	240 s	1200 g

DAMPER ACTUATORS WITH SPRING RETURN, 5 Nm

Well-suited for applications with security dampers used as antifreeze, antismoke or for sealing in the hygienic-sanitary field.

Technical data	
Max. damper size	1 m ²
Torque	5 Nm
Frequency	50...60 Hz
Running time, actuator	50...70 s
Running time, spring return	< 20 s
Rotation angle	Operating: 90° Limitation: 5...85° in 5° steps
Ambient temperature	-20...+50 °C
Ambient humidity	5...95 % RH
Noise level	Max 45 dB
Mounting	Directly on jack shaft
For jack shaft	10...16 mm Ø (round shaft), 7...11 mm (square shaft)
Protection class	IP54
Isolation class	II
Certification	CE



DAN230F

Article	Supply voltage	Power consumption	Auxiliary switch	Weight
DAN24F	24 V AC / DC	Operating: 7.2 W Maintenance: 2.5 W	-	1800 g
DAN24FS	24 V AC / DC	Operating: 7.2 W Maintenance: 2.5 W	2 x SPDT 3 (1.5) A / AC 230 V	1800 g
DAN230F	230 V AC	Operating: 4.2 W Maintenance: 2.5 W	-	1900 g
DAN230FS	230 V AC	Operating: 4.2 W Maintenance: 2.5 W	2 x SPDT 3 (1.5) A / AC 230 V	1900 g

DAMPER ACTUATORS WITH SPRING RETURN, 10 Nm

Well-suited for applications with security dampers used as antifreeze, antismoke or for sealing in the hygienic-sanitary field.



DAT230F

Technical data	
Max. damper size	2 m ²
Torque	10 Nm
Frequency	50...60 Hz
Running time, actuator	100 s
Running time, spring return	25 s
Rotation angle	-5°...+95°
Ambient temperature	-20...+50 °C
Ambient humidity	5...95 % RH
Noise level	Max 45 dB
Mounting	Directly on jack shaft
For jack shaft	10...19 mm Ø (round shaft), 10...16 mm (square shaft)
Weight	2300 g
Protection class	IP54
Isolation class	III (DAT230F: class II)
Certification	CE

Article	Supply voltage	Power consumption	Auxiliary switch
DAT24F	24 V AC / DC	Operating: 5.0 W. Maintenance: 2.5 W	-
DAT24FS	24 V AC / DC	Operating: 5.0 W. Maintenance: 2.5 W	2 x 3 (1,5) A / AC 230 V
DAT230F	230 V AC	Operating: 6.5 W. Maintenance: 2.5 W	-
DAT230FS	230 V AC	Operating: 6.5 W. Maintenance: 2.5 W	2 x 3 (1,5) A / AC 230 V

DAMPER ACTUATORS WITH SPRING RETURN FOR FIRE DAMPERS, 5 Nm

Well-suited for applications with security / fire dampers used as antifreeze, antismoke or for sealing in the hygienic-sanitary field.



AF230SE

Technical data	
Max. damper size	1 m ²
Torque	5 Nm
Frequency	50...60 Hz
Thermal sensor	Duct 72°C
Running time, actuator	50...70 s
Running time, spring return	< 20 s
Rotation angle	90°
Ambient temperature	-20...+50 °C
Ambient humidity	5...95 % RH
Noise level	Max < 45 dB
Mounting	Directly on jack shaft
For jack shaft	12 mm (square shaft)
Protection class	IP54
Isolation class	II
Certification	CE

Article	Supply voltage	Power consumption	Auxiliary switch	Weight
AF24SE	24 V AC / DC	Operating: 7.2 W. Maintenance: 2.5 W	2 x SPDT fixed 3 (1.5) A / AC 230 V	1800 g
AF230SE	230 V AC	Operating: 4.2 W. Maintenance: 2.5 W	2 x SPDT fixed 3 (1.5) A / AC 230 V	1900 g

DAMPER ACTUATORS WITH SPRING RETURN FOR FIRE DAMPERS, 8 Nm

Well-suited for applications with security / fire dampers used as antifreeze, antismoke or for sealing in the hygienic-sanitary field.

Technical data	
Max. damper size	1.5 m ²
Torque	8 Nm
Frequency	50...60 Hz
Thermal sensor	Duct 72°C
Running time, actuator	75...95 s
Running time, spring return	< 25 s
Rotation angle	90°
Ambient temperature	-20...+50 °C
Ambient humidity	5...95 % RH
Noise level	Max < 45 dB
Mounting	Directly on jack shaft
For jack shaft	12 mm (square shaft)
Protection class	IP54
Isolation class	II
Certification	CE



NF24SE

Article	Supply voltage	Power consumption	Auxiliary switch	Weight
NF24SE	24 V AC / DC	Operating: 7.0 W Maintenance: 2.0 W	2 SPDT fixed 3 (1.5) A / AC 230 V	2200 g
NF230SE	230 V AC	Operating: 8.0 W Maintenance: 5.5	2 SPDT fixed 3 (1.5) A / AC 230 V	2300 g

POSITION TRANSDUCER

Article	Supply voltage	Output signal	Control signal	Mounting
DB-PA	24 V AC/DC	0(2)...10 V DC ($R_{load} > 6K8$) (control override)	0(2)...10 V DC	Wall
DB-PF	24 V AC/DC	0(2)...10 V DC ($R_{load} > 6K8$) (control override)	0(2)...10 V DC	Front-end





DB-PA



DB-PF

8 Valves and valve actuators

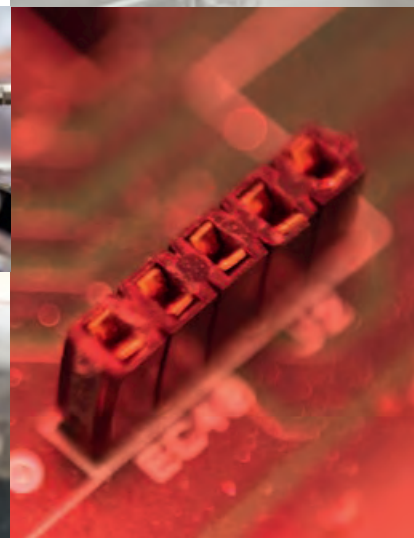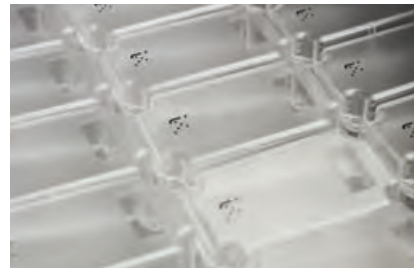




X	Recommended choice
♦	Other possible alternative

ACTUATORS AND VALVE BODIES COUPLING

					SM	FCA	SEB	
					synchronous, spring return 24 V AC/230 V AC	synchronous, spring return 230 V AC	On/off (3-wire), 24/230 V AC 0...10 V, 24 V AC	
							4 Nm	5Nm
	DB-VZ	Internally threaded 2-, 3-way		DN 15-25	X			
	FCV	Internally threaded 2-, 3-way		DN 15-32		X		
	VFBV	Internally threaded 2-, 3-way	90°	DN 15-50			X	
				DN 32-50				X
	VFX2	Externally threaded 2-way	stroke 2.5 mm	DN 15-20				
	VFX3	Externally threaded 3-way						
	VFX4	Externally threaded 3-way, 4 port						
	VFP1 VPIM VFP1	Pressure independent valves	stroke 2.7mm	DN 15-25				
	VFMD2 VFMD3	Externally threaded 2-, 3-way	stroke 5.5 mm	DN 15-40				
	VFTRB2 VFTRB3	Internally threaded 2-, 3-way	stroke 5.5 mm	DN 25-40				
	VFTR2 VFTR3	Externally threaded 2-, 3-way	stroke 5.5 mm	DN 15-25				
	VFBF2 VFBF3	Internally threaded 2-, 3-way	stroke 20 mm	DN 15-50				
	VFG2 VFG2...N VFG3	Internally threaded 2-, 3-way	stroke 20 mm	DN 15-50				
	VFD2 VFD3	Externally threaded 2-, 3-way	stroke 20 mm	DN 15-50				
	VFFG2 VFFG3	Flanged, 2-way 3-way	stroke 20 mm	DN 25-40				
			stroke 20 mm	DN 50-65				
			stroke 40 mm	DN 80-200				
	VFL2 VFL3	Flanged, 2-way 3-way	stroke 20 mm	DN 65-80				
			stroke 40 mm	DN 100-150				
			stroke 20 mm	DN 65-80				
			stroke 40 mm	DN 100-150				
	VFDH	Flanged, 2-way	stroke 20 mm	DN 15-50				
			stroke 20 mm	DN 65-80				
			stroke 38 mm	DN 100				
			stroke 40 mm	DN 125-150				
	VF	2-way, butterfly valve		DN 32-80				

CALCULATION OF K_{vs} VALUE

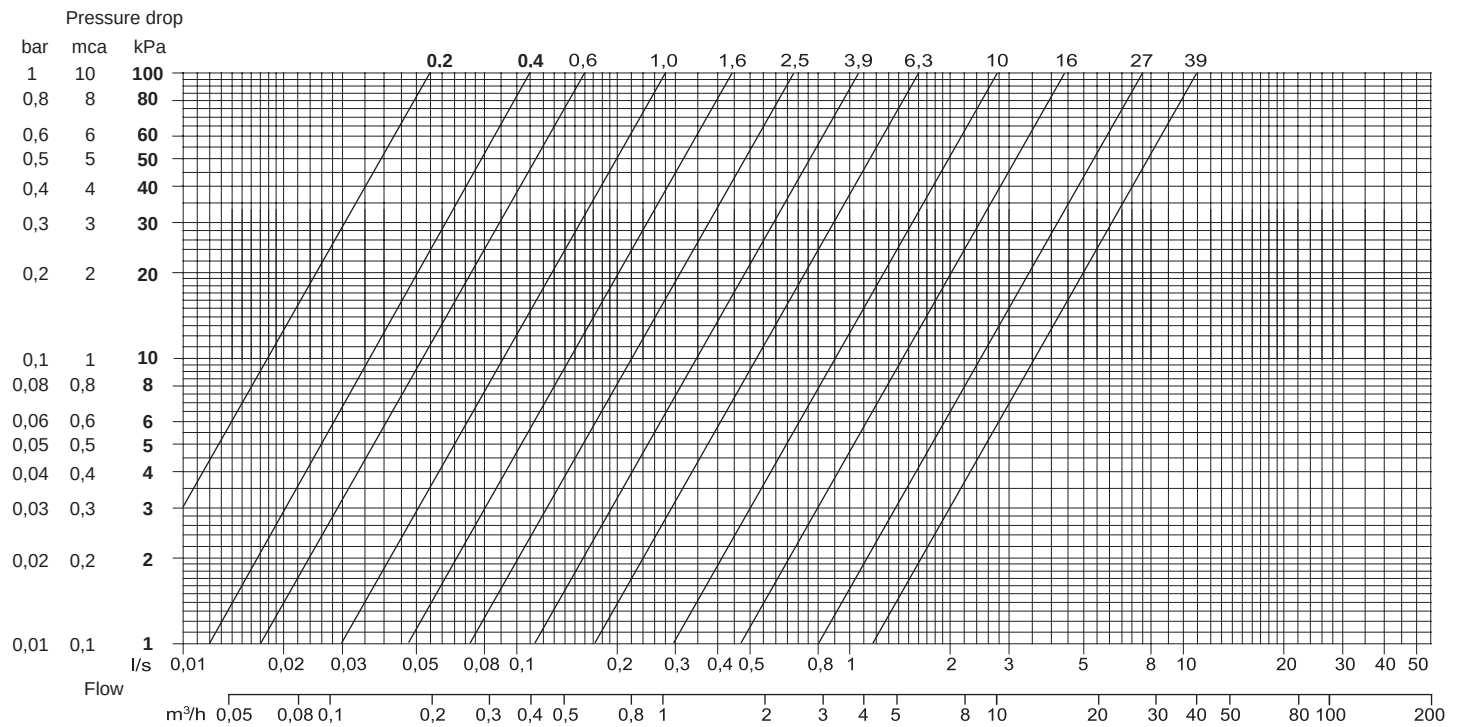


The **pressure drop diagram** allows the Calculation of K_{vs} for a regulation valve. It correlates the flow rate with the pressure drop. The axes use a logarithmic scale so that you can represent any of K_{vs} value with a straight line.

Example:

TO CHOOSE A K_{vs} VALUE FOR A VALVE HAVING A PRESSURE DROP OF 80 KPA AND A FLOW RATE OF 0,2 L/S:

- Draw a horizontal line corresponding to the pressure drop value (DP = 80 kPa)
- Draw a vertical line in correspondance of the flow rate value (0,2 l / s)
- Then draw a straight line from the intersection formed up to the nearest K_{vs} line
- Read the value of the corresponding K_{vs}
- Result: 1.0 K_{vs}

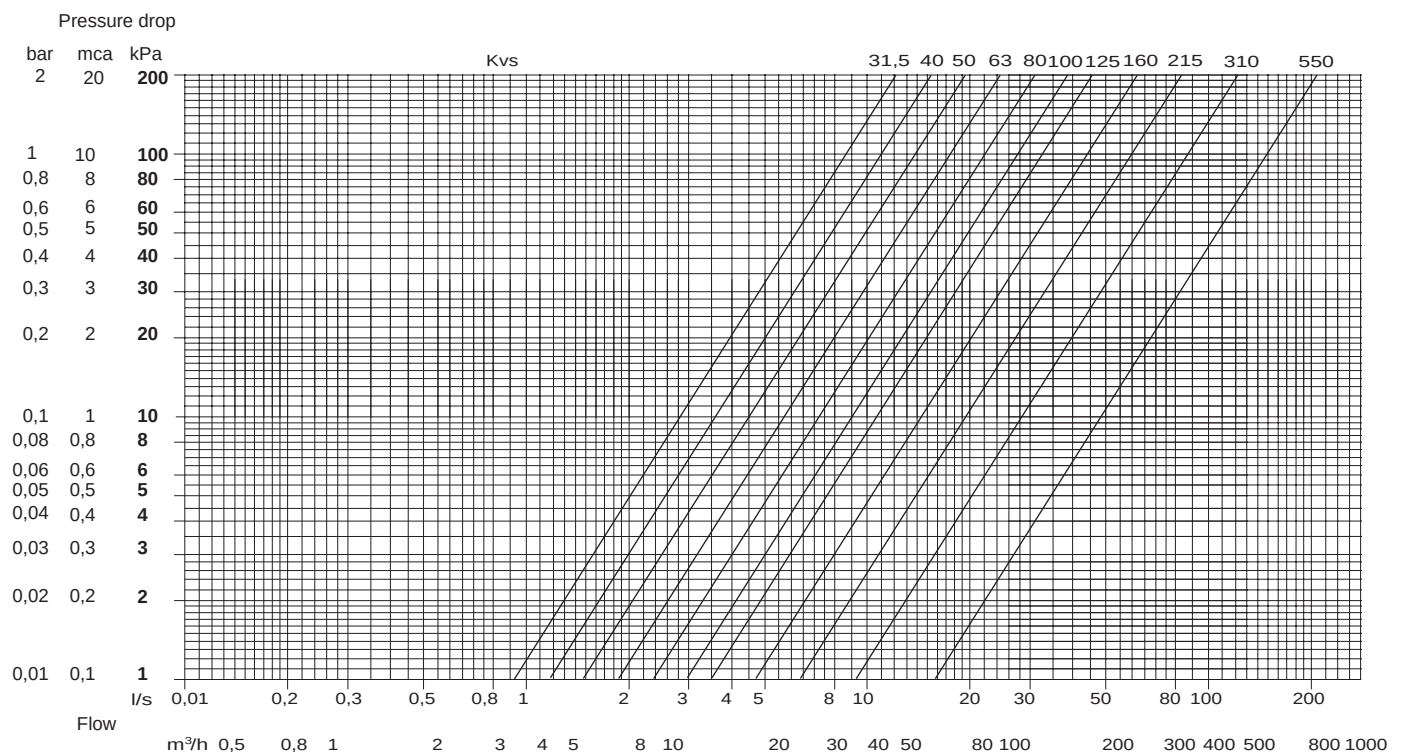

THERMAL ACTUATORS FOR MANIFOLDS AND VALVES

Thermal actuator to be used on manifolds

Technical data	
Sensor element	Special wax
Power consumption	3 VA
Ambient temperature	0...50 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-10...+60 °C Humidity: < 95 % RH
Peak current	SE1C24, SE1C24S < 0.25 A SE1C230, SE1C230S < 1 A
Auxiliary switch	3 A 230 V AC
Cable	PVC, section 2(4) x 0.50 mm ² , length 1 m
Connection, actuator	Metal ring M30 x 1.5
Material, casing	Matt polycarbonate, self extinguishing V0 - V1 according to UL94
Weight	150 g
Dimensions	Ø 48.5 x h 65 mm
Protection class	IP40 If mounted vertically: IP44 clas II (SE1C230, SE1C230S) class III (SE1C24, SE1C24S)
Control signal	On/Off

Article	Supply voltage	Auxiliary switch	Stroke time
SE1C24	24 V AC ± 10%, 50/60 Hz	-	4.5 min (20°C)
SE1C230	230 V AC ± 10%, 50/60 Hz	-	3.5 min (20°C)
SE1C24S	24 V AC ± 10%, 50/60 Hz	X	4.5 min (20°C)
SE1C230S	230 V AC ± 10%, 50/60 Hz	X	3.5 min (20°C)

ACCESSORIES

Article	Actuator	Description
ADVFX	SE1C...	Adapter for SE1C/VFX coupling up to Kvs 2.5 to allow the valve to be normally open on direct way
ADV11	SE1C...	Adapter for VFP valves (actuator connection from M28 to M30)



Articles available in multipack /M: SE1C.../M (72 pcs.)
Adapters must be ordered separately.



SE1C



ADVFX



ADV11

ON-OFF ZONE VALVES

On/off control of heat or cool water flow. The valves must be combined with the SM actuator.



DB-VZ2-20

Technical data valve

Storage temperature	-20...+70 °C
Humidity	< 95 % RH
Media temperature	0...105 °C
Nominal pressure (PN)	16 bar
Weight	270...750 g

Material

Body	Forged brass
Stem	Stainless steel AISI 302
Packing	NBR

2-WAY VALVES

Article	Nominal diameter	Connection	Kvs	Max. diff. pressure
DB-VZ2-15	DN15	G 1/2"	1.6 m³/h	250 kPa (2,5 bar)
DB-VZ2-20	DN20	G 3/4"	3.5 m³/h	100 kPa (1 bar)
DB-VZ2-25	DN25	G 1"	5.5 m³/h	60 kPa (0,6 bar)

3-WAY VALVES

Article	Nominal diameter	Connection	Kvs	Max. diff. pressure
DB-VZ3-15	DN15	G 1/2"	1.6 m³/h	250 kPa (2,5 bar)
DB-VZ3-20	DN20	G 3/4"	3.5 m³/h	100 kPa (1 bar)
DB-VZ3-25	DN25	G 1"	5.5 m³/h	60 kPa (0,6 bar)

ACTUATOR FOR DB-VZ ON-OFF ZONE VALVES

Actuators with auxiliary microswitch for 2-way and 3-way DB-VZ valves.

Technical data actuator	
Power consumption	7 VA
Load	max. 3A, 125...250 V AC
Opening time	≤ 10 s
Closing time, spring	≤ 5 s
Ambient temperature	2...60 °C
Ambient humidity	10...90 % RH (non-condensing)
Material, casing base	Aluminium alloy casting
Material, casing cover	Fire-proof ABS
Dimensions	77 x 65 x 62 mm
Protection class	IP40
Isolation class	II



SM24-CA

ACTUATORS

Article	Supply voltage	Auxiliary switch
SM230/CA	230 V AC ± 10%	X
SM24/CA	24 V AC ± 10%	X

PRESSURE INDEPENDENT CONTROL VALVES, DN15-25, 2.7 MM STROKE

The valve is a combined differential pressure regulator, flow limiter and equal percentage control valve with full stroke and authority. The pressure independent control valves are suitable for constant or variable temperature systems and can be used as constant flow limiters in constant volume systems (with no actuators), or as pressure independent control valves in variable volume systems (with actuators).

The VFPIP / VFPI / VFPI valves DN15-25 are intended to be used together with ITK's SE1Cxxx or SE1.2xxx actuators.



VFPI15



VFPIP15



VFPI15

Technical data

Application	Heating/cooling systems, fan coil units, radiant cooling and ventilation
Pressure class	25 bar
Flow characteristics	Equal percentage
Rangeability	50 ~ 100 : 1
Max. diff. pressure	600 kPa
Stroke	2,7 mm
Media	Hot water, cold water, glycol-mixed water (max. 50 % glycol)
Max. leakage	0.01 % of maximum flow, Class IV IEC 60534-4
Media temperature	-10...+120 °C

Material

Body	Brass CW602N (CZ121)
Plug parabol	Brass CW614N (CZ132)
Stem	Stainless steel
O-rings	EPDM
Pressure controller	EPDM, stainless steel and high resistance polymer

MODELS WITHOUT MEASURING PORT CONNECTORS

Article	Nominal diameter	Connection	Max. flow rate	Max. start up pressure	Rangeability	Stroke	Actuator
VFPI15-150	DN15	G½"	150 l/h	20 kPa	50 ~ 100 : 1	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT
VFPI15-600	DN15	G½"	600 l/h	25 kPa	50 ~ 100 : 1	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT
VFPI15-900	DN15	G½"	900 l/h	30 kPa	50 ~ 100 : 1	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT
VFPI20-600	DN20	G¾"	600 l/h	25 kPa	50 ~ 100 : 1	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT
VFPI20-900	DN20	G¾"	900 l/h	30 kPa	50 ~ 100 : 1	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT



The VFPI models are non-stock items.

MODELS WITHOUT MEASURING PORT, WITH MEASURING PORT CONNECTORS

Article	Nominal diameter	Connection	Max. flow rate	Max. start up pressure	Range-ability	Max. diff. pressure	Stroke	Actuator
VFPIP15-150	DN15	G1/2"	150 l/h	20 kPa	50 ~ 100 : 1	600 kPa	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT
VFPIP15-600	DN15	G1/2"	600 l/h	25 kPa	50 ~ 100 : 1	600 kPa	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT
VFPIP15-780	DN15	G1/2"	780 l/h	35 kPa	50 ~ 100 : 1	600 kPa	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT
VFPIP20-1000	DN20	G3/4"	1000 l/h	30 kPa	50 ~ 100 : 1	600 kPa	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT
VFPIP20-1500	DN20	G3/4"	1500 l/h	35 kPa	50 ~ 100 : 1	600 kPa	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT
VFPIP25-1500	DN25	G1"	1500 l/h	35 kPa	50 ~ 100 : 1	600 kPa	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT

MODELS WITH MEASURING PORTS

Article	Nominal diameter	Connection	Max. flow rate	Max. start up pressure	Range-ability	Stroke	Actuator
VFPI15-150	DN15	G1/2"	150 l/h	20 kPa	50 ~ 100 : 1	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT
VFPI15-600	DN15	G1/2"	600 l/h	25 kPa	50 ~ 100 : 1	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT
VFPI15-780	DN15	G1/2"	780 l/h	35 kPa	50 ~ 100 : 1	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT
VFPI20-1000	DN20	G3/4"	1000 l/h	30 kPa	50 ~ 100 : 1	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT
VFPI20-1500	DN20	G3/4"	1500 l/h	35 kPa	50 ~ 100 : 1	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT
VFPI25-1500	DN25	G1"	1500 l/h	35 kPa	50 ~ 100 : 1	2.7 mm	SE1C230, SE1C24, SE1.2F24/PT, SE1.2F230/PT, SE1.2M24-3.2/PT

ELECTROMECHANICAL ACTUATORS FOR THE PCTV, PCTVM AND PCTVS VALVES

Technical data	
Max. media temperature	95 °C
Ambient temperature	0...50 °C
Protection class	IP43
Force	120 N +30% -20%
Stroke time	8 s/mm



SE1.2xxxx/PT

MODELS

Article	Control signal	Stroke	Supply voltage	Power consumption
SE1.2F24/PT	3-point	6 mm (max.)	24 V AC	1.5 W / 2.5 VA
SE1.2F230/PT	3-point	6 mm (max.)	230 V AC	2.2 W / 6.5 VA
SE1.2M24-3.2/PT	0...10 V	6 / 3.2 mm	24 V AC	1.5 W / 2.5 VA

Accessories

Article	Actuator	Description
ADV12	SE1.2	Adapter for VFP valves (actuator connection from M28 to M30)



ADV12

2- AND 3-WAY ON/OFF VALVES, DN15-32, KVS 3.2-10

Valves intended for on/off control of hot or cold water in heating or cooling systems. The valves can only be used together with FCA actuators and are available as both 2- and 3-way models.

Technical data	
Application	Heating systems, cooling systems, fan-coil units, ventilation systems
Max. leakage	0 % of the kvs value
Media	Hot water, cold water, glycol-mixed water (max. 50 % glycol)
Media temperature	2...94 °C
Pressure rating	PN16 (240 psi)
Connection	Internal thread BSP according to ISO 228/1
Material	
Body	Brass CW614N
Ball	EPDM
O-rings	EPDM

2-WAY

Article	Nominal diameter	Connection	Kvs	Max. diff. pressure	Actuator
FCV-215	DN15	G1/2"	3.2 m³/h	200 kPa	FCA-2
FCV-220	DN20	G3/4"	4.6 m³/h	150 kPa	FCA-2
FCV-225	DN25	G1"	5.7 m³/h	100 kPa	FCA-2
FCV-232	DN32	G1 1/4"	10 m³/h	80 kPa	FCA-2

3-WAY

Article	Nominal diameter	Connection	Kvs	Max. diff. pressure	Actuator
FCV-315	DN15	G1/2"	3.2 m³/h	150 kPa	FCA-3
FCV-320	DN20	G3/4"	4.6 m³/h	100 kPa	FCA-3
FCV-325	DN25	G1"	5.7 m³/h	100 kPa	FCA-3
FCV-332	DN32	G1 1/4"	8.4 m³/h	80 kPa	FCA-3



FCV-220



FCV-320

ACTUATORS FOR INTERNALLY THREADED 2- AND 3-WAY VALVES

Actuator intended for on/off control of hot or cold water in heating or cooling systems. The actuator has a synchronous motor and spring return mechanism. It is intended for use together with Industrietechnik's FCV valves.



FCA-2

Technical data	
Supply voltage	230 V AC, 50...60 Hz
Control signal	On/off
Power consumption	6 VA
Opening time	Approx. 15 s
Closing time, spring	4...5 s
Ambient temperature	0...60 °C
Storage temperature	-20...+65 °C
Material	ABS
Dimensions	91 x 68 x 65 mm
Protection class	IP44

Article	Valve
FCA-3	FCV-3
FCA-2	FCV-2

2-WAY, 3-WAY AND 3-WAY (BYPASS) ZONE VALVES DN15-20, KVS 0.25-6.0

Valves for control of heating and cooling in fan coil or chilled beams applications. The valves are intended to be used together with the thermal SE1 actuators. They are available as 2- and 3-way versions, as well as bypass versions. The valves have linear flow characteristics.

Technical data

Pressure rating	PN16
Connection	BSP externally threaded according to ISO 228/1
Flow characteristics	Linear
Max. leakage	0 % of the kvs value
Media	Hot water, cold water, glycol-mixed water (max. 40 % glycol)
Media temperature	2...95 °C
Stroke	2.5 mm

Material

Body	Brass CW614N
Plug	PA + GF
Stem	PA + GF
Spring	Stainless steel
Packing box	PPO + GP
O-rings	FKM



VFX214



VFX237



VFX314



VFX337

2-WAY

Article	Nominal diameter	Connection	Kvs, A-AB	Kvs, B-AB	Max. diff. pressure	Actuator
VFX210	DN15	G1/2"	0.25 m³/h	- m³/h	250 kPa	SE1T / SE1M
VFX211	DN15	G1/2"	0.4 m³/h	- m³/h	250 kPa	SE1T / SE1M
VFX212	DN15	G1/2"	0.6 m³/h	- m³/h	250 kPa	SE1T / SE1M
VFX213	DN15	G1/2"	1.0 m³/h	- m³/h	250 kPa	SE1T / SE1M
VFX214	DN15	G1/2"	1.6 m³/h	- m³/h	250 kPa	SE1T / SE1M
VFX235	DN20	G3/4"	2.5 m³/h	- m³/h	250 kPa	SE1T / SE1M
VFX237	DN20	G3/4"	4.0 m³/h	- m³/h	80 kPa	SE1TP / SE1MP
VFX239	DN20	G3/4"	6.0 m³/h	- m³/h	80 kPa	SE1TP / SE1MP

3-WAY

Article	Nominal diameter	Connection	Kvs, A-AB	Kvs, B-AB	Max. diff. pressure	Actuator
VFX310	DN15	G1/2"	0.25 m³/h	0.25 m³/h	250 kPa	SE1T / SE1M
VFX311	DN15	G1/2"	0.4 m³/h	0.4 m³/h	250 kPa	SE1T / SE1M
VFX312	DN15	G1/2"	0.6 m³/h	0.6 m³/h	250 kPa	SE1T / SE1M
VFX313	DN15	G1/2"	1.0 m³/h	0.8 m³/h	250 kPa	SE1T / SE1M
VFX314	DN15	G1/2"	1.6 m³/h	1.0 m³/h	250 kPa	SE1T / SE1M
VFX335	DN20	G3/4"	2.5 m³/h	1.6 m³/h	250 kPa	SE1T / SE1M
VFX337	DN20	G3/4"	4.0 m³/h	2.5 m³/h	80 kPa	SE1TP / SE1MP
VFX339	DN20	G3/4"	6.0 m³/h	4.0 m³/h	80 kPa	SE1TP / SE1MP

3-WAY WITH BYPASS

Article	Nominal diameter	Connection	Kvs, A-AB	Kvs, B-AB	Max. diff. pressure	Actuator
VFX410	DN15	G1/2"	0.25 m³/h	0.25 m³/h	250 kPa	SE1T / SE1M
VFX411	DN15	G1/2"	0.4 m³/h	0.4 m³/h	250 kPa	SE1T / SE1M
VFX412	DN15	G1/2"	0.6 m³/h	0.6 m³/h	250 kPa	SE1T / SE1M
VFX413	DN15	G1/2"	1.0 m³/h	0.8 m³/h	250 kPa	SE1T / SE1M
VFX414	DN15	G1/2"	1.6 m³/h	1.0 m³/h	250 kPa	SE1T / SE1M
VFX435	DN20	G3/4"	2.5 m³/h	1.6 m³/h	250 kPa	SE1T / SE1M
VFX437	DN20	G3/4"	4.0 m³/h	2.5 m³/h	80 kPa	SE1TP / SE1MP
VFX439	DN20	G3/4"	6.0 m³/h	4.0 m³/h	80 kPa	SE1TP / SE1MP

ACCESSORIES

Article	Description
VTP	Override control
ADVFX	Adapter for SE1C/VFX coupling up to Kvs 2.5 to allow the valve to be normally open on direct way



Articles available in multipack /M: VFX21.../M (140 pcs.); VFX31.../M (120 pcs.); VFX 41.../M (100pcs.); VFX235/M (136 pcs.) VFX335/M (120 pcs.); VFX435/M (80 pcs.)



VFX437



VFX414



VTP



ADVFX

THERMAL ACTUATORS 100/140 N, 2.5 MM STROKE

Thermal actuator with position indicator for control of valves in heating or cooling systems. The actuator can be used to control radiator circuits, solar heating systems, heating or cooling coils, floor heating etc. To be combined with the VFX range of valves.

Technical data	
Stroke	2.5 mm
Ambient temperature	0...50 °C
Ambient humidity	10...90 % RH (non-condensing)
Storage temperature	-20...+70 °C
Storage humidity	< 95 % RH (non-condensing)
Closing/opening time	SE1T230, SE1TP230: 210 s / SE1T24, SE1TP24: 270 s
Peak current	24 V AC: < 0.25 A / 230 V AC: < 0.90 A
Auxiliary switch	250 V AC 3 A
Cable	PVC, section 2 x 0.50 mm², 2 m length
Connection	M30 x 1.5 metal ring
Material, casing	Matt polycarbonate, self extinguishing V0 - V1 according to UL94
Weight	200 g
Dimensions	Ø 40 x 61 mm
Protection class	IP40 (IP44 when vertically mounted)
Isolation class	II (SE1T230, SE1TP230) III (SE1T24, SE1TP24, SE1M24 e SE1MP24)

Article	Force	Supply voltage	Control signal	Power consumption	Stroke time	Auxiliary switch
SE1T24	100 N	24 V AC ± 10 %, 50/60 Hz	On/Off	3.0 VA	4.5 min	-
SE1T24S	100 N	24 V AC ± 10 %, 50/60 Hz	On/Off	3.0 VA	4.5 min	X
SE1T230	100 N	230 V AC ± 10 %, 50/60 Hz	On/Off	3.0 VA	3.5 min	-
SE1TP24	140 N	24 V AC ± 10 %, 50/60 Hz	On/Off	3.0 VA	4.5 min	-
SE1TP24S	140 N	24 V AC ± 10 %, 50/60 Hz	On/Off	3.0 VA	4.5 min	X
SE1TP230	140 N	230 V AC ± 10 %, 50/60 Hz	On/Off	3.0 VA	3.5 min	X
SE1T230S	100 N	230 V AC ± 10 %, 50/60 Hz	On/Off	3.0 VA	3.5 min	X
SE1TP230S	140 N	230 V AC ± 10 %, 50/60 Hz	On/Off	3.0 VA	3.5 min	X
SE1MP24	140 N	24 V AC ± 10 %, 50/60 Hz	0...10 V DC	3.5 VA	3.5 min	-
SE1M24	100 N	24 V AC ± 10 %, 50/60 Hz	0...10 V DC	3.5 VA	4.5 min	-



SE1T230



SE1T230S



SE1M24

2-WAY CONTROL VALVES, DN15-50, KVS 0.6-39, 20 MM STROKE

The valves are designed for control of hot, cold or glycol-mixed water in heating and ventilation systems. They are pressure balanced (from DN20-50, not DN15) and can therefore handle high differential pressure with low force. The valves are intended to be used together with Industrietchnik's SE5... actuators. They should not be used in domestic water systems.



VFG2

Technical data	
Pressure rating	PN16
Connection	BSP internally threaded according to ISO 228/1
Flow characteristics	Equal percentage
Max. leakage	0 % of the Kvs value (PTFE gasket, carbon-filled 25 %, no leakage)
Max. diff. pressure	1600 kPa (16 bar)
Media	Hot water, cold water, glycol-mixed water (max. 50 % glycol)
Media temperature	-5...+140 °C
Rangeability	100:1
Stroke	20 mm
Material	
Body	Brass CW614N
Seat	Brass CW614N
Plug	Stainless steel 1.4301
Stem	Stainless steel 1.4305
Seat packing	PTFE with 25 % carbon
O-rings	EPDM

MODELS

Article	Nominal diameter	Connection	Kvs	Actuator
VFG215-0,6	DN15	G½"	0.6 m³/h	SE5
VFG215-1,0	DN15	G½"	1.0 m³/h	SE5
VFG215-1,6	DN15	G½"	1.6 m³/h	SE5
VFG215-2,5	DN15	G½"	2.5 m³/h	SE5
VFG215-4,0	DN15	G½"	4.0 m³/h	SE5
VFG220-1,6	DN20	G¾"	1.6 m³/h	SE5
VFG220-2,7	DN20	G¾"	2.7 m³/h	SE5
VFG220-3,9	DN20	G¾"	3.9 m³/h	SE5
VFG220-6,3	DN20	G¾"	6.3 m³/h	SE5
VFG225-6,3	DN25	G1"	6.3 m³/h	SE5
VFG225-10	DN25	G1"	10 m³/h	SE5
VFG232-10	DN32	G1¼"	10 m³/h	SE5
VFG232-16	DN32	G1¼"	16 m³/h	SE5
VFG240-10	DN40	G1½"	10 m³/h	SE5
VFG240-16	DN40	G1½"	16 m³/h	SE5
VFG240-27	DN40	G1½"	27 m³/h	SE5
VFG250-27	DN50	G2"	27 m³/h	SE5
VFG250-39	DN50	G2"	39 m³/h	SE5



IS02420001

ACCESSORIES

Article	Description
IS02420001	Spare parts kit, O-ring kit for VFG... valves from DN15 to DN25 (until 2018-12)
IS6321457301	Spare parts kit, packing box, for VFG... valves from DN32 to DN50 (until 2018-12).
IS2921354201	Spare parts kit, packing box, for VFG... (from 2019-01), VFFG (DN25-40), VFBF



IS2921354201



IS6321457301

2- AND 3-WAY EXTERNALLY THREADED CONTROL VALVES, DN15-50, KVS 0.63-39, 20 MM STROKE

Valves designed for control of hot, cold or glycol-mixed water in heating and ventilation systems. They also function very well in domestic water systems. The valves are intended for use together with SE5... actuators. Valves with DN32-50 may also be used with SE10..., if a larger actuating force is required.

Technical data	
Pressure rating	PN16
Connection	BSP internally threaded according to ISO 228/1
Flow characteristics	Equal percentage
Max. leakage	0.1 % of Kvs
Media	Hot, cold, or glycol-mixed water (max. 50 % glycol)
Media temperature	-5...+150 °C
Rangeability	100:1
Stroke	20 mm
Material	
Body	Gunmetal CC491K (RG5)
Seat	Gunmetal CC491K (RG5)
Plug	Gunmetal CC491K (RG5)
Stem	Stainless steel 1.4305
Packing box	Dezincification resistant brass CW 602N
O-rings	Viton

2-WAY VALVES

Article	Nominal diameter	Kvs	Connection	Max. diff. pressure SE5	Max. diff. pressure SE10	Actuator
VFG2..N15-0,63	DN15	0.63 m³/h	G½"	700 kPa	700 kPa	SE5, SE10
VFG2..N15-1,0	DN15	1.0 m³/h	G½"	700 kPa	700 kPa	SE5, SE10
VFG2..N15-1,6	DN15	1.6 m³/h	G½"	700 kPa	700 kPa	SE5, SE10
VFG2..N15-2,1	DN15	2.1 m³/h	G½"	700 kPa	700 kPa	SE5, SE10
VFG2..N15-2,7	DN15	2.7 m³/h	G½"	700 kPa	700 kPa	SE5, SE10
VFG2..N20-4,2	DN20	4.2 m³/h	G¾"	600 kPa	600 kPa	SE5, SE10
VFG2..N20-5,6	DN20	5.6 m³/h	G¾"	600 kPa	600 kPa	SE5, SE10
VFG2..N25-10	DN25	10 m³/h	G1"	500 kPa	500 kPa	SE5, SE10
VFG2..N32-16	DN32	16 m³/h	G1¼"	400 kPa	450 kPa	SE5, SE10
VFG2..N40-27	DN40	27 m³/h	G1½"	300 kPa	400 kPa	SE5, SE10
VFG2..N50-39	DN50	39 m³/h	G2"	200 kPa	300 kPa	SE5, SE10

3-WAY VALVES

Article	Nominal diameter	Kvs	Connection	Max. diff. pressure SE5	Max. diff. pressure SE10	Actuator
VFG315-0,63	DN15	0.63 m³/h	G½"	700 kPa	700 kPa	SE5, SE10
VFG315-1,0	DN15	1.0 m³/h	G½"	700 kPa	700 kPa	SE5, SE10
VFG315-1,6	DN15	1.6 m³/h	G½"	700 kPa	700 kPa	SE5, SE10
VFG315-2,1	DN15	2.1 m³/h	G½"	700 kPa	700 kPa	SE5, SE10
VFG315-2,7	DN15	2.7 m³/h	G½"	700 kPa	700 kPa	SE5, SE10
VFG320-4,2	DN20	4.2 m³/h	G¾"	600 kPa	600 kPa	SE5, SE10
VFG320-5,6	DN20	5.6 m³/h	G¾"	600 kPa	600 kPa	SE5, SE10
VFG325-10	DN25	10 m³/h	G1"	500 kPa	500 kPa	SE5, SE10
VFG332-16	DN32	16 m³/h	G1¼"	400 kPa	450 kPa	SE5, SE10
VFG340-27	DN40	27 m³/h	G1½"	300 kPa	400 kPa	SE5, SE10
VFG350-39	DN50	39 m³/h	G2"	200 kPa	300 kPa	SE5, SE10

ACCESSORIES

Article	Description
IS0603080300	Spare parts kit, packing box for VFD3, VFG2..N and VFG3 valves (until 2019-12) and for VFD2 and VFDH valves.
IS2921357901	Spare parts kit, packing box (from 2020-01)

News!



VFG2..N



VFG3



IS0603080300



S2921357901

2-WAY CONTROL VALVES, DN15-50, KVS 0.25-40, 20 MM STROKE, DZR

2-way valves designed for control of cold, hot or glycol-mixed water, for use in domestic water systems or district heating within the temperature range -5°C...+150°C. They are pressure balanced (from DN20-50, not DN15) and can therefore handle high differential pressure with low force. The valves are intended to be used together with SE5... actuators.



VFD2

Technical data	
Pressure rating	PN16
Connection	BSP externally threaded according to ISO 228/1; supplied with threaded connections
Flow characteristics	Equal percentage
Max. leakage	0 % of the Kvs value (PTFE gasket, carbon-filled 25 %, no leakage)
Media	Hot water, cold water, glycol-mixed water (max. 50 % glycol)
Media temperature	-5...+150 °C
Rangeability	100:1
Stroke	20 mm
Max. diff. pressure	1600 kPa
Material	
Body	Gunmetal CC491K (RG5)
Seat	Stainless steel 1.4301
Plug	Stainless steel 1.4305
Stem	Stainless steel 1.4305
Seat packing	PTFE with 25 % carbon
Packing box	Dezincification resistant brass CW 602N, self-adjusting teflon
O-rings	Viton
Material, connections	
Nut	Malleable cast iron, galvanized
Nipple	Dezincification resistant brass CW 602N
Fitting seal	Novatec Premium 2, Nitrile bonded aramid fibre with graphite

MODELS

Article	Nominal diameter	Kvs	Actuator
VFD215-0,25	DN15	0.25 m³/h	SE5
VFD215-0,4	DN15	0.4 m³/h	SE5
VFD215-0,63	DN15	0.63 m³/h	SE5
VFD215-1,0	DN15	1,0 m³/h	SE5
VFD215-1,25	DN15	1.25 m³/h	SE5
VFD215-1,6	DN15	1.6 m³/h	SE5
VFD215-2,5	DN15	2.5 m³/h	SE5
VFD215-4,0	DN15	4 m³/h	SE5
VFD220-5,0	DN20	5 m³/h	SE5
VFD220-6,3	DN20	6.3 m³/h	SE5
VFD225-8,0	DN25	8 m³/h	SE5
VFD225-10	DN25	10 m³/h	SE5
VFD232-12,5	DN32	12.5 m³/h	SE5
VFD232-16	DN32	16 m³/h	SE5
VFD240-20	DN40	20 m³/h	SE5
VFD240-25	DN40	25 m³/h	SE5
VFD250-31,5	DN50	31.5 m³/h	SE5
VFD250-40	DN50	40 m³/h	SE5

ACCESSORIES

Article	Description
IS0603080300	Spare parts kit, packing box for VFD3, VFG2..N and VFG3 valves (until 2019-12) and for VFD2 and VFDH valves.



IS0603080300

3-WAY CONTROL VALVES DN15-50, KVS 0.63-40, 20 MM STROKE, DZR

Valves intended for control of cold, hot and glycol-mixed water in heating, ventilation and domestic water systems. The valves are intended to be used together with Industrietechnik's SE5... actuators. Valves with DN32-50 may also be used with SE10... if a larger actuating force is required.

Technical data	
Pressure rating	PN16
Connection	BSP externally threaded according to ISO 228/1; supplied with threaded connections
Flow characteristics	Equal percentage
Max. leakage	0.1 % of the kvs value
Media	Hot, cold or glycol-mixed water (max. 50 % glycol)
Media temperature	-5...+150 °C
Rangeability	100:1
Stroke	20 mm
Material	
Body	Gunmetal CC491K (RG5)
Seat	Gunmetal CC491K (RG5)
Plug	Gunmetal CC491K (RG5)
Stem	Stainless steel 1.4305
Packing box	Dezincification resistant brass CW 602N
O-rings	Viton
Material, connections	
Nut	Malleable cast iron, galvanized
Nipple	Dezincification resistant brass CW 602N
Fitting seal	Novatec Premium 2, Nitrile bonded aramid fibre with graphite
Cover lid	Dezincification resistant brass CW 602N



VFD3

MODELS

Article	Nominal diameter	Kvs	Max. diff. pressure(SE5)	Max. diff. pressure(SE10)	Actuator
VFD315-0,63	DN15	0.63 m³/h	700 kPa	700 kPa	SE5, SE10
VFD315-1,25	DN15	1.25 m³/h	700 kPa	700 kPa	SE5, SE10
VFD315-1,6	DN15	1.6 m³/h	700 kPa	700 kPa	SE5, SE10
VFD315-2,5	DN15	2.5 m³/h	700 kPa	700 kPa	SE5, SE10
VFD315-4,0	DN15	4 m³/h	700 kPa	700 kPa	SE5, SE10
VFD320-5,0	DN20	5 m³/h	600 kPa	600 kPa	SE5, SE10
VFD320-6,3	DN20	6.3 m³/h	600 kPa	600 kPa	SE5, SE10
VFD325-8,0	DN25	8 m³/h	500 kPa	500 kPa	SE5, SE10
VFD325-10	DN25	10 m³/h	500 kPa	500 kPa	SE5, SE10
VFD332-12,5	DN32	12.5 m³/h	400 kPa	450 kPa	SE5, SE10
VFD332-16	DN32	16 m³/h	400 kPa	450 kPa	SE5, SE10
VFD340-20	DN40	20 m³/h	300 kPa	400 kPa	SE5, SE10
VFD340-25	DN40	25 m³/h	300 kPa	400 kPa	SE5, SE10
VFD350-31,5	DN50	31.5 m³/h	200 kPa	300 kPa	SE5, SE10
VFD350-40	DN50	40 m³/h	200 kPa	300 kPa	SE5, SE10

ACCESSORIES

Article	Description
IS0603080300	Spare parts kit, packing box for VFD3, VFG2 and VFG3 valves (until 2019-12) and for VFD2 and VFDH valves.
IS2921357901	Spare parts kit, packing box (form 2020-01)



IS0603080300



S2921357901

2- AND 3-WAY CONTROL VALVES, DN25-200, KVS 6.3-550, DIN-STANDARD

Control valves for use in heating, cooling and ventilation systems. They are intended to be used together with SE actuators. The valves have DIN-standard lengths.

Technical data	
Pressure rating	PN16
Connection	Flanged according to EN 1092-2
Flow characteristics	A - AB = equal percentage, B - AB = linear
Max. leakage	0 % of Kvs
Media	Hot water, cold water, glycol-mixed water (max. 50 % glycol)
Media temperature	-5...+120 °C
Rangeability	100:1 (DN50...200), > 50:1 (DN25...40)
Max. diff. pressure	If a smaller actuator than the suggested one is used, the max. differential pressure may be different. More information is available in the product sheet.
Material	
Body	Cast iron Grade 250
Plug	Gunmetal 1400 LG2 (DN50...200), Brass CW614N (DN25...40)
Seat	Gunmetal 1400 LG2 (DN50...200), Cast iron Grade 250 (DN25...40)
Stem	Stainless steel 1.4305
Packing box	Brass CW614N
Bonnet	Brass CW614N
O-rings	EPDM
Packing	Aramid reinforced rubber



VFFG2



VFFG3

2-WAY VALVES

Article	Kvs	Nominal diameter	Max. diff. pressure	Actuator
VFFG225-6,3	6.3 m³/h	DN25	400 kPa	SE5, SE10
VFFG225-10	10 m³/h	DN25	400 kPa	SE5, SE10
VFFG232-10	10 m³/h	DN32	350 kPa	SE5, SE10
VFFG232-16	16 m³/h	DN32	350 kPa	SE5, SE10
VFFG240-16	16 m³/h	DN40	300 kPa	SE5, SE10
VFFG240-25	25 m³/h	DN40	300 kPa	SE5, SE10
VFFG250-31,5	31.5 m³/h	DN50	450 kPa	SE18
VFFG250-40	40 m³/h	DN50	450 kPa	SE18
VFFG265-50	50 m³/h	DN65	350 kPa	SE18
VFFG265-63	63 m³/h	DN65	350 kPa	SE18
VFFG280-80	80 m³/h	DN80	300 kPa	SE18
VFFG280-100	100 m³/h	DN80	300 kPa	SE18
VFFG2100-125	125 m³/h	DN100	200 kPa	SE18
VFFG2100-160	160 m³/h	DN100	200 kPa	SE18
VFFG2125-215	215 m³/h	DN125	120 kPa	SE25
VFFG2150-310	310 m³/h	DN150	100 kPa	SE25
VFFG2200-550	550 m³/h	DN200	200 kPa	SE25

3-WAY VALVES

Article	Kvs	Nominal diameter	Max. diff. pressure	Actuator
VFFG325-6,3	6.3 m³/h	DN25	400 kPa	SE5, SE10
VFFG325-10	10 m³/h	DN25	400 kPa	SE5, SE10
VFFG332-10	10 m³/h	DN32	350 kPa	SE5, SE10
VFFG332-16	16 m³/h	DN32	350 kPa	SE5, SE10
VFFG340-16	16 m³/h	DN40	300 kPa	SE5, SE10
VFFG340-25	25 m³/h	DN40	300 kPa	SE5, SE10
VFFG350-31,5	31.5 m³/h	DN50	450 kPa	SE18
VFFG350-40	40 m³/h	DN50	450 kPa	SE18
VFFG365-50	50 m³/h	DN65	350 kPa	SE18
VFFG365-63	63 m³/h	DN65	350 kPa	SE18
VFFG380-80	80 m³/h	DN80	300 kPa	SE18
VFFG380-100	100 m³/h	DN80	300 kPa	SE18
VFFG3100-125	125 m³/h	DN100	200 kPa	SE18
VFFG3100-160	160 m³/h	DN100	200 kPa	SE18
VFFG3125-215	215 m³/h	DN125	120 kPa	SE25
VFFG3150-310	310 m³/h	DN150	100 kPa	SE25
VFFG3200-550	550 m³/h	DN200	70 kPa	SE25

ACCESSORIES

Article	Description
02133005	Washer for actuator, 3 mm thick with ø14 mm hole. For SE5 and SE10 DN50-65-valves.
IS2921354201	Spare parts kit, packing box, for VFG2 (from 2019-01), VFFG (DN25-40), VFBF
IS2921351201	Spare parts kit, packing box DN50-200



For the use of DN 50 and DN65 valves with the SE5 and SE10 actuators, accessory 02133005 is required (to be ordered separately).



02133005



IS2921354201



IS2921351201

2- AND 3-WAY DIN-STANDARD FLANGED VALVE

Control valves intended for use in heating, cooling and ventilation systems. They are intended to be used together with the SE 18, SE 25 actuators. The valves have DIN-standard lengths.

Technical data	
Pressure rating	PN16
Connection	Flanged according to EN 1092-2
Flow characteristics	A → AB: 0-30 % open = linear, 30 - 100 % open = equal percentage B → AB: linear
Max. leakage	A - AB: DN65...DN80 = max 0.1 % of the kvs value, DN100...DN150 = max 0.2 % of the kvs value B - AB: Max 2 % of the kvs value
Media	Hot water, cold water, glycol-mixed water (max. 50 % glycol)
Media temperature	-5...+120 °C
Rangeability	100:1
Material	
Body	Cast iron Grade 200
Seat	Cast iron Grade 200
Plug	Stainless steel 1.4301
Stem	Stainless steel 1.4301
Packing box	Brass CW 617N
Bonnet	Cast iron Grade 200
O-rings	EPDM
Packing	Aramid reinforced rubber



VFL2



VFL3

2- AND 3-WAY VALVES

Article	Nominal diameter	Kvs	Max. diff. pressure (SE18)	Max. diff. pressure (SE25)	Actuator
VFL265-52	DN65	52 m³/h	1600 kPa	1600 kPa	SE18, SE25
VFL80-79	DN80	79 m³/h	1600 kPa	1600 kPa	SE18, SE25
VFL2100-124	DN100	124 m³/h	1600 kPa	1600 kPa	SE18, SE25
VFL2125-200	DN125	200 m³/h	1600 kPa	1600 kPa	SE18, SE25
VFL2150-300	DN150	300 m³/h	1600 kPa	1600 kPa	SE18, SE25
VFL365-52	DN65	52 m³/h	400 kPa	400 kPa	SE18, SE25
VFL380-79	DN80	79 m³/h	300 kPa	300 kPa	SE18, SE25
VFL3100-124	DN100	124 m³/h	200 kPa	260 kPa	SE18, SE25
VFL3125-200	DN125	200 m³/h	130 kPa	160 kPa	SE18, SE25
VFL3150-300	DN150	300 m³/h	80 kPa	120 kPa	SE18, SE25



For the use of DN65 and DN80 valves with the SE18 and SE25 actuators, accessory 02133011 is required (to be ordered separately).



02133011

2-WAY CONTROL VALVES, DN15-150, KVS 1.6-310, DIN-STANDARD

Pressure balanced 2-way valve intended for control of hot, cold or glycol-mixed water, ideal for district heating within the temperature range -5...+185°C. Intended for use with the SE5.../SE10.../SE18.../SE25... actuators.



VFDH

Technical data	
Pressure rating	PN16
Connection	Flanges according to EN 1092-2
Flow characteristics	Equal percentage
Max. leakage	0 % of the kvs value (PTFE gasket, carbon-filled 25 %, no leakage) / 0.05 % of kvs for NTVS...-...M models with metal packing
Media	Hot water, cold water, glycol-mixed water (max. 50 % glycol)
Media temperature	-5...+185 °C
Rangeability	100:1
Max. diff. pressure	1600 kPa
Material	
Body	Nodular cast iron (GJS) EN-JS1050
Seat	Stainless steel 1.4301 or gunmetal CC491K (RG5)
Plug	Stainless steel 1.4305 (DN15...DN100) or gunmetal CC491K (RG5) (DN125...DN150)
Stem	Stainless steel 1.4305
Lining	Stainless steel 1.4301
Seat packing, soft seal	PTFE with 25 % carbon
Seat packing, metal seal	Stainless steel 1.4057
Packing box	Dezincification resistant brass CW 602N, self-adjusting teflon
O-rings	Viton

MODELS

Article	Nominal diameter	Kvs	Stroke	Actuator
VFDH15-1,6	DN15	1.6 m³/h	20 mm	SE5
VFDH15-2,7	DN15	2.7 m³/h	20 mm	SE5
VFDH20-6,3	DN20	6.3 m³/h	20 mm	SE5
VFDH25-10	DN25	10 m³/h	20 mm	SE5
VFDH32-16	DN32	16 m³/h	20 mm	SE5
VFDH40-27	DN40	27 m³/h	20 mm	SE5
VFDH50-39	DN50	39 m³/h	20 mm	SE5
VFDH65-63	DN65	63 m³/h	20 mm	SE10
VFDH80-100	DN80	100 m³/h	20 mm	SE10
VFDH100-160	DN100	160 m³/h	38 mm	SE18
VFDH125-215	DN125	215 m³/h	40 mm	SE25
VFDH150-310	DN150	310 m³/h	40 mm	SE25

ACCESSORIES

Article	Description
IS0603080300	Spare parts kit, packing box for VFD3, VFG2 and VFG3 valves (until 2019-12) and for VFD2 and VFDH valves.



IS0603080300

2- AND 3-WAY CONTROL VALVES, DN15-50, KVS 0.63-40, 20 MM STROKE

Valves designed for control of hot, cold or glycol-mixed water in heating and ventilation systems. The valves are intended for use together with Industrietechnik's SE5.../SE10... actuators.

Technical data	
Application	Heating systems, cooling systems, ventilation systems
Pressure rating	PN16
Connection	BSP internally threaded according to ISO 228/1
Flow characteristics	A - AB = equal percentage, B - AB = linear
Max. leakage	0.1 % of Kvs
Media	Hot water, cold water, glycol-mixed water (max. 50 % glycol)
Media temperature	-5...+140 °C
Rangeability	100:1
Stroke	20 mm
Material	
Body	Brass CW614N
Seat	Brass CW614N
Plug	Brass CW614N
Stem	Stainless steel 1.4305
Packing box	Brass CW614N
O-rings	EPDM



VFBF2



VFBF3

2-WAY VALVES

Article	Nominal diameter	Kvs	Connection	Actuator	Max. diff. pressure SE5	Max. diff. pressure SE10
VFBF215-0.63	DN15	0.63 m³/h	G ½"	SE5, SE10	700 kPa	700 kPa
VFBF215-1.0	DN15	1.0 m³/h	G ½"	SE5, SE10	700 kPa	700 kPa
VFBF215-1.6	DN15	1.6 m³/h	G ½"	SE5, SE10	700 kPa	700 kPa
VFBF215-2.1	DN15	2.1 m³/h	G ½"	SE5, SE10	700 kPa	700 kPa
VFBF215-2.7	DN15	2.7 m³/h	G ½"	SE5, SE10	700 kPa	700 kPa
VFBF220-4.2	DN20	4.2 m³/h	G ¾"	SE5, SE10	600 kPa	600 kPa
VFBF220-5.6	DN20	5.6 m³/h	G ¾"	SE5, SE10	600 kPa	600 kPa
VFBF225-10	DN25	10 m³/h	G 1"	SE5, SE10	500 kPa	500 kPa
VFBF232-16	DN32	16 m³/h	G 1¼"	SE5, SE10	400 kPa	450 kPa
VFBF240-25	DN40	25 m³/h	G 1½"	SE5, SE10	300 kPa	400 kPa
VFBF250-40	DN50	40 m³/h	G 2"	SE5, SE10	200 kPa	300 kPa

3-WAY VALVES

Article	Nominal diameter	Kvs	Connection	Actuator	Max. diff. pressure SE5	Max. diff. pressure SE10
VFBF315-0.63	DN15	0.63 m³/h	G ½"	SE5, SE10	700 kPa	700 kPa
VFBF315-1.0	DN15	1.0 m³/h	G ½"	SE5, SE10	700 kPa	700 kPa
VFBF315-1.6	DN15	1.6 m³/h	G ½"	SE5, SE10	700 kPa	700 kPa
VFBF315-2.1	DN15	2.1 m³/h	G ½"	SE5, SE10	700 kPa	700 kPa
VFBF315-2.7	DN15	2.7 m³/h	G ½"	SE5, SE10	700 kPa	700 kPa
VFBF320-4.2	DN20	4.2 m³/h	G ¾"	SE5, SE10	600 kPa	600 kPa
VFBF320-5.6	DN20	5.6 m³/h	G ¾"	SE5, SE10	600 kPa	600 kPa
VFBF325-10	DN25	10 m³/h	G 1"	SE5, SE10	500 kPa	500 kPa
VFBF332-16	DN32	16 m³/h	G 1¼"	SE5, SE10	400 kPa	450 kPa
VFBF340-25	DN40	25 m³/h	G 1½"	SE5, SE10	300 kPa	400 kPa
VFBF350-40	DN50	40 m³/h	G 2"	SE5, SE10	200 kPa	300 kPa

ACCESSORIES

Article	Description
IS2921354201	Spare parts kit, packing box, for VFG2 (from 2019-01), VFFG (DN25-40), VFBF



IS2921354201

VALVE ACTUATOR, 24 V SUPPLY VOLTAGE AND 3-POINT CONTROL

Valve actuator for control of Industrietechnik's range of valves. Available in models with actuator force of 500, 1000, 1800 or 2500 N. The actuators can be operated manually with the manual override mechanism on the lid.

Technical data	
Supply voltage	24 V AC
Control signal	3-point
Ambient temperature	0...50 °C
Storage temperature	-40...80 °C
Ambient humidity	10...90 % RH
Protection class	IP54

MODELS

Article	Max. power consumption	Force	Stroke	Stroke time
SE5F24	7.8 W / 8.0 VA	500 N	10...30 mm	3 s/mm
SE10F24	6.2 W / 6.7 VA	1000 N	10...30 mm	3 s/mm
SE18F24	10.9 W / 11.7 VA	1800 N	10...52 mm	3 s/mm
SE25F24	10.9 W / 11.7 VA	2500 N	10...52 mm	3 s/mm



SE5



SE10



SE18

VALVE ACTUATOR, 24 V SUPPLY VOLTAGE AND 0(2)...10 V DC CONTROL

Valve actuator with automatic stroke adjustment for control of Industrietechnik's range of valves. Available in models with actuator force of 500, 1000, 1800 or 2500 N. The actuators can be operated manually with the manual override mechanism on the lid.

Technical data	
Supply voltage	24 V AC/DC
Control signal	0...10 V DC or 2...10 V DC (or 4...20 mA with a 500 Ω resistor connected)
Ambient temperature	0...50 °C
Storage temperature	-40...80 °C
Ambient humidity	10...90 % RH
Protection class	IP54

MODELS

Article	Max. power consumption	Force	Stroke	Stroke time
SE5M24	5.1 W / 13.9 VA	500 N	10...30 mm	1.5 s/mm
SE10M24	6.2 W / 17.4 VA	1000 N	10...30 mm	1.5 s/mm
SE18M24	8.6 W / 22.4 VA	1800 N	10...52 mm	3 s/mm
SE25M24	8.6 W / 22.4 VA	2500 N	10...52 mm	3 s/mm



SE25



SE10

VALVE ACTUATOR, 230 V SUPPLY VOLTAGE AND 3-POINT CONTROL

Valve actuator for control of Industrietechnik's range of valves. Available in models with actuator force of 500, 1000, 1800 or 2500 N. The actuators can be operated manually with the manual override mechanism on the lid.

Technical data	
Supply voltage	230 V AC $\pm 15\%$, 50 Hz
Control signal	3-point
Power consumption	15.3 W / 16.5 VA
Ambient temperature	0...50 °C
Storage temperature	-40...+80 °C
Ambient humidity	10...90 % RH
Protection class	IP54

MODELS

Article	Max. power consumption	Force	Stroke	Stroke time
SE5F230	15.3 W / 16.5 VA	500 N	10...30 mm	3 s/mm
SE10F230	15.3 W / 16.5 VA	1000 N	10...30 mm	3 s/mm
SE18F230	15.3 W / 16.5 VA	1800 N	10...52 mm	3 s/mm
SE25F230	15.3 W / 16.5 VA	2500 N	10...52 mm	3 s/mm



SE5



SE10



SE18

2- AND 3-WAY CONTROL VALVES DN15-40, KVS 0.25-25, 5.5 MM STROKE

Externally threaded control valves intended for use in heating and cooling systems together with the SEZ4... series of electromechanical actuators.

Technical data	
Application	Heating systems, cooling systems, fan-coil units, ventilation systems
Pressure rating	PN16
Connection	BSP externally threaded according to ISO 228/1
Flow characteristics	Linear
Max. leakage	0 % of kvs
Media	Hot water, cold water, glycol-mixed water (max. 50 % glycol)
Media temperature	2...110 °C
Rangeability	50:1
Stroke	5.5 mm
Material	
Body	Brass CW614N
Seat	Brass CW614N
Plug	Brass CW614N
Stem	Stainless steel 1.4305
Seat packing	EPDM
O-rings	EPDM
Material, connections	
Nut	Malleable cast iron, galvanized
Nipple	Dezincification resistant brass CW 602N (DN15-DN20), Malleable cast iron (DN25-DN40)
Fitting seal	Novatec Premium 2, Nitrile bonded aramid fibre with graphite
Cover lid	Dezincification resistant brass CW 602N



VFMD2



VFMD3

2-WAY VALVES

Article	Nominal diameter	Kvs	Max. diff. pressure	Actuator
VFMD215-0.25	DN15	0.25 m³/h	400 kPa	SEZ4
VFMD215-0.4	DN15	0.4 m³/h	400 kPa	SEZ4
VFMD215-0.6	DN15	0.6 m³/h	400 kPa	SEZ4
VFMD215-1.0	DN15	1.0 m³/h	400 kPa	SEZ4
VFMD215-1.6	DN15	1.6 m³/h	400 kPa	SEZ4
VFMD215-2.5	DN15	2.5 m³/h	400 kPa	SEZ4
VFMD215-4.0	DN15	4.0 m³/h	400 kPa	SEZ4
VFMD220-6.3	DN20	6.3 m³/h	350 kPa	SEZ4
VFMD225-10	DN25	10 m³/h	200 kPa	SEZ4
VFMD232-16	DN32	16 m³/h	130 kPa	SEZ4
VFMD240-25	DN40	25 m³/h	60 kPa	SEZ4

3-WAY VALVES

Article	Nominal diameter	Kvs	Max. diff. pressure	Actuator
VFMD315-0.25	DN15	0.25 m³/h	400 kPa	SEZ4
VFMD315-0.4	DN15	0.4 m³/h	400 kPa	SEZ4
VFMD315-0.6	DN15	0.6 m³/h	400 kPa	SEZ4
VFMD315-1.0	DN15	1.0 m³/h	400 kPa	SEZ4
VFMD315-1.6	DN15	1.6 m³/h	400 kPa	SEZ4
VFMD315-2.5	DN15	2.5 m³/h	400 kPa	SEZ4
VFMD315-4.0	DN15	4.0 m³/h	400 kPa	SEZ4
VFMD320-6.3	DN20	6.3 m³/h	350 kPa	SEZ4
VFMD325-10	DN25	10 m³/h	200 kPa	SEZ4
VFMD332-16	DN32	16 m³/h	130 kPa	SEZ4
VFMD340-25	DN40	25 m³/h	60 kPa	SEZ4

Accessories

Article	Description
2951352501	Hand wheel



2951352501

2- AND 3-WAY CONTROL VALVES, DN25-40, KVS 8-20, 5.5 MM STROKE

Valves for control of heating and cooling in climate, heating and ventilation systems. They can also control glycol-mixed water in for example liquid recovery systems. The valves are intended to be used together with the SEZ4 actuators. A hand wheel for manual operation is delivered with the valve.

News!

0%



Technical data	
Application	Heating systems, cooling systems, fan coil units, radiant cooling, ventilation systems
Pressure rating	PN16
Connection, actuator	M30 x 1.5
Connection	BSP internally threaded according to ISO 228/1
Flow characteristics	Linear
Max. leakage	0 % of the kvs value
Media	Hot, cold or glycol-mixed water (max. 50 % glycol)
Media temperature	1...110 °C
Rangeability	50:1
Stroke	5.5 mm
Material	
Body	Brass CW614N
Seat	Brass CW614N
Plug	Brass CW614N
Stem	Stainless steel 1.4305
Seat packing	EPDM
O-rings	EPDM



VFTRB2



VFTRB3

2-WAY VALVES

Article	Nominal diameter	Connection	Kvs	Max. diff. pressure	Actuator
VFTRB225-8	DN25	G1"	8 m³/h	200 kPa	SEZ4
VFTRB232-15	DN32	G1 ¼"	15 m³/h	150 kPa	SEZ4
VFTRB240-20	DN40	G1 ½"	20 m³/h	100 kPa	SEZ4

3-WAY VALVES

Article	Nominal diameter	Connection	Kvs	Max. diff. pressure	Actuator
VFTRB325-8	DN25	G1"	8 m³/h	200 kPa	SEZ4
VFTRB332-15	DN32	G1 ¼"	15 m³/h	150 kPa	SEZ4
VFTRB340-20	DN40	G1 ½"	20 m³/h	100 kPa	SEZ4

ACCESSORIES

Article	Description
2951352501	Hand wheel



2951352501

2- AND 3-WAY CONTROL VALVES DN15-25, KVS 0.25-7.0, 5.5 MM STROKE

Valves used for control of hot and cold water in climate, heating and ventilation systems. They can also control glycol-mixed water in for example liquid connected recovery systems. Intended to be used together with the SEZ4 actuators.

Technical data	
Pressure rating	PN16
Connection, actuator	M30 x 1.5
Connection	BSP externally threaded according to ISO 228/1
Flow characteristics	Equal percentage
Max. leakage	0 % of the kvs value
Media temperature	1...110 °C
Media	Hot water, cold water, glycol-mixed water (max. 30 % glycol)
Rangeability	50:1
Stroke	5.5 mm
Material	
Body	Brass CW614N
Seat	Brass CW614N
Plug	Brass CW614N
Stem	Stainless steel 1.4305
Seat packing	EPDM
O-rings	EPDM



VFTR2



VFTR3

2-WAY VALVES

Article	Nominal diameter	Kvs	Connection	Max. diff. pressure	Actuator
VFTR215-0.25	DN15	0.25 m³/h	G1/2"	350 kPa	SEZ4
VFTR215-0.4	DN15	0.4 m³/h	G1/2"	350 kPa	SEZ4
VFTR215-0.6	DN15	0.6 m³/h	G1/2"	350 kPa	SEZ4
VFTR215-1.0	DN15	1.0 m³/h	G1/2"	350 kPa	SEZ4
VFTR215-1.6	DN15	1.6 m³/h	G1/2"	350 kPa	SEZ4
VFTR220-2.0	DN20	2.0 m³/h	G3/4"	250 kPa	SEZ4
VFTR220-2.5	DN20	2.5 m³/h	G3/4"	250 kPa	SEZ4
VFTR220-4.0	DN20	4.0 m³/h	G3/4"	150 kPa	SEZ4
VFTR220-6.0	DN20	6.0 m³/h	G3/4"	150 kPa	SEZ4
VFTR225-7.0	DN25	7.0 m³/h	G1"	70 kPa	SEZ4

3-WAY VALVES

Article	Nominal diameter	Kvs	Connection	Max. diff. pressure	Actuator
VFTR315-0.25	DN15	0.25 m³/h	G1/2"	350 kPa	SEZ4
VFTR315-0.4	DN15	0.4 m³/h	G1/2"	350 kPa	SEZ4
VFTR315-0.6	DN15	0.6 m³/h	G1/2"	350 kPa	SEZ4
VFTR315-1.0	DN15	1.0 m³/h	G1/2"	350 kPa	SEZ4
VFTR315-1.6	DN15	1.6 m³/h	G1/2"	350 kPa	SEZ4
VFTR320-2.0	DN20	2.0 m³/h	G3/4"	250 kPa	SEZ4
VFTR320-2.5	DN20	2.5 m³/h	G3/4"	250 kPa	SEZ4
VFTR320-4.0	DN20	4.0 m³/h	G3/4"	100 kPa	SEZ4
VFTR320-6.0	DN20	6.0 m³/h	G3/4"	100 kPa	SEZ4
VFTR325-7.0	DN25	7.0 m³/h	G1"	70 kPa	SEZ4

VALVE ACTUATOR FOR 0...10 V OR 3-POSITION CONTROL

The SEZ4 series of valve actuators are easy to mount and have a clear position indication which shows the position of the actuator. The actuator has manual manoeuvring.



SEZ4

Technical data

Force	400 N
Stroke	5.5 mm
Ambient temperature	0...50 °C
Storage temperature	-10...+80 °C
Media temperature	1...110 °C
Ambient humidity	Max. 95 % RH
Protection class	IP44
Connection	M30 x 1.5

ACTUATORS FOR INDUSTRIETECHNIK'S VALVE RANGES VFTR AND VFMD

Article	Supply voltage	Power consumption	Control signal	Stroke time
SEZ4F24	24 V AC ±15 %	0.6 W / 0.6 VA	3-point	150 s
SEZ4M24	24 V AC ±15 %, 24 V DC ±15 %	6 W / 6 VA	0...10 V DC	30 s
SEZ4F230	230 V AC ±15 %, 50/60 Hz	6 W / 6 VA	3-point	150 s

2- AND 3-WAY BALL VALVES, DN15-50, KVS 0.6-63

Ball valves designed for control of hot, cold or glycol-mixed water in heating and ventilation systems. These ball valves can be used as either characterized control ball valves when a flow plate is installed in port A (default mode), or as on/off ball valves when the flow plate is removed. When the flow plate is removed the Kvs between port A and AB is increased. To be coupled to SEB4 / SEB5 actuators.

News!

0%



Technical data

Application	Heating systems, cooling systems, ventilation systems
Pressure rating	PN40
Connection	BSP internally threaded according to ISO 228/1
Flow characteristics	A - AB = equal percentage (Flow plate installed), B - AB = linear, On/Off (No flow plate)
Max. leakage	0 % of the kvs value
Media	Hot water, cold water, glycol-mixed water (max. 50 % glycol)
Media temperature	-5...+140 °C
Rangeability	100:1

Material

Body	Brass CW617N
Ball	Chromed brass CW614N
Seat	PTFE
Stem	Stainless steel 1.4305
Flow plate	POM
Circlips	Stainless steel 1.4310
O-rings	EPDM



VFBV2



VFBV3

2-WAY VALVES

Article	Nominal diameter	Kvs with flow plate installed in port A	Kvs (On/off, A-AB)	Actuator
VFBV215	DN15	0.6/1.0/1.6/2.5/4.0 m³/h	6.3 m³/h	SEB4
VFBV220	DN20	6.3 m³/h	10 m³/h	SEB4
VFBV225	DN25	10 m³/h	16 m³/h	SEB4
VFBV232	DN32	16 m³/h	25 m³/h	SEB5
VFBV240	DN40	25 m³/h	40 m³/h	SEB5
VFBV250	DN50	40 m³/h	63 m³/h	SEB5

3-WAY VALVES

Article	Nominal diameter	Kvs with flow plate installed in port A	Kvs (On/off, A-AB)	Kvs (On/off, B-AB)	Actuator
VFBV315	DN15	0.6/1.0/1.6/2.5/4.0 m³/h	6.3 m³/h	4 m³/h	SEB4
VFBV320	DN20	6.3 m³/h	10 m³/h	6.3 m³/h	SEB4
VFBV325	DN25	10 m³/h	16 m³/h	10 m³/h	SEB4
VFBV332	DN32	16 m³/h	25 m³/h	16 m³/h	SEB5
VFBV340	DN40	25 m³/h	40 m³/h	25 m³/h	SEB5
VFBV350	DN50	40 m³/h	63 m³/h	40 m³/h	SEB5

ACCESSORIES

Article	Description
VF-HL1	Hand lever for manual operation of ball valves



VF-HL1

BALL VALVE ACTUATOR FOR VFBV2 AND VFBV3 VALVES

Ball valve actuator with bi-directional motor mainly used in central air-conditioning systems, heating systems, water treatment, and production industry to control the flow of cold/hot media.

Technical data	
Ambient temperature	-5...+50 °C
Storage temperature	-30...+70 °C
Ambient humidity	Max. 90 % RH (non-condensing)
Protection class	IP54
Working angle	90°
Connection, actuator	Square 9 mm hole with M5 screw



SEB

MODELS

Article	Supply voltage	Power consumption	Control signal	Torque	Running time, actuator
SEB4F24	24 V AC	3 VA	Floating or On/off (3-wire)	≥ 4 Nm	45 s / 90°
SEB4M24	24 V AC	4 VA	0(2)...10 V DC or 0(4)...20 mA	≥ 4 Nm	45 s / 90°
SEB4F230	230 V ~	5 VA	Floating or On/off (3-wire)	≥ 4 Nm	45 s / 90°
SEB5F24	24 V AC	3 VA	Floating or On/off (3-wire)	≥ 5 Nm	50 s / 90°
SEB5M24	24 V AC	4 VA	0(2)...10 V DC or 0(4)...20 mA	≥ 5 Nm	50 s / 90°
SEB5F230	230 V ~	5 VA	Floating or On/off (3-wire)	≥ 5 Nm	50 s / 90°

BUTTERFLY VALVES

The VF series of butterfly valves are designed for use in LPW (low pressure water) heating and air conditioning systems.

Technical data

Pressure rating	PN16
Media temperature	-15...+90 °C

Article	Nominal diameter	Kvs	Max. diff. pressure	Actuator
VF32	DN32	40 m³/h	1000 kPa / 10 bar	DAL... / DML24
VF40	DN40	50 m³/h	1000 kPa / 10 bar	DAL... / DML24
VF50	DN50	99 m³/h	800 kPa / 8 bar	DAL... / DML24
VF65	DN65	170 m³/h	600 kPa / 6 bar	DAL... / DML24
VF80	DN80	261 m³/h	600 kPa / 6 bar	DAG... / DMG24



VF65



KIT-VF32/80

ACCESSORY

Article	Description
KIT-VF32/80	Assembly kit for butterfly valves VF with electric actuator



The valves are supplied with the assembly kit model KIT-VF32/80.

ELECTRIC ACTUATORS FOR VF VALVES SERIES

Bi-directional actuators with manual override, 2 SPDT auxiliary switches, selectable rotation direction, IP44 or IP54 with cable glands.

Article	Torque	Running time, actuator	Supply voltage	Control signal	Auxiliary switch
DAL24S	24	125 s	24 V AC / DC	on/off or 3 point	2 x 3 (1.5) A / AC 230 V
DAL230S	24	125 s	230 V AC	on/off or 3 point	2 x 3 (1.5) A / AC 230 V
DML24S	24	125 s	24 V AC / DC	Y1: 0(2)...10 V DC Y2: 0(4)...20 mA U: 0(2)...10 V DC (feedback signal)	2 x 3 (1.5) A / AC 230 V
DAG24S	32	160 s	24 V AC / DC	on/off or 3 point	2 x 3 (1.5) A / AC 230 V
DAG230S	32	160 s	230 V AC	on/off or 3 point	2 x 3 (1.5) A / AC 230 V
DMG24S	32	240 s	24 V AC / DC	Y1: 0(2)...10 V DC Y2: 0(4)...20 mA U: 0(2)...10 V DC (feedback signal)	2 x 3 (1.5) A / AC 230 V



DAL-DML



DAG-DMG

ADAPTER KIT FOR ADAPTING INDUSTRIE-TECHNIK'S ACTUATORS TO VALVES OF OTHER BRANDS

BELIMO

Valve	DN min.-max.	Stroke	Actuator	Adapter type
H4	15 - 50 mm	15 mm	SE5.../SE10...	OVA-015
H5	15 - 50 mm	15 mm	SE5.../SE10...	OVA-015
H6	15 - 50 mm	15 mm	SE5.../SE10...	OVA-015
H6	65 mm (kvs 58)	18 mm	SE10...	OVA-015
H7	15 - 50 mm	15 mm	SE5.../SE10...	OVA-015
H7	65 mm (kvs 58)	18 mm	SE10...	OVA-015
H7	80 mm (kvs 90)	18 mm	SE10...	OVA-015



OVA-015

CONTROLLI

Valve	DN min.-max.	Stroke	Actuator	Adapter type
VSB	15 - 50 mm	16.5 mm	SE5.../SE10...	OVA-141
VMB	15 - 50 mm	16.5 mm	SE5.../SE10...	OVA-141



OVA-141

DANFOSS

Valve	DN min.-max.	Stroke	Actuator	Adapter type
(H)VF2/(H)VF3	15 - 50 mm	15 mm	SE5.../SE10...	OVA-020
(H)VL2/(H)VL3	15 - 50 mm	15 mm	SE5.../SE10...	OVA-020
(H)VRB2/(H)VRB3	15 mm	10 mm	SE5...	OVA-020
(H)VRB2/(H)VRB3	20 - 50 mm	15 mm	SE5.../SE10...	OVA-020
(H)VRG2/(H)VRG3	15 mm	10 mm	SE5...	OVA-020
(H)VRG2/(H)VRG3	20 - 50 mm	15 mm	SE5.../SE10...	OVA-020
(H)VFS2	15 - 25 mm	15 mm	SE5.../SE10...	OVA-020
VR2/VR3	15 - 25 mm	15 mm	SE5.../SE10...	OVA-020
AB-QM	10 - 20 mm	2,3 mm	SE1.2...	N/A
AB-QM	25 - 32 mm	4.5 mm	SE1.2...	N/A



OVA-020

ESBE

Valve	DN min.-max.	Stroke	Actuator	Adapter type
VL125	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL135	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL335	65 - 80 mm	20 mm	SE5.../SE10...	OVA-F4
VLA121	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VLA221	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VLA131	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VLA325	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VLA325	65 mm	25 mm	SE5.../SE10...	OVA-031
VLB225	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VLB225	65 - 150 mm	40 mm	SE5.../SE10...	OVA-F4
VLA335	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VLA335	65 - 150 mm	40 mm	SE18.../SE25...	OVA-F4
VLB235	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VLB235	65 - 150 mm	40 mm	SE18.../SE25...	OVA-F4
VLA425	25 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VLE122	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VLE132	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VLE222	25 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VLE325	20 - 40 mm	20 mm	SE5.../SE10...	OVA-131
VLC125	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VLC225	25 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VLC325	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VLC425	25 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL2FC	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL3FC	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL2TA	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL2TAA	25 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL3TA	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL2FA	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL2FAA	25 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL3FA	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL2TB	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL2TBA	25 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL3TB	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL2FD	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
VL2FDA	25 - 50 mm	20 mm	SE5.../SE10...	OVA-131



OVA-131



OVA-F4

HONEYWELL

Valve	DN min.-max.	Stroke	Actuator	Adapter type
V5011R	15 - 50 mm	20 mm	SE5.../SE10...	OVA-011
V5013A	15 - 50 mm	20 mm	SE5.../SE10...	OVA-011
V5013F	15 - 50 mm	20 mm	SE5.../SE10...	OVA-011
V5013R	15 - 50 mm	20 mm	SE5.../SE10...	OVA-011
V5015A	100 - 150 mm	38 mm	SE18.../SE25...	OVA-013
V5329C	15 - 80 mm	20 mm	SE5.../SE10...	OVA-011
V5329A	15 - 80 mm	20 mm	SE5.../SE10...	OVA-011
V5016A	15 - 80 mm	20 mm	SE5.../SE10...	OVA-011
V5016A	100 - 150 mm	38 mm	SE18.../SE25...	OVA-013
V5025A	15 - 80 mm	20 mm	SE5.../SE10...	OVA-011
V5025A	100 - 150 mm	38 mm	SE18.../SE25...	OVA-013
V5049A	15 - 80 mm	20 mm	SE5.../SE10...	OVA-011
V5049A	100 - 150 mm	38 mm	SE18.../SE25...	OVA-013
V5050A	15 - 80 mm	20 mm	SE5.../SE10...	OVA-011
V5050A	100 - 150 mm	38 mm	SE18.../SE25...	OVA-013
V5328A	15 - 80 mm	20 mm	SE5.../SE10...	OVA-011
V176A	15 mm	20 mm	SE5.../SE10...	OVA-011
V176B	20 - 80 mm	20 mm	SE5.../SE10...	OVA-011
V176B	100 mm	38 mm	SE18.../SE25...	OVA-013
V538C6xxx	50 - 150 mm	27 - 40 mm	SE18.../SE25...	OVA-013
V538C3xxx	15 - 50 mm	20 mm	SE5.../SE10...	OVA-011
V186	15 mm	20 mm	SE5.../SE10...	OVA-011
V186	20 - 80 mm	20 mm	SE5.../SE10...	OVA-011
V186	100 mm	38 mm	SE18.../SE25...	OVA-013



OVA-011



OVA-013



OVA-J1



OVA-A1



OVA-A2

JOHNSON

Valve	DN min.-max.	Stroke	Actuator	Adapter type
VG7201/VG7203	25 - 32 mm	13 mm	SE5.../SE10...	OVA-J1
VG7201/VG7203	40 - 50 mm	19 mm	SE5.../SE10...	OVA-J1
VG7401/VG7403	25 - 32 mm	13 mm	SE5.../SE10...	OVA-J1
VG7401/VG7403	40 - 50 mm	19 mm	SE5.../SE10...	OVA-J1
VG7802/VG7804	25 - 32 mm	13 mm	SE5.../SE10...	OVA-J1
VG7802/VG7804	40 - 50 mm	19 mm	SE5.../SE10...	OVA-J1
BM-2xx2	15 - 50 mm	19 mm	SE5.../SE10...	OVA-J1
BM-2xx8	15 - 50 mm	19 mm	SE5.../SE10...	OVA-J1
VG6210	15 - 25 mm	2,5 mm	SE1.2.....	N/A
VG6510	15 - 25 mm	2,5 mm	SE1.2.....	N/A
VG6810	15 - 25 mm	2,5 mm	SE1.2.....	N/A
V5210	10 - 20 mm	4 mm	SE1.2.....	N/A
V5510	10 - 20 mm	3,7 mm	SE1.2.....	N/A
V5810	10 - 20 mm	3,7 mm	SE1.2.....	N/A



The OVA-J1 adapter applies to valves with a M28x1,5 neck and a 1/4" UNF-28 threaded stem.

KIEBACK UND PETER

Valve	DN min.-max.	Stroke	Actuator	Adapter type
RF	15 - 50 mm	14 mm	SE5.../SE10...	OVA-A1
RF	65 - 100 mm	20 - 30 mm	SE18.../SE25...	OVA-A2
RK	15 - 50 mm	14 mm	SE5.../SE10...	OVA-A1
RK	65 - 100 mm	20 - 30 mm	SE18.../SE25...	OVA-A2

L&G, L&S, SIEMENS VALVES

Valve	DN min.-max.	Stroke	Actuator	Adapter type
VFF31 (VARISHUNT)	65 mm	40 mm	SE18.../SE25...	OVA-031
VFF32 (VARISHUNT)	65 mm	40 mm	SE18.../SE25...	OVA-031
VFF33 (VARISHUNT)	65 mm	40 mm	SE18.../SE25...	OVA-031
VFF34 (VARISHUNT)	65 mm	40 mm	SE18.../SE25...	OVA-031
VFF35 (VARISHUNT)	65 mm	40 mm	SE18.../SE25...	OVA-031
VFF36 (VARISHUNT)	65 mm	40 mm	SE18.../SE25...	OVA-031
VFG31 (VARISHUNT)	25 - 40 mm	20 mm	SE5.../SE10...	OVA-134
VFG32 (VARISHUNT)	25 - 40 mm	20 mm	SE5.../SE10...	OVA-134
VFG33 (VARISHUNT)	25 - 40 mm	20 mm	SE5.../SE10...	OVA-134
VFG34 (VARISHUNT)	25 - 40 mm	20 mm	SE5.../SE10...	OVA-134
VFG35 (VARISHUNT)	25 - 40 mm	20 mm	SE5.../SE10...	OVA-134
VFG36 (VARISHUNT)	25 - 40 mm	20 mm	SE5.../SE10...	OVA-134
VPF52E	15 - 40 mm	20 mm	SE5.../SE10...	OVA-081
VPF52F	15 - 40 mm	20 mm	SE5.../SE10...	OVA-081
VVF21	15 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VVF21	100 mm	40 mm	SE18.../SE25...	OVA-082
VVF22	25 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VVF22	25 - 80 mm	20 mm	SE18.../SE25...	OVA-081 + 02133011
VVF22 (until 2015-10)	100 mm	40 mm	SE18.../SE25...	OVA-081 + 02133011
VVF22 (from 2015-10)	100 mm	40 mm	SE18.../SE25...	OVA-082
VVF31	25 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VVF31	100 - 150 mm	40 mm	SE18.../SE25...	OVA-082
VVF32	15 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VVF32	15 - 80 mm	20 mm	SE18.../SE25...	OVA-081 + 02133011
VVF32 (until 2015-10)	100 - 150 mm	40 mm	SE18.../SE25...	OVA-081 + 02133011
VVF32 (from 2015-10)	100 - 150 mm	40 mm	SE18.../SE25...	OVA-082
VVF40	15 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VVF40	100 - 150 mm	40 mm	SE18.../SE25...	OVA-082
VVF41	50 - 150 mm	20/40 mm	SE18.../SE25...	OVA-082
VVF42	15 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VVF42	15 - 80 mm	20 mm	SE18.../SE25...	OVA-081 + 02133011
VVF42 (until 2015-10)	100 - 150 mm	40 mm	SE18.../SE25...	OVA-081 + 02133011
VVF42 (from 2015-10)	100 - 150 mm	40 mm	SE18.../SE25...	OVA-082
VVF42...K	50 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VVF42...K	50 - 80 mm	20 mm	SE18.../SE25...	OVA-081 + 02133011
VVF42...K	100 - 150 mm	40 mm	SE18.../SE25...	OVA-081 + 02133011
VVF43	65 - 250 mm	40 mm	SE18.../SE25...	OVA-081 + 02133011
VVF45	50 - 150 mm	20/40 mm	SE18.../SE25...	OVA-082
VVF51	15 - 40 mm	20 mm	SE5.../SE10...	OVA-081
VVF52	15 - 40 mm	20 mm	SE5.../SE10...	OVA-081
VVF53	15 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VVF53	15 - 80 mm	20 mm	SE18.../SE25...	OVA-081 + 02133011
VVF53	100 - 150 mm	40 mm	SE18.../SE25...	OVA-081 + 02133011
VVF53...K	50 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VVF53...K	50 - 80 mm	20 mm	SE18.../SE25...	OVA-081 + 02133011
VVF53...K	100 - 150 mm	40 mm	SE18.../SE25...	OVA-081 + 02133011
VVF53...K	200 - 250 mm	40 mm	SE18.../SE25...	OVA-082
VVF61	15 - 25 mm	20 mm	SE5.../SE10...	OVA-081
VVF61	40 - 150 mm	20/40 mm	SE18.../SE25...	OVA-082
VVG11 (VARIVALVE)	15 mm	5,5 mm	RV4Z4L1...	OVA-L1
VVG11	20 - 40 mm	20 mm	SE5.../SE10...	OVA-134
VVG12 (VARIVALVE)	25 - 40 mm	20 mm	SE5.../SE10...	OVA-134
VXF21	25 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VXF21	100 mm	40 mm	SE18.../SE25...	OVA-082
VXF22	25 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VXF22	25 - 80 mm	20 mm	SE18.../SE25...	OVA-081 + 02133011
VXF22 (until 2015-10)	100 mm	40 mm	SE18.../SE25...	OVA-081 + 02133011
VXF22 (from 2015-10)	100 mm	40 mm	SE18.../SE25...	OVA-082
VXF31	25 - 80 mm	20 mm	SE5.../SE10...	OVA-081



OVA-031



OVA-134



OVA-081



OVA-082

Valve	DN min.-max.	Stroke	Actuator	Adapter type
VXF31	100 - 150 mm	40 mm	SE18.../SE25...	OVA-082
VXF32	15 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VXF32	15 - 80 mm	20 mm	SE18.../SE25...	OVA-081 + 02133011
VXF32 (until 2015-10)	100 - 150 mm	40 mm	SE18.../SE25...	OVA-081 + 02133011
VXF32 (from 2015-10)	100 - 150 mm	40 mm	SE18.../SE25...	OVA-082
VXF40	15 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VXF40	100 - 150 mm	10 mm	SE18.../SE25...	OVA-082
VXF41	15 - 40 mm	20 mm	SE5.../SE10...	OVA-081
VXF41	50 - 150 mm	40 mm	SE18.../SE25...	OVA-082
VXF42	15 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VXF42	15 - 80 mm	20 mm	SE18.../SE25...	OVA-081 + 02133011
VXF42 (until 2015-10)	100 - 150 mm	40 mm	SE18.../SE25...	OVA-081 + 02133011
VXF42 (from 2015-10)	100 - 150 mm	40 mm	SE18.../SE25...	OVA-082
VXF43	65 - 250 mm	40 mm	SE18.../SE25...	OVA-081 + 02133011
VXF53	15 - 80 mm	20 mm	SE5.../SE10...	OVA-081
VXF61	15 - 25 mm	20 mm	SE5.../SE10...	OVA-081
VXF61	40 - 150 mm	20/40 mm	SE18.../SE25...	OVA-082
VVG41	15 - 50 mm	20 mm	SE5.../SE10...	OVA-081
VXG11 (VARIVALVE)	15 mm	5,5 mm	RVAZ4L1...	OVA-L1
VXG11	20 - 40 mm	20 mm	SE5.../SE10...	OVA-134
VXG12 (VARIVALVE)	25 - 40 mm	20 mm	SE5.../SE10...	OVA-134
VXG41	15 - 50 mm	20 mm	SE5.../SE10...	OVA-081
VXG44	15 - 50 mm	5,5 mm	RVAZ4L1	OVA-L1
VVG44	15 - 40 mm	5,5 mm	RVAZ4L1...	OVA-L1
VVG549	15 - 25 mm	5,5 mm	RVAZ4L1...	OVA-L1
VVI52	15 mm	5,5 mm	RVAZ4L1...	OVA-L1
VVG55	15 - 25 mm	5,5 mm	RVAZ4L1...	OVA-L1
VVP45	10 - 40 mm	5,5 mm	RVAZ4L1...	OVA-L1
VXP45	10 - 40 mm	5,5 mm	RVAZ4L1...	OVA-L1
VMP43	15 - 20 mm	5,5 mm	RVAZ4L1...	OVA-L1
VMP45	10 - 40 mm	5,5 mm	RVAZ4L1...	OVA-L1
VVI46	15 - 25 mm	2,5 mm	SE1.2.....	N/A
VXI46	15 - 25 mm	2,5 mm	SE1.2.....	N/A
VVS46	15 - 25 mm	2,5 mm	SE1.2.....	N/A
VXS46	15 - 25 mm	2,5 mm	SE1.2.....	N/A
VVP47	10 - 20 mm	2,5 mm	SE1.2.....	N/A
VXP47	10 - 20 mm	2,5 mm	SE1.2.....	N/A
VMP47	10 - 20 mm	2,5 mm	SE1.2.....	N/A



OVA-082



OVA-081



OVA-L1



OVA-134



VA7010



VA748X

OVENTROP

Valve	DN min.-max.	Stroke	Actuator	Adapter type
Cocon 2TZ	15 - 20 mm	2,5 mm	SE1.2.....	N/A
Cocon QTZ	10 - 32 mm	2,8 / 3,5 / 4 mm	SE1.2.....	N/A
Tri-M Plus	15 mm	2,5 mm	SE1.2.....	N/A

PETTINAROLI

Valve	DN min.-max.	Stroke	Actuator	Adapter type
91-series	15 - 25 mm	3 mm	SE1.2.....	VA7010
93-series	20 - 32 mm	6 mm	SE1.2.....	VA748X

REGIN

Valve	DN min.-max.	Stroke	Actuator	Adapter type
VTTV/VTTR/VTTB	15 - 20 mm (up to kvs 2.5)	2,5 mm	SE1.2.....	N/A

SATCHWELL

Valve	DN min.-max.	Stroke	Actuator	Adapter type
SVB-XXX-F3	50 - 150 mm	23 - 40 mm	SE18.../SE25...	OVA-133
SVG-XXX-F3	50 - 150 mm	23 - 40 mm	SE18.../SE25...	OVA-133
SVR-XXX-F3	50 - 150 mm	23 - 40 mm	SE18.../SE25...	OVA-133
SVR-G2	15 - 50 mm	20 mm	SE5.../SE10...	OVA-132
SVR-G3	15 - 50 mm	20 mm	SE5.../SE10...	OVA-132
VZ, MVZ	15 - 50 mm	20 mm	SE5.../SE10...	OVA-132
VZF, MVZF	65 - 150 mm	27 - 40 mm	SE18.../SE25...	OVA-133



OVA-133

SAUTER

Valve	DN min.-max.	Stroke	Actuator	Adapter type
V6R	15 - 50 mm	14 mm	SE5.../SE10...	OVA-151
B6R	15 - 50 mm	14 mm	SE5.../SE10...	OVA-151
VXD	15 - 50 mm	14 mm	SE5.../SE10...	OVA-151
VXE	15 - 50 mm	14 mm	SE5.../SE10...	OVA-151
BXD	15 - 50 mm	14 mm	SE5.../SE10...	OVA-151
BXE	15 - 50 mm	14 mm	SE5.../SE10...	OVA-151
V6F	15 - 50 mm	14 mm	SE5.../SE10...	OVA-151
V6G	15 - 50 mm	14 mm	SE5.../SE10...	OVA-151
V6S	15 - 50 mm	14 mm	SE5.../SE10...	OVA-151
B6F	15 - 50 mm	14 mm	SE5.../SE10...	OVA-151
B6G	15 - 50 mm	14 mm	SE5.../SE10...	OVA-151
B6S	15 - 50 mm	14 mm	SE5.../SE10...	OVA-151
VUL	10 - 20 mm	4 mm	SE1.2.....	N/A
BUL	10 - 20 mm	3,7 mm	SE1.2.....	N/A
VUT	10 - 20 mm	3/4 mm	SE1.2.....	N/A
BUT	10 - 20 mm	3 mm	SE1.2.....	N/A
VXL	10 - 20 mm	2,5 mm	SE1.2.....	N/A
BXL	25 - 40 mm	2,9 mm	SE1.2.....	N/A
VCL	10 - 32 mm	2,8 / 3,5 / 4 mm	SE1.2.....	N/A



OVA-132



OVA-151

TAC + SCHNEIDER

Valve	DN min.-max.	Stroke	Actuator	Adapter type
STL	20 - 65 mm	31.5 mm	SE18...	OVA-031
STL-SR	20 - 65 mm	22 mm	SE5.../SE10...	OVA-131
V241	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
V341	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
V353	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
V231	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
V232	25 - 50 mm	20 mm	SE5.../SE10...	OVA-131
V298	20 - 40 mm	22 mm	SE5.../SE10...	OVA-131
V211	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
V211T	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
V282	20 - 32 mm	22 mm	SE5.../SE10...	OVA-131
V282	40 - 50 mm	31.5 mm	SE18...	OVA-031
V282	15 mm	15 mm	SE18...	OVA-031
VG211	15 - 50 mm	16.5/25 mm	SE5.../SE10...	OVA-131
VG221F	65 mm	25 mm	SE10...	OVA-131
VG221F	80 - 150 mm	45 mm	SE18.../SE25...	OVA-031
VG222	65 - 150 mm	25/45 mm	SE18.../SE25...	OVA-031
VG311F	65 mm	25 mm	SE10...	OVA-131
VG311F	65 - 150 mm	25/45 mm	SE18.../SE25...	OVA-031
VG321	65 - 150 mm	25 - 45 mm	SE18.../SE25...	OVA-031
V311	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
V311T	15 - 50 mm	20 mm	SE5.../SE10...	OVA-131
V212	25 - 50 mm	20 mm	SE5.../SE10...	OVA-131
V212T	25 - 50 mm	20 mm	SE5.../SE10...	OVA-131
V395	40 - 50 mm	20 mm	SE5.../SE10...	OVA-131
V395	65 - 100 mm	30/39.5 mm	SE18.../SE25...	OVA-031
V265	40 - 100 mm	31.5/40.9/50.3 mm	SE18.../SE25...	OVA-031
V221	65 - 100 mm	30/39.5 mm	SE18.../SE25...	OVA-031
V384	20 - 32 mm	22 mm	SE5.../SE10...	OVA-131
V384	40 - 50 mm	31.5 mm	SE18...	OVA-031
V384	15 mm	15 mm	SE5...	OVA-231
V386	20 - 32 mm	22 mm	SE5.../SE10...	OVA-131
V386	40 - 50 mm	31.5 mm	SE18...	OVA-031
V386	15 mm	15 mm	SE5...	OVA-231
V392	20 - 32 mm	22 mm	SE5.../SE10...	OVA-131
V392	40 - 50 mm	31.5 mm	SE18...	OVA-031
V392	15 mm	15 mm	SE5...	OVA-231
V394	20 - 50 mm	20 mm	SE5.../SE10...	OVA-131
V394	40 - 53 mm	31.5 mm	SE18...	OVA-031
V394	15 mm	15 mm	SE5...	OVA-231
V292	20 - 32 mm	22 mm	SE5.../SE10...	OVA-131
V292	40 - 100 mm	31.5/40.9/50.3 mm	SE18.../SE25...	OVA-031
V292	15 mm	15 mm	SE5...	OVA-231
V294	20 - 32 mm	22 mm	SE5.../SE10...	OVA-131
V294	15 mm	15 mm	SE5...	OVA-231
V295	20 - 32 mm	22 mm	SE5.../SE10...	OVA-131
V295	40 - 100 mm	31.5/40.9/50.3 mm	SE18.../SE25...	OVA-031
V222	65 - 100 mm	30 mm	SE18...	OVA-031
V321	65 - 100 mm	30 mm	SE18...	OVA-031
VZ28/VZ28C	15 - 20 mm	2,5 mm	SE1.2.....	N/A
VZ38/VZ38C	15 - 20 mm	2,5 mm	SE1.2.....	N/A
VZ48/VZ48C	15 - 20 mm	2,5 mm	SE1.2.....	N/A



OVA-031



OVA-131





OVA-231

WATTS INDUSTRIES

Valve	DN min.-max.	Stroke	Actuator	Adapter type
2131	15 - 25 mm	2,5 mm	SE1.2.....	N/A
3131	15 - 25 mm	2,5 mm	SE1.2.....	N/A
4131	15 - 25 mm	2,5 mm	SE1.2.....	N/A

9 Presence and smoke detectors

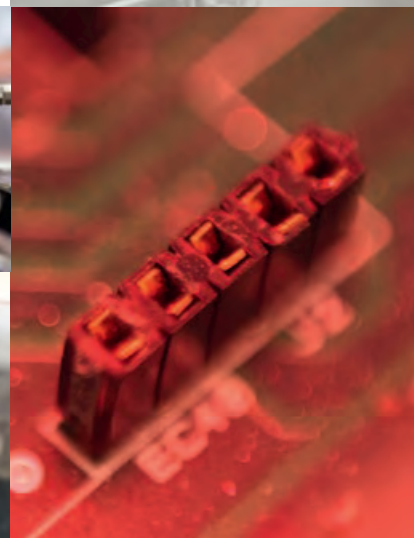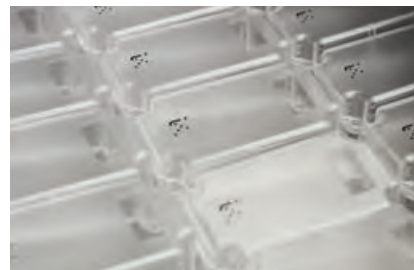

MOTION DETECTOR

Detector providing a signal when someone enters the room. The detector has a pulse-detecting function that minimizes the risk of false alarms. Settable on/off delays and change-over relay.

Technical data	
Supply voltage	24 AC/DC
Alarm relay	200 mA, 24 V AC/DC, potential-free, change-over relay
Current consumption	5 mA
Temperature range	-20...+50 °C
Ambient humidity	Max. 95 % RH
Dimensions	Wall model: 112 x 66 x 45 mm Ceiling model: Ø 110 x h 44 mm
Protection class	IP20



SIR24-PC

Article	Mounting	Detection area
SIR24-PC	Ceiling	Height x 2.5 = coverage diameter, 25° angle

SMOKE DETECTOR FOR DUCT MOUNTING, OPTICAL

Single-tube detector, including 600 mm Venturi tube.

Technical data	
Supply voltage	9...33 V DC (via CABV control unit). 24 V AC ±15 % for RAC models.
Power consumption, incl. end resistor (not RAC(M))	Normal operation: 10 mA at 24 V DC. Alarm condition: 50 mA at 24 V DC. Service alarm condition: 20 mA at 24 V DC.
Mounting	Duct
Tube length	540 mm Ø 30 mm
Dimensions	155 x 115 x 75 mm
Protection class	IP54



SSDD-OE65

Article	Description
SSDD-OE65	Optical detector with service alarm (max 20 sensors, to be connected to CABV control unit) including 600 mm Venturi tube.
SSDD-OE65-RAC	Optical detector with AC power supply and relay output only, with service alarm, including 600 mm Venturi tube.

ACCESSORIES

Article	Description
SSDD-TDS	Mounting spacer for insulated pipe ducts
SSDD-VR600	Venturi tube, 540 mm length (standard supply together with the detector)
SSDD-VR2000	Venturi tube, 1940 mm length



SSDD-TDS



SSDD-VR600/
VR2000

SMOKE DETECTOR FOR CEILING MOUNTING

Smoke detector for all kinds of areas. Constructed to meet the high demands of a modern fire installation. To be used with CABV control unit.

Technical data	
Supply voltage	9...33 V DC (via CABV control unit)
Current consumption	10 mA (50 mA if an alarm occurs)
Mounting	Ceiling
Dimensions	Ø 100 x h 50 mm
Protection class	IP43



SSDC65-OE

MODELS

Article	Description	Detection principle
SSDC65-OE	Optical detector with service alarm	Optical. Photoelectric, reflecting type



SSDC-BP

ACCESSORIES

Article	Description
SSDC-BP	Base for detectors
SSDC-BPR-S50	Base for SSDC50 detectors with built-in change-over relay (24 V AC)
SSDC-BPR-S65	Base for S65 detectors with built-in change-over relay (24 V AC)



SSDC-BPR-S50

CONTROL UNITS FOR SMOKE DETECTORS

Control unit for smoke detectors. Provides power supply and alarm handling for smoke detectors, with or without service alarm. Two relay contacts for alarm handling.

Technical data	
Current consumption	30 mA (70 mA if an alarm occurs)
Mounting	DIN-rail
Number of modules	3
Dimensions	52 x 85 x 74 mm
Protection class	IP20

Article	Supply voltage	Alarm outputs
CABV24-S-300/D	24 V AC/DC	One change-over contact (smoke), one closing contact (smoke), one closing contact (service)
CABV-S-300/D	230 V AC	One change-over contact (smoke), one closing contact (smoke), one closing contact (service)



CABV24-S-300/D



CABV-S-300/D

SMOKE SPRAY


Spray for control of smoke detectors. Suitable for control of ionisation or optical smoke detectors.

Article	Description
SPRAY-260	Smoke spray, 260 ml



SPRAY-260

10 Miscellaneous products

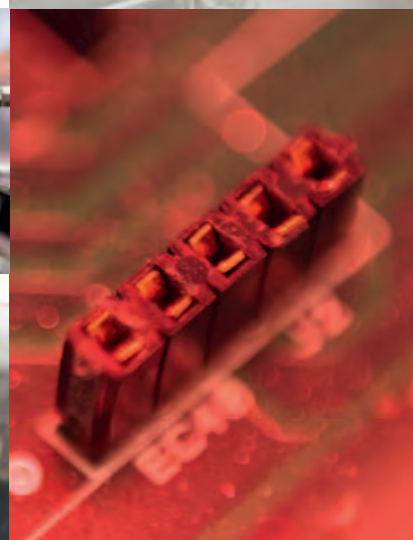

TRANSFORMER, 15 VA, DIN-RAIL MOUNTING

Transformer with built-in PTC fuse. Overload and short-circuit proof.

Technical data	
Supply voltage	230 V ~ (230 V ~ 50/60 Hz 15 VA)
Output voltage	12 / 24 V AC
Max. load	15 VA
Mounting	DIN-rail
Number of modules	2
Dimensions, external (WxHxD)	35 x 90 x 60 mm
Protection class	IP20



TR15-2D

Article	Description
TR15-2D	Transformer

TRANSFORMER, 40 VA, DIN-RAIL MOUNTING

Transformer with built-in PTC fuse. Overload and short-circuit proof.

Technical data	
Supply voltage	230 V ~ (230 V ~ 50/60 Hz 40 VA)
Output voltage	12 V AC and 24 V AC
Max. load	40 VA
Ambient temperature	Max. 40 °C °C
Mounting	DIN-rail
Number of modules	3
Dimensions, external (WxHxD)	53 x 90 x 60 mm
Temperature class	B
Protection class	IP20



TR40

Article	Description
TR40	Transformer

STEP CONTROLLER, 1- AND 2-STAGE

Step controller suitable for heating/cooling or alarm applications. It converts a 0...10 V DC input signal to a relay output. The controller is suitable for DIN-rail or cabinet mounting and have adjustable switching points. The step controller with 2 relays can be set to either binary or sequential control. Individually settable on/off levels

Technical data	
Supply voltage	24 V AC +/- 15 % 50-60 Hz, 24 V DC (18...35 V DC)
Input signal	0...10 V DC
Output signal	0...10 V DC
Mounting	DIN-rail
Number of modules	3
Dimensions	52 x 85 x 74 mm
Protection class	IP20

Article	Description	Output	Step differential
SC1	Step controller with 1 relay (change-over)	One relay, change-over, 10 A, 250 V AC	-
SC2	Step controller with 2 relays (closing)	Two relays, in closing, 10 A, 250 V AC	0...2 V DC



SC1



SC2

STEP CONTROLLER, 4- OR 6-STAGE

Controller intended for control of electric heating coils, four or six relays. It can be used with any controller with a 0...10 V DC or 10...2 V DC output signal. The step controller also have an analogue output (0...10 V) for control of an electric heating controller to give proportional heating between steps.

Technical data	
Supply voltage	24 V AC, 6 VA
Output	4 alt. 6 relays (closing), binary or sequential control
Input signal	0...10 V DC
Output signal	0...10 V DC
Mounting	DIN-rail
Number of modules	6
Dimensions	100 x 85 x 74 mm
Protection class	IP20

Article	Description	
SC4	Step controller with 4 relays	-
SC6	Step controller with 6 relays	Switch off relay 6 after 3 minutes



SC4



SC6

FROST PROTECTION UNIT

The electronic frost protection unit is mainly intended for use in air handling systems. If the temperature falls below the setpoint, the relays will fall and an alarm LED lights up. The unit should be connected to an NTC sensor placed on the heating coil or return water pipe. The frost protection unit has two alarm relays and manual or automatic reset. The sensor must have 0...30°C temperature range.

When there is frost risk, the device has a 0...10 V DC control output that can be used to override the valve.



FV

Technical data	
Supply voltage	24 V AC
Power consumption	2 VA
Setpoint	0...15 °C
P-band, control signal override	5 K (fixed)
Mounting	DIN-rail
Number of modules	3
Dimensions	52 x 85 x 74 mm
Protection class	IP20
Inputs	
Sensor inputs	1, 0...30°C (NTC sensor)
Control signal	0...10 V DC (from the controller)
Outputs	
Relays	24 V AC, 1 A, change-over and 230 V AC, 1 A, single contact
Output signal	0...10 V DC

Article	Description
FV	Frost protection unit (delivered without a sensor)

INDEX

000071	48
104552	100
2133005	139
2951352501	145, 146
984.M	100

A

ADV11	125
ADV12	129
ADVFX	125, 133
AF24SE	118
AF230SE	118
AHUxxx	25
AT2090	53
AT2090U	53

C

CA1	27
CABV24-S-300/D	161
CABV-S-300/D	161
CFW	109
CTR25	62
CTR40	62
CTR80	63
CTR230X010	60
CTR400X010	60
CTR2000	61
CTR-ADD	60
CTR/D	60
CTR-M	60
CTR-S1	61
CTR-X/D	60

D

DA24	114
DA24S	114
DA230	114
DA230S	114
DAG24	116
DAG24S	116, 150
DAG230	116
DAG230S	116, 150

DAK24	112
DAK24S	112
DAK230	112
DAK230S	112
DAL24	115
DAL24S	115, 150
DAL230	115
DAL230S	115, 150
DAN24	112
DAN24F	117
DAN24FS	117
DAN24S	112
DAN230	112
DAN230F	117
DAN230FS	117
DAN230S	112
DAS24	113
DAS24S	113
DAS230	113
DAS230S	113
DAT24F	118
DAT24FS	118
DAT230F	118
DAT230FS	118
DB10MI	94
DB15MI	94
DB20MI	94
DB20MI/1	94
DB25MI	94
DB32MI	94
DB40MI	94
DB50MI	94
DBAT-3	53
DBAT-3U	53
DBAT-5	53
DBAT-5U	53
DBET-4	50
DBET-4/2	50
DBET-4U	50
DBET-5	50
DBET-5U	50
DBET-6	50

DBET-7	50
DBET-7/2	50
DBET-8	50
DBET-10	50
DBET-11	50
DBET-16	50
DBET-16U	50
DBET-17	50
DBET-18	50
DBET-22	49
DBET-22/2	49
DBET-22/2U	49
DBET-22U	49
DBET-23	49
DBET-23U	49
DBET-26	49
DBET-26/2	49
DBET-26/2U	49
DBET-26U	49
DBET-27	49
DBET-27U	49
DB-I4D/02/001	38
DB-I4D/02/002	38
DB-I4D/02/003	38
DB-I4D/02/004	38
DBKH-10	86
DBKH-10H	87
DBKH-10U	86
DBKH-20H	87
DB-KLQ	85
DB-KLQ5	85
DBL-205A	98
DBL-205B	98
DBL-205C	98
DBL-205D	98
DBL-205E	98
DB-M6	99
DB-M6P6	99
DB-M10	99
DB-M10P13	99
DB-PA	119
DB-PF	119

DB-R/1	40
DB-R/2	42
DB-R/3	44
DB-RLQ	84
DB-RLQ5	84
DB-TA-3A5-000	34
DB-TA-3C3-13A	35
DB-TA-3C3-19A	35
DB-TA-3C3-99A	35
DB-TA-33A-10A	33
DB-TA-33A-13A	33
DB-TA-323-435	29
DB-TA-335-993	30
DB-TA-343-139	30
DB-TA-345-139	31
DB-TA-345-199	31
DB-TA-345-999	31
DB-TA-363-436	31
DB-TA-383-433	32
DB-TA-387-866	32
DB-TA-393-435	34
DBTV-1	56
DBTV-2U	56
DBTV-7	56
DBTV-7U	56
DBTV-8	56
DBTV-8U	56
DBTV-11	56
DBTV-16	56
DBTV-17	56
DBTV-17U	56
DBTV-18	56
DBTV-18U	56
DBTZ-2U	52
DBTZ-7	52
DBTZ-7/2	52
DBTZ-8	52
DBTZ-12U	52
DB-VZ2-15	126
DB-VZ2-20	126
DB-VZ2-25	126
DB-VZ3-15	126
DB-VZ3-20	126
DB-VZ3-25	126
DBZ-01	50, 54, 57
DBZ-02	50, 54, 57
DBZ-05	54
DBZ-06	98, 100

DBZ-08	97
DBZ-09	95
DBZ-14A	98, 100
DBZ-14B	98, 100
DBZ-16	50, 57
DBZ-16/14	56, 57
DBZ-17	50, 57
DBZ-17/14	56, 57
DBZ-17/14/200	57
DBZ-18	57
DBZ-19	57
DBZ-22	79, 83, 92, 93
DBZ-25	51, 52
DBZ-30/14	49, 55, 57
DBZ-31/14	49, 55, 57
DBZ-40/14	55, 57
DBZ-41/14	55, 57
DBZ-50WA	69, 72
DBZ-90R	72
DBZ-90WA	69, 72
DBZ-120WA	69, 72
DBZ-135R	72
DBZ-170WA	69, 72
DBZ-310WA	69, 72
DBZ-AD1	72, 103
DBZH-102	86
DF	71
DM24	114
DM24S	114
DM230	114
DM230S	114
DMG24	116
DMG24S	116, 150
DMK24	112
DML24	115
DML24S	115, 150
DML230	115
DML230S	115
DMN24	112
DMS24	113
DMS24S	113
DMS230	113
DMS230S	113
DPTD-PT100	70
DPTD-PT1000	70
DTR11N7	39

E

ET060	48
ET060U	48
ET06060	48
ET06060U	48
F	
FCA-2	131
FCA-3	131
FCV-215	130
FCV-220	130
FCV-225	130
FCV-232	130
FCV-315	130
FCV-320	130
FCV-325	130
FCV-332	130
FHxxx	26
FV	166

I

IS02420001	134
IS0603080300	135, 136, 137, 141
IS2921351201	139
IS2921354201	134, 139, 142
IS2921357901	135, 137
IS6321457301	134

K

KIT-VF32/80	150
-------------	-----

M

MR32W	108
-------	-----

N

NF24SE	119
NF230SE	119
NT0220-NI1000-01	74
NT0220-NI1000-02	74
NT0220-NTC1.8	74
NT0220-NTC2.2	74
NT0220-NTC10-01	74
NT0220-NTC10-02	74
NT0220-NTC10-03	74
NT0220-NTC20	74
NT0220-NTC100	74
NT0420-NI1000-01	74
NT0420-NI1000-02	74

NT0420-NTC1.8	74
NT0420-NTC2.2	74
NT0420-NTC10-01	74
NT0420-NTC10-02	74
NT0420-NTC10-03	74
NT0420-NTC20	74
NT0515-NTC15	75

O

OVA-011	
OVA-013	
OVA-015	
OVA-020	
OVA-031	
OVA-081	
OVA-082	153
OVA-131	153
OVA-132	151
OVA-133	151
OVA-134	154, 157
OVA-141	154, 155
OVA-151	154, 155
OVA-231	152, 157
OVA-A1	156
OVA-A2	156
OVA-F4	154, 155
OVA-J1	151
OVA-L1	156

P

PASTA-20	152
PC-H	153
PC-T	155
PC-TC	27
PC-U	27
PT0415-PT100	75
PT0415-PT1000	75
PT1020C-PT100	76
PT1020C-PT1000	76
PT1020-PT100	75
PT1020-PT1000	75

S

SA-NI1000-01	72
SA-NI1000-02	72
SA-NTC1.8	72
SA-NTC2.2	72
SA-NTC10-01	72

SA-NTC10-02	72
SA-NTC10-03	72
SA-NTC15-01	72
SA-NTC15-03	72
SA-NTC15-04	72
SA-NTC20	72
SAP-NI1000-01-2	73
SAP-NI1000-02-2	73
SAP-NTC1.8-2	73
SAP-NTC2.2-2	73
SAP-NTC10-01-2	73
SAP-NTC10-02-2	73
SAP-NTC10-03-2	73
SAP-NTC15-01-3	73
SAP-NTC20-2	73
SAP-PT100-2	73
SAP-PT1000-1	73
SAP-PT1000-2	73
SA-PT100	72
SA-PT1000	72
SAUW	108
SC1	165
SC2	165
SC4	165
SC6	165
SCC-NI1000-01	66
SCC-NI1000-02	66
SCC-NTC1.8	66
SCC-NTC2.2	66
SCC-NTC10-01	66
SCC-NTC10-02	66
SCC-NTC10-02-BR-J	66
SCC-NTC10-03	66
SCC-NTC15-01	66
SCC-NTC20	66
SCC-PT100	66
SCC-PT1000	66
SC-NI1000-01-Y	66
SC-NI1000-02-Y	66
SC-NTC1.8-Y	66
SC-NTC2.2-Y	66
SC-NTC10-01-Y	66
SC-NTC10-02-Y	66
SC-NTC10-03-Y	66
SC-NTC20-Y	66
SC-PT100-Y	66
SC-PT1000-Y	66
SE1.2F24/PT	129

SE1.2F230/PT	129
SE1.2M24-3.2/PT	129
SE1C24	125
SE1C24S	125
SE1C230	125
SE1C230S	125
SE1M24	133
SE1MP24	133
SE1T24	133
SE1T24S	133
SE1T230	133
SE1T230S	133
SE1TP24	133
SE1TP24S	133
SE1TP230	133
SE1TP230S	133
SE5F24	143
SE5F230	144
SE5M24	143
SE10F24	143
SE10F230	144
SE10M24	143
SE18F24	143
SE18F230	144
SE18M24	143
SE25F24	143
SE25F230	144
SE25M24	143
SEB4F24	149
SEB4F230	149
SEB4M24	149
SEB5F24	149
SEB5F230	149
SEB5M24	149
SE-NI1000-01-Y	73
SE-NI1000-02-Y	73
SE-NTC1.8-Y	73
SE-NTC2.2-Y	73
SE-NTC10-01-Y	73
SE-NTC10-02-Y	73
SE-NTC10-03-Y	73
SE-NTC20-Y	73
SE-PT100-Y	73
SE-PT1000-Y	73
SET-30	76
SET-PT1000	76
SEW	108
SEW-PT1000	108

SEZ4F24	148
SEZ4F230	148
SEZ4M24	148
SF1E	95
SF1K	95
SF1RE	95
SF2EI	95
SF2REI	95
SF3E	95
SF4E	95
SF6E	95
SI-NI1000-01-Y	68
SI-NI1000-02-Y	68
SI-NTC1.8-Y	68
SI-NTC2.2-Y	68
SI-NTC10-01-Y	68
SI-NTC10-02-Y	68
SI-NTC10-03-Y	68
SI-NTC20-Y	68
SI-PT100-Y	68
SI-PT1000-Y	68
SIR24-PC	160
SIR-PW	109
SIR-SW	109
SL1E	97
SM24/CA	127
SM230/CA	127
SPRAY-260	161
SQ01	105
SSDC65-OE	161
SSDC-BP	161
SSDC-BPR-S50	161
SSDC-BPR-S65	161
SSDD-OE65	160
SSDD-OE65-RAC	160
SSDD-TDS	160
SSDD-VR600	160
SSDD-VR2000	160
STCC-NI1000-01	67
STCC-NI1000-02	67
STCC-NTC1.8	67
STCC-NTC2.2	67
STCC-NTC10-01	67
STCC-NTC10-02	67
STCC-NTC10-03	67
STCC-NTC15-01	67
STCC-NTC15-02	67
STCC-NTC15-03	67

STCC-NTC15-04	67
STCC-NTC20	67
STCC-PT100	67
STCC-PT1000	67
STC-NI1000-01-Y	67
STC-NI1000-02-Y	67
STC-NTC1.8-Y	67
STC-NTC2.2-Y	67
STC-NTC10-01-Y	67
STC-NTC10-02-Y	67
STC-NTC10-03-Y	67
STC-NTC20-Y	67
STC-PT100-Y	67
STC-PT1000/430-Y	67
STC-PT1000-Y	67
STIC-NI1000-01/135	71
STIC-NI1000-01/220	71
STIC-NI1000-01/300	71
STIC-NI1000-02/135	71
STIC-NI1000-02/220	71
STIC-NI1000-02/300	71
STIC-NTC1.8/135	71
STIC-NTC1.8/220	71
STIC-NTC1.8/300	71
STIC-NTC2.2/135	71
STIC-NTC2.2/220	71
STIC-NTC2.2/300	71
STIC-NTC10-01/135	71
STIC-NTC10-01/220	71
STIC-NTC10-01/300	71
STIC-NTC10-02/135	71
STIC-NTC10-02/220	71
STIC-NTC10-02/300	71
STIC-NTC10-03/135	71
STIC-NTC10-03/220	71
STIC-NTC10-03/300	71
STIC-NTC20/135	71
STIC-NTC20/220	71
STIC-NTC20/300	71
STIC-PT100/135	71
STIC-PT100/220	71
STIC-PT100/300	71
STIC-PT1000/135	71
STIC-PT1000/220	71
STIC-PT1000/300	71
STI-NI1000-01-Y	69
STI-NI1000-02-Y	69
STI-NTC1.8-Y	69

STI-NTC2.2-Y	69
STI-NTC10-01-Y	69
STI-NTC10-02-Y	69
STI-NTC10-03-Y	69
STI-NTC20-Y	69
STI-PT100-Y	69
STI-PT1000-50-Y	69
STI-PT1000-120-Y	69
STI-PT1000-170-Y	69
STI-PT1000-310-Y	69
STI-PT1000-Y	69
STM-PT1000-Y	68

T

TA31/I	48
TA33/I	48
TA34/I	48
TAE1	28
TAE2	28
TC060	49
TC090	49
TCO1	84
TCO2A	82
TCO2A-D	82
TCO2A-D-M	82
TCO2A-D-NI1000-01	82
TCO2A-D-NI1000-02	82
TCO2A-D-NTC1.8	82
TCO2A-D-NTC2.2	82
TCO2A-D-NTC10-01	82
TCO2A-D-NTC10-02	82
TCO2A-D-NTC10-03	82
TCO2A-D-NTC20	82
TCO2A-D-PT100	82
TCO2A-D-PT1000	82
TCO2A-M	82
TCO2A-NI1000-01	82
TCO2A-NI1000-02	82
TCO2A-NTC1.8	82
TCO2A-NTC2.2	82
TCO2A-NTC10-01	82
TCO2A-NTC10-02	82
TCO2A-NTC10-03	82
TCO2A-NTC20	82
TCO2A-PT100	82
TCO2A-PT1000	82
TCO2AU	82
TCO2AU-D	82

TCO2AU-D-M	82	TPDA25A	102	TR40	164
TCO2AU-D-NI1000-01	82	TPDA25C	102	TTA	78
TCO2AU-D-NI1000-02	82	TPDA25C2	102	TTA-C	78
TCO2AU-D-NTC1.8	82	TPDA75A	102	TTA-CD	78
TCO2AU-D-NTC2.2	82	TPDA75C	102	TTA-D	78
TCO2AU-D-NTC10-01	82	TPDA1225A2	102	TTA-D-M	78
TCO2AU-D-NTC10-02	82	TPDA1225C2	102	TTA-M	78
TCO2AU-D-NTC10-03	82	TPDA1275A2	102	TTC011	79
TCO2AU-D-NTC20	82	TPDA1275C2	102	TTC012	79
TCO2AU-D-PT100	82	TPDA-C	101	TTC013	79
TCO2AU-D-PT1000	82	TPDL10	104	TTC021	79
TCO2AU-M	82	TPDL10-420	104	TTC022	79
TCO2AU-NI1000-01	82	TPDL20	104	TTC023	79
TCO2AU-NI1000-02	82	TPDL20-420	104	TTE011	79
TCO2AU-NTC1.8	82	TPDL40	104	TTE012	79
TCO2AU-NTC2.2	82	TPDL40-420	104	TTE013	79
TCO2AU-NTC10-01	82	TPDL100	104	TTE021	79
TCO2AU-NTC10-02	82	TPDL100-420	104	TTE022	79
TCO2AU-NTC10-03	82	TPDL250	104	TTE023	79
TCO2AU-NTC20	82	TPDL250-420	104	TTI011	80
TCO2AU-PT100	82	TPDL400	104	TTI012	80
TCO2AU-PT1000	82	TPDL400-420	104	TTI013	80
TCO2C	83	TPDL600	104	TTI021	80
TCO2C-05	83	TPDL600-420	104	TTI022	80
TCO2C-NI1000-01	83	TPDL1000	104	TTI023	80
TCO2C-NI1000-02	83	TPDL1000-420	104	TTUA	89
TCO2C-NTC1.8	83	TPDL1600	104	TTUA-C	88
TCO2C-NTC2.2	83	TPDL1600-420	104	TTUA-CD	88
TCO2C-NTC10-01	83	TPDL2500	104	TTUA-D	89
TCO2C-NTC10-02	83	TPDL2500-420	104	TTUA-D-M	89
TCO2C-NTC10-03	83	TPDL-NIPPEL	104	TTUA-D-NI1000-01	89
TCO2C-NTC20	83	TPDL-R	104	TTUA-D-NI1000-02	89
TCO2C-PT100	83	TPGL1	103	TTUA-D-NTC1.8	89
TCO2C-PT1000	83	TPGL1-420	103	TTUA-D-NTC2.2	89
TF18	54	TPGL2.5	103	TTUA-D-NTC10-01	89
TF18R	54	TPGL2.5-420	103	TTUA-D-NTC10-02	89
TF30	54	TPGL6	103	TTUA-D-NTC10-03	89
TF30R	54	TPGL6-420	103	TTUA-D-NTC20	89
TF60	54	TPGL10	103	TTUA-D-PT100	89
TF60R	54	TPGL10-420	103	TTUA-D-PT1000	89
TF150	54	TPGL16	103	TTUA-M	89
TF150R	54	TPGL16-420	103	TTUA-NI1000-01	89
THxxx	23	TPGL25	103	TTUA-NI1000-02	89
THSxxx	24	TPGL25-420	103	TTUA-NTC1.8	89
TPDA	101	TPGL40	103	TTUA-NTC2.2	89
TPDA12A	102	TPGL40-420	103	TTUA-NTC10-01	89
TPDA12C	102	TPL105074	103	TTUA-NTC10-02	89
TPDA12C2	102	TR15-2D	164	TTUA-NTC10-03	89

TTUA-NTC20	89
TTUA-PT100	89
TTUA-PT1000	89
TUA	87
TUA-C	88
TUA-CD	88
TUA-D	87
TUA-D-M	87
TUA-M	87
TUC1	92
TUC2	92
TUC3	92
TUE1	90
TUE2	90
TUE3	90
TUTC0111	93
TUTC0121	93
TUTC0131	93
TUTC0212	93
TUTC0222	93
TUTC0232	93
TUTC1101	93
TUTC1102	93
TUTC1103	93
TUTC1301	93
TUTC1302	93
TUTC1401	93
TUTC1402	93
TUTC1501	93
TUTC1502	93
TUTC1601	93
TUTC1602	93
TUTC1701	93
TUTC2101	93
TUTC2102	93
TUTE0111	91
TUTE0121	91
TUTE0131	91
TUTE0212	91
TUTE0222	91
TUTE0232	91
TUTE1101	91
TUTE1102	91
TUTE1103	91
TUTE1301	91
TUTE1302	91
TUTE1401	91
TUTE1402	91

TUTE1501	91
TUTE1502	91
TUTE1601	91
TUTE1602	91
TUTE1701	91
TUTE2101	91
TUTE2102	91
TV090	55
TV090U	55
TV090UR85	55
TV09090U	55
TVR6585	55
TVR90110	55
TZ090U	51
TZR6585	51

V

VA7010	155
VA748X	155
VF32	150
VF40	150
VF50	150
VF65	150
VF80	150
VFBF215-0.63	142
VFBF215-1.0	142
VFBF215-1.6	142
VFBF215-2.1	142
VFBF215-2.7	142
VFBF220-4.2	142
VFBF220-5.6	142
VFBF225-10	142
VFBF232-16	142
VFBF240-25	142
VFBF250-40	142
VFBF315-0.63	142
VFBF315-1.0	142
VFBF315-1.6	142
VFBF315-2.1	142
VFBF315-2.7	142
VFBF320-4.2	142
VFBF320-5.6	142
VFBF325-10	142
VFBF332-16	142
VFBF340-25	142
VFBF350-40	142
VFBV215	148
VFBV220	148

VFBV225	148
VFBV232	148
VFBV240	148
VFBV250	148
VFBV315	149
VFBV320	149
VFBV325	149
VFBV332	149
VFBV340	149
VFBV350	149
VFD215-0, 4	136
VFD215-0, 25	136
VFD215-0, 63	136
VFD215-1, 0	136
VFD215-1, 6	136
VFD215-1, 25	136
VFD215-2, 5	136
VFD215-4, 0	136
VFD220-5, 0	136
VFD220-6, 3	136
VFD225-8, 0	136
VFD225-10	136
VFD232-12, 5	136
VFD232-16	136
VFD240-20	136
VFD240-25	136
VFD250-31, 5	136
VFD250-40	136
VFD315-0, 63	137
VFD315-1, 6	137
VFD315-1, 25	137
VFD315-2, 5	137
VFD315-4, 0	137
VFD320-5, 0	137
VFD320-6, 3	137
VFD325-8, 0	137
VFD325-10	137
VFD332-12, 5	137
VFD332-16	137
VFD340-20	137
VFD340-25	137
VFD350-31, 5	137
VFD350-40	137
VFDH15-1, 6	141
VFDH15-2, 7	141
VFDH20-6, 3	141
VFDH25-10	141
VFDH32-16	141

VFDH40-27	141	VFG2..N25-10	135	VFMD215-1.6	145
VFDH50-39	141	VFG2..N32-16	135	VFMD215-2.5	145
VFDH65-63	141	VFG2..N40-27	135	VFMD215-4.0	145
VFDH80-100	141	VFG2..N50-39	135	VFMD220-6.3	145
VFDH100-160	141	VFG215-0, 6	134	VFMD225-10	145
VFDH125-215	141	VFG215-1, 0	134	VFMD232-16	145
VFDH150-310	141	VFG215-1, 6	134	VFMD240-25	145
VFFG225-6, 3	138	VFG215-2, 5	134	VFMD315-0.4	145
VFFG225-10	138	VFG215-4, 0	134	VFMD315-0.6	145
VFFG232-10	138	VFG220-1, 6	134	VFMD315-0.25	145
VFFG232-16	138	VFG220-2, 7	134	VFMD315-1.0	145
VFFG240-16	138	VFG220-3, 9	134	VFMD315-1.6	145
VFFG240-25	138	VFG220-6, 3	134	VFMD315-2.5	145
VFFG250-31, 5	138	VFG225-6, 3	134	VFMD315-4.0	145
VFFG250-40	138	VFG225-10	134	VFMD320-6.3	145
VFFG265-50	138	VFG232-10	134	VFMD325-10	145
VFFG265-63	138	VFG232-16	134	VFMD332-16	145
VFFG280-80	138	VFG240-10	134	VFMD340-25	145
VFFG280-100	138	VFG240-16	134	VFPI15-150	128
VFFG325-6, 3	139	VFG240-27	134	VFPI15-600	128
VFFG325-10	139	VFG250-27	134	VFPI15-900	128
VFFG332-10	139	VFG250-39	134	VFPI20-600	128
VFFG332-16	139	VFG315-0, 63	135	VFPI20-900	128
VFFG340-16	139	VFG315-1, 0	135	VFPI15-150	129
VFFG340-25	139	VFG315-1, 6	135	VFPI15-600	129
VFFG350-31, 5	139	VFG315-2, 1	135	VFPI15-780	129
VFFG350-40	139	VFG315-2, 7	135	VFPI20-1000	129
VFFG365-50	139	VFG320-4, 2	135	VFPI20-1500	129
VFFG365-63	139	VFG320-5, 6	135	VFPI25-1500	129
VFFG380-80	139	VFG325-10	135	VFPIP15-150	129
VFFG380-100	139	VFG332-16	135	VFPIP15-600	129
VFFG2100-125	138	VFG340-27	135	VFPIP15-780	129
VFFG2100-160	138	VFG350-39	135	VFPIP20-1000	129
VFFG2125-215	138	VF-HL1	149	VFPIP20-1500	129
VFFG2150-310	138	VFL80-79	140	VFPIP25-1500	129
VFFG2200-550	138	VFL265-52	140	VFTR215-0.4	147
VFFG3100-125	139	VFL365-52	140	VFTR215-0.6	147
VFFG3100-160	139	VFL380-79	140	VFTR215-0.25	147
VFFG3125-215	139	VFL2100-124	140	VFTR215-1.0	147
VFFG3150-310	139	VFL2125-200	140	VFTR215-1.6	147
VFFG3200-550	139	VFL2150-300	140	VFTR220-2.0	147
VFG2..N15-0, 63	135	VFL3100-124	140	VFTR220-2.5	147
VFG2..N15-1, 0	135	VFL3125-200	140	VFTR220-4.0	147
VFG2..N15-1, 6	135	VFL3150-300	140	VFTR220-6.0	147
VFG2..N15-2, 1	135	VFMD215-0.4	145	VFTR225-7.0	147
VFG2..N15-2, 7	135	VFMD215-0.6	145	VFTR315-0.4	147
VFG2..N20-4, 2	135	VFMD215-0.25	145	VFTR315-0.6	147
VFG2..N20-5, 6	135	VFMD215-1.0	145	VFTR315-0.25	147

VFTR315-1.0	147
VFTR315-1.6	147
VFTR320-2.0	147
VFTR320-2.5	147
VFTR320-4.0	147
VFTR320-6.0	147
VFTR325-7.0	147
VFTRB225-8	146
VFTRB232-15	146
VFTRB240-20	146
VFTRB325-8	146
VFTRB332-15	146
VFTRB340-20	146
VFX210	132
VFX211	132
VFX212	132
VFX213	132
VFX214	132
VFX235	132
VFX237	132
VFX239	132
VFX310	132
VFX311	132
VFX312	132
VFX313	132
VFX314	132
VFX335	132
VFX337	132
VFX339	132
VFX410	133
VFX411	133
VFX412	133
VFX413	133
VFX414	133
VFX435	133
VFX437	133
VFX439	133
VTP	133

[illegible]

General sales conditions of AB Industrietechnik SRL

THIS ISSUE REPLACES AND CANCELS ALL PREVIOUS ONES AND IS SUBJECT TO MODIFICATION WITHOUT PRIOR NOTICE. THE BUYER FULLY ACCEPTS THESE GENERAL SALES CONDITIONS.

PRICES

The prices mentioned in our current price list are in Euro (€), do not include VAT and, even if confirmed, may be subject to variations due to increases in raw materials and labour costs. If the price is tied to parity between the Euro and a foreign currency, the rate of exchange value is specified by the Banca d'Italia, as indicated in the „Il Sole 24 Ore“ daily newspaper. If the rate of exchange varies by more than 5%, we reserve the right to modify at any time our prices and the discounts applied to current orders. In such a case, the buyer is entitled to withdraw immediately from the order. The said prices do not include transport and insurance costs, import license expenses, customs charges, etc., which are considered chargeable to the Buyer.

Our quotations are not binding for the order; the Buyer accepts our delivery terms.

After issuing our order acknowledgement, the order is confirmed.

For invoices under € 50,00 net a sum of € 10,00 will be applied for management cost.

Neutral products:

are supplied without a surcharge but with a minimum of 50 pieces/part number.

Customized products pad printing:

- cliché cost for colour € 95,00 (max 2 colours)

- tampography on box, min. 100 pieces/order, surcharge of € 1,50 net/piece. For higher quantities, the surcharge may be discussed.

Customized products laser printing:

- cliché costs € 85,00 (grayscale)

- laser printing on plastics min. 20 pieces / order, no surcharges for higher quantities.

The products, wherever possible, can be supplied with a test certificate (part number 103999) at the net price of € 31,00 net + VAT to be requested during the ordering process. Certificates of origin issued by the Chamber of Commerce cost € 50,00. Certificates legalized by foreign embassy min. € 250,00.

PACKING

Packing is included in the sales price. A packaging different from the standard will be invoiced at cost (standard plastic pallets at € 11,00 net each).

TECHNICAL DATA AND DOCUMENTS RELATED TO THE SUPPLY

Weights, dimensions, prices, performance, colours, pictures and other information, including samples characteristics, indicated in AB Industrietechnik Srl's catalogues, price lists, circular letters or other sales and technical literature are merely indicative and not binding, unless AB Industrietechnik Srl expressly refers to them in its quotation or order confirmation.

AB Industrietechnik Srl reserves the right to make changes at any time to its products' technical specifications in order to improve their performance, informing the Buyer in writing in case the above changes are substantial (i.e. changes affecting: products' installation procedures, products' interchangeability features, etc.).

We reserve our rights on all documents referring to the products and/or made available with quotations, acknowledgements or on delivery. Such documents may neither be copied nor made available to third parties without our written agreement. They must be returned to us on request.

SHIPMENT

Shipment is ex our works in Bressanone, unless otherwise agreed. As soon as the goods are handed over to the forwarder, all our obligations are considered fulfilled. Therefore, all expenses and risks will be the Buyer's responsibility without any exceptions, even if the shipping charges are prepaid by us. It is the Buyer's responsibility to insure the goods against damage and/or loss. We therefore cannot be held liable for damage and/or loss.

The shipping rates for Italy are at cost price, and we reserve the right to select the most suitable means of transport. In case of payment by cash on delivery, the fees are always incurred by us and debited to the Buyer.

DELIVERY TERMS

Delivery terms are indicative and are not binding. We cannot be held liable for any production or shipment delay, if such a delay is caused by one of the following reasons: a commercial blockade, difficulties in obtaining raw materials and/or other circumstances beyond our control. In that case we do not accept any penalties and the Buyer renounces any claims for indemnity and/or reimbursement of damages.

We reserve the right to deliver the goods before the agreed date.

CLAIMS

Claims have to be brought to our attention within 8 days after the receipt of the goods, otherwise we will not accept the said claims. Claims do not authorise delays in payment or further price reductions. In case of packing received damaged, the Buyer must inform the forwarder immediately, and send a copy to us for information.

The total liability of AB Industrietechnik Srl, on all claims of any kind, whether in contract, warranty, indemnity, tort (including negligence), strict liability, or otherwise, arising out of the performance or breach of the contract or use of any product, shall not exceed the value of the product such liability is related to.

In no event shall AB Industrietechnik Srl be liable for loss of profit or revenues ("lucro cessante"), loss of use of the product or any associated equipment, claims of Buyer's or third parties for such damages, or for any special, consequential, incidental, indirect or exemplary damages.

PAYMENT TERMS

Invoices are payable in the currency specified in the invoice. Payments must be remitted within the agreed deadline. We reserve the ownership of the goods until the invoice and any accessory expenses have been fully paid. Failure by the Buyer to pay by the due date automatically gives rise to interest, giving us the right to deem the contract cancelled because of such failure, unless we prefer to ask for settlement of the amount due, by recourse to law if necessary, with bank interest and damages added. If the Buyer stops a payment, the outstanding amount becomes immediately due and we will file a petition for bankruptcy. Interest on arrears: in the case of delayed payments, interest on arrears will be calculated at the rate of 8 (eight) points above the official rate of discount of the Banca d'Italia in force at the time such interest was applied.

WARRANTY

All the products supplied by us are guaranteed against construction faults or defects of material for 24 months from the date of delivery, the term by which we shall repair the faulty parts in order to restore correct operation of the appliances. We do not accept any responsibility for direct or indirect damage caused by the use of said appliances. Any return of material must be requested from us in writing, must reach us free our works and will be returned ex our works.

The guarantee is restricted exclusively to the repair at our plant of appliances acknowledged to be defective, whereas all other costs of transport or labour for technical operations on the appliances are charged to the Buyer. The guarantee is voided if the appliances are found to have been tampered with or dismantled. If interventions on appliances not considered to be under guarantee are requested, we reserve the right to debit the Buyer for management of the return € 40,00, spare parts, manpower etc. not included. Errors caused by improper or incorrect use, installation and/or commissioning are not subject to any kind of warranty.

In the event of a dispute, the Buyer accepts that the Bolzano Court of Law is competent and accepts the laws in force in Italy.

BUYER COMMITMENTS

The Buyer is the sole party responsible for the choice of products purchased and for all activities subsequent to sale, namely the installation, handling, assembly, set-up and maintenance of the product at the Buyer's premises. These activities must be carried out in full compliance with the instructions given in the technical documentation. The Buyer must also be in possession of structures and skills (including technological skills) necessary for the correct use of the product.

More specifically, in order to ensure correct installation and subsequent correct function of the product, the Buyer must comply in full and diligently with all obligations listed in the technical documentation.

The Buyer must also comply with and apply all regulations and local rules applicable in the country in which the product is to be used. These include all those concerning the protection of public health and safety and good commercial practice. Any costs relating to the compliance of the product with the rules set out by the legislation of the country in which it is to be used, will be paid for exclusively by the Buyer.

SOFTWARE

Should the product include a software application, the use of this software may, as applicable, be governed by specific, separate terms and conditions of a use license.

AUTHOR'S RIGHTS

Without prior written authorization of AB Industrietechnik Srl, the customer is not allowed to copy or reproduce the contents of AB Industrietechnik Srl's catalogue, in particular technical drawings and pictures, for advertising purposes or the like.

These general sale and delivery conditions are subject to the author's right. Legal action will be taken in case of failure to comply with this right.

CONVERSION CHARTS

	UNIT	FACTOR	UNIT	FACTOR	UNIT
Length	Inches Feet	x 25.4 x 0.3048	= mm = m	x 0.03937 x 3.208	= inches = feet
Area	Square inches Square feet	x 645.16 x 0.0929	= mm ² = m ²	0.00155 x 10.764	= in ² = ft ²
Volume	Cubic inches Cubic feet Cubic feet Pints Imp.gal Imp.gal	x 16387 x 0.02832 x 28.32 x 0.56825 x 4.546 x 0.004546	= mm ³ = m ³ = litre = litre = litre = m ³	0.000061 x 35.31 x 0.0353 x 1.7598 x 0.22 x 220	= in ³ = ft ³ = ft ³ = Pints = Imp.gal = Imp.gal
Mass	lb (pounds)	x 0.4536	= kg	x 2.2046	= lb
Force	lb (pounds)	x 4.448	= N	x 0.22482	= lb
Speed	ft/min	x 0.00508	= m/s	x 196.85	= ft/m
Flow	imp.gal/min Imp.gal/h ft ³ /min	x 0.07577 x 0.000126 x 0.000472	= l/s = m ³ /s = m ³ /s	x 13.2 x 7936.51 x 2118.64	= imp.gal/min = imp.gal/h = ft ³ /min
Heating power	kcal/h	x 1.163	= W	x 0.8598	= kcal/h
Pressure	lb/in ² lb/in ² kg/cm ²	x 0.0689 x 0.0703 x 0.9807	= bar = kg/cm ² = bar	x 14.5 x 14.22 x 1.020	= lb/in ² = lb/in ² = kg/cm ²

	kPa	Pa	bar	mmWC	mWC	MPa	kp/CM ²	psi
1 kPa		1000	0.01	100	0.1	0.001	0.01	0.15
1 Pa	0.001		0.00001	0.1	0.0001	0.000001	0.00001	0.00015
1 bar	100	100000		10000	10	0.1	1	15
1 mmWC	0.01	10	0.0001		0.001	0.00001	0.0001	0.0015
1 mWC	10	10000	0.1	1000		0.01	0.1	1.5
1 MPa	1000	1000000	10	100000	100		10	150
1 kp/cm ²	100	100000	1	10000	10	0.1		15
1 psi	6.666667	6666.667	0.066667	666.6667	0.666667	0.006667	0.066667	

bar	x 14.50377	= psi
bar	x 100	= kPa
kg/cm ²	x 14.22334	= psi
inches Hg	x 0.4912	= psi
N/m ²	x 1.0	= Pa
mbar	x 100	= Pa
°C	x (1.8x°C)+32	= °F
kgcm	x 0.098	= Nm
litre	x 1000	= m ³
gal (IMP)	x 4.5460	= litre
gal (US)	x 3.7854	= litre
gal (IMP)	x 1.20095	= gal (US)



"We believe that listening and being creative are the keys to innovation and smart solutions"

HEAD OFFICE/VISITING ADDRESS

AB Industrietechnik SRL
Via Julius Durst 50
IT-39042 Bressanone (BZ) - Italy
Tel: +39 0472 830626
Fax: +39 0472 831840

MILAN OFFICE

AB Industrietechnik SRL
Viale Monza, 347
IT-20126 Milano (MI) - Italy
Tel: +39 02 00624941

info@industrietechnik.it
www.industrietechnik.it
VAT No. IT02748450216

