

ED-T43L-V

External touch display



Graphic touch display for Corrigo controllers, intended for monitoring and control of an air handling system.

- ✓ Clear and easy interaction
- ✓ Appealing and intuitive design
- ✓ Plug and play

Application

ED-T43L-V is a user-friendly touch display with an appealing design suitable for all types of indoor environments.

Function

The display has a logically structured and easy-to-navigate menu system that makes it easy to read, set and change values. Among many other things the display permits:


- ✓ reading and configuring setpoints and actual values
- ✓ viewing and handling alarms
- ✓ starting/stopping the air handling unit
- ✓ configuring time channels
- ✓ changing fan settings
- ✓ setting address, TCP/IP and CLOUDigo settings in the controller

The users have access to different settings depending on the assigned access rights. This makes the display very useful for all kinds of users, from the administrator to the local service technician.

Installation

The display is connected to the display port on the Corrigo controller. Cables of different lengths are available for quick connection. Power is supplied from the controller via the cable.

The display is pre-configured upon delivery and can therefore be used directly. It shows the controller configuration that can be changed with the free software *Application tool*, which can be downloaded from Regin's homepage.

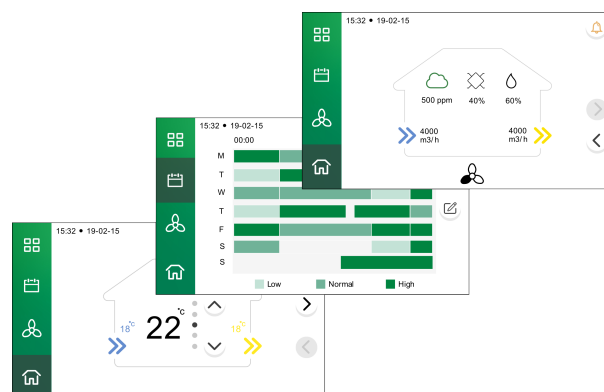

HEAD OFFICE SWEDEN

Phone: +46 31 720 02 00
 Web: www.regincontrols.com
 E-mail: info@regincontrols.com

ED-T43L-V

— 1 (3) —

REGIN
 THE CHALLENGER

Technical data

General data

Supply voltage	24 V DC (22...26 V DC)
Power consumption	1.2 VA
Protection class	IP20
Storage temperature	-20...70 °C
Ambient temperature	0...45 °C
Ambient humidity	5...95 % rH
Dimensions, external (WxHxD)	144 x 96 x 14 mm
Display type	Resistive touch
Touch panel	4.3" TFT-display
Weight (incl. packaging)	0.1 kg

Communication data

Communication ports	1
Port type	RS485
Default protocol	Modbus
Supported protocols	Modbus
Communication speed	19200 bps
Parity	N
Stop bits	1




This product carries the CE-mark. More information is available at www.regincontrols.com.

Accessories

Article	Description
ED-T43L-WM	Wall mount kit for ED-T43L-V
X1111	Power supply unit
EDSP-K3	3 m cable for connecting an external display
EDSP-K10	10 m cable for connecting an external display

Dimensions

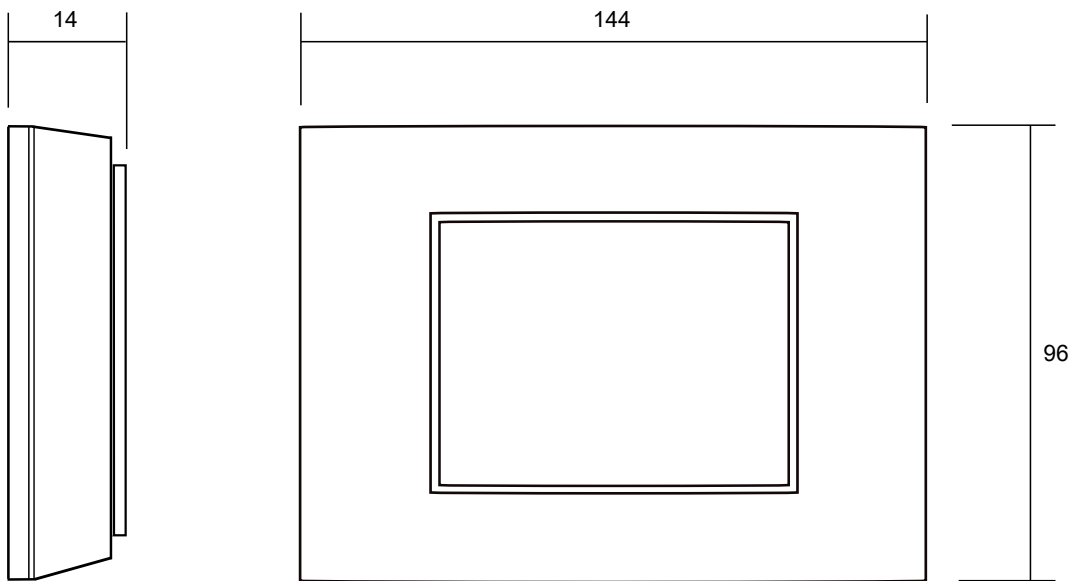

[mm]

Documentation

All documentation can be downloaded from www.regincontrols.com.